



REV.	DATE	DCN #	DRAWING TREE #
A	24th JUNE 2004	E040303-00	

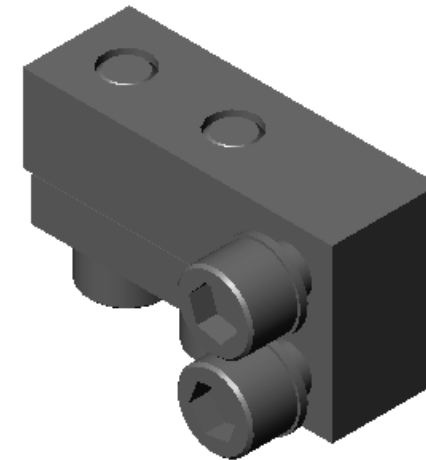

D020318_Assem2_lowerbladewireclamp.step



ALT	1	0	1	D030044	LOWER BLADE WIRE CLAMP PLATE THICK (ALT TO D020133)	300 SSSL
5	1	0	1	D020133	LOWER BLADE WIRE CLAMP PALTE	300 SSSL
4	4	2	6		FLAT WASHERS NAS 620-C2 (OR EQUIV.)	300 SSSL
3	2		2		Ag-SST SOCKET HEAD CAP SCREW #2-56 UNC-3A X 0.1875 LONG	300 SSSL
2	2		2		Ag-SST SOCKET HEAD CAP SCREW #2-56 UNC-3A X 0.25 LONG	300 SSSL
1	1	0	1	D020132	LOWER BLADE WIRE CLAMP	300 SSSL
ITEM NO	REQ.	SPARE	TOT.	PART NUMBER	DESCRIPTION	MATERIAL

PARTS LIST

NOTES: (UNLESS OTHERWISE SPECIFIED) 1. FLY CUT DATUM -A- AND -B- SURFACE TO ACHIEVE FLATNESS OF .001. ② SCRIBE OR ETCH LINE APPROX AS SHOWN .02 DEEP .02 WIDE AFTER FLY CUTTING AND PRIOR TO DISASSEMBLY.	NAME		DATE		 CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY IGR, GLASGOW UNIVERSITY GEO 600 GROUP			
	DRAWN	CIT	11/11/02					
	CHECKED							
					SYSTEM		ADVANCED LIGO	
	DIMENSIONS ARE IN INCHES TOLERANCES: .XX ±:0.01 .XXX ±:0.005 ANGULAR: ±0.5				SUB-SYSTEM		SUS	
					NEXT ASSY		MC: UPPER MASS	
					PART NAME		LOWER BLADE WIRE CLAMP ASSEMBLY	
					SIZE	DWG. NO.	D020318	
	SCALE: NTS		PROJECTION:				SHEET 1 OF 1	

FILE NAME/LOCATION:

1