


SHIP PC	MARK	ASSM PC	DESCRIPTION	LENGTH MM	SPEC	D
1	6-A		FIXED SUPPORT FRAME ASSEMBLY			
	6-1	1	TUBULAR STEEL 102 X 102 X 10 (4 X 4 X 3/8)	1458	A500 GrB	
	6-2	2	TUBULAR STEEL 102 X 102 X 10 (4 X 4 X 3/16)	244	A500 GrB	
	6-3	2	PL 102 X 10 THK (4 X 3/8) W/HOLES	254	A36	
				(0'-10)		
2	6-B		FIXED SUPPORT BRACKET ASSEMBLY			
	6-4	2	PL 102 X 10 THK (4 X 3/8) W/HOLES	254	***	
				(0'-10)		
	6-5	2	PL SK X 10 THK (0'-3/8)		***	
	6-6	4	PL SK X 10 THK (0'-3/8)	203 (8)	***	
4	6-7		MICARTA BLOCK 50 X 50 X 25 (2 X 2 X 1) (GRADE G11) W/HOLES			

*** = SA240 TP304L

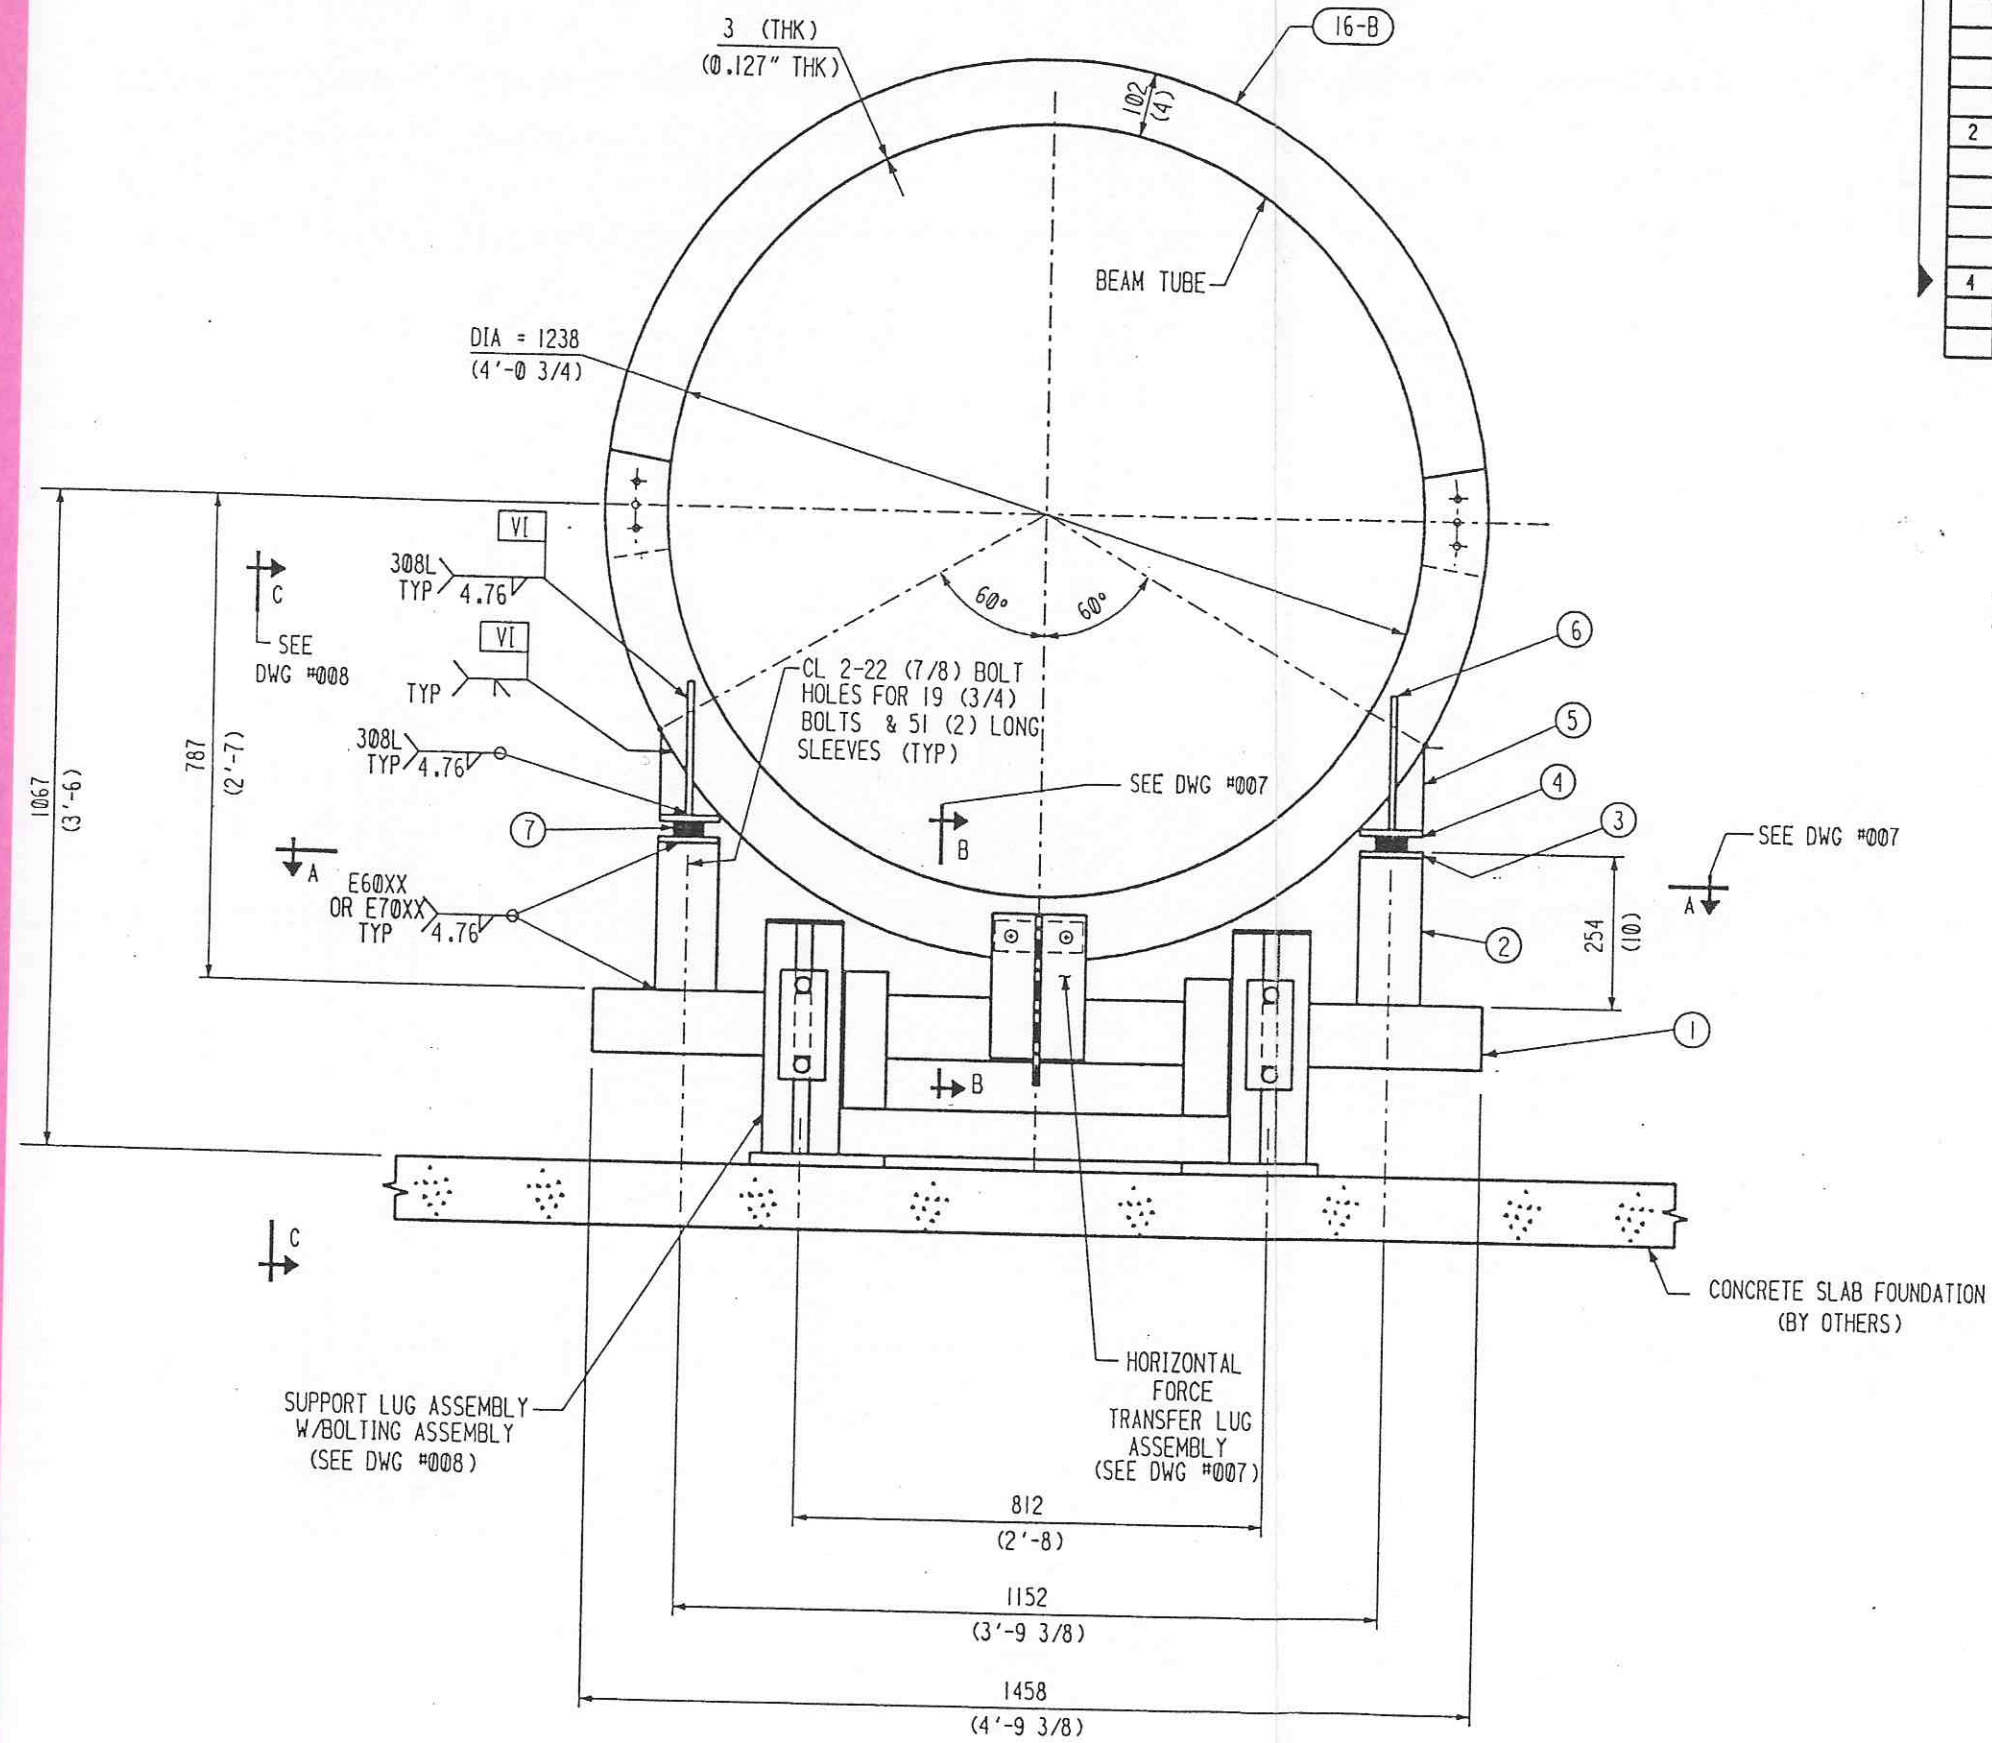

APPROVED

M. Jellalian 11/10/95
CBI DATE

J. Jones 11/10/95
CALTECH DATE

NOTES

1. WORK THIS DWG WITH DWG #007 AND #008.
2. BILLED FOR ONE (1) FIXED SUPPORT. TOTAL OF 392 FIXED SUPPORTS REQD.

Date Rec'd: 11/10/95
 LIGO- D950035-03-B
 Contractor: CBI, L. Rev. 3
 Approved: [Signature]
 Date: 3/29/96
 TIM#: 2.5
 LIGO- C960675-00-Y
 Approved: [Signature]
 Date: / /
 TDM: / /
 LIGO- / /
 Approved: / /
 Gen'l Transmittal / /
 LIGO- / /
 Approved: / /

BEAM TUBE SUPPORT ELEVATION

INDICATES CHANGE FROM PREVIOUS ISSUE

REMOVE NOTE 1 & 2 ADD ASSEMBLY ID AND CHANGE SIZE OF PC BK 7 5-3-95 REVISE SUPPORT LUG ASSEMBLY 12-7-94 DELETED NOTE #3 12-7-94 REV MAT'L, PC WKS. 7-8-94		CBI SUPPLIER / PROMOTER'S NO	
ELEVATION BEAM TUBE FIXED SUPPORT LIGO HANFORD, WA. AND LIVINGSTON, LA.			
CUSTOMER'S NO BY WAW CHKD DET DATE 2-9-94		CONTRACT NO 930212	
BY D.E. THOMM ENGINEERING ASSIGNED		DWG 006 REV 3	
LIGO- D950035-03-B			

3212A006