

This document and the design it covers are the property of PARSONS. They are loaned only with the borrower's expressed written agreement that they will not be reproduced, copied, loaned, exhibited, or used in any other way, except by written consent from PARSONS to the borrower.

PANEL DP_02		LOCATION ROOM 203										VOLTS 480Y/277V				
FED FROM	CKT #	MOUNTING Recessed										MAIN Main lugs				
DP_01	20	PHASE 3			WIRE 4			FEEDER 4*350KCMIL				BUS 225A				
CKT	LOAD SERVED	SLOT	POLES	WIRE SIZE	BKR	VOLT AMPS	PHASE LOAD (VA)			VOLT AMPS	BKR	WIRE SIZE	POLES	SLOT	LOAD SERVED	CKT
							A	B	C							
1	HEATER HC-01	1	3		20	6000	2000	2000	0	9000	20	3	2	HEATER HC-07	2	
		3					2000	2000	0				4			
		5					2000	2000	0				6			
7	HEATER HC-08	7	3		20	9000	3000	3000	0	6000	20	3	8	HEATER HC-05	8	
		9					3000	2000	0				10			
		11					3000	2000	0				12			
13	HEATER HC-06	13	3		20	6000	2000	2000	0	6000	20	3	14	HEATER HC-02	14	
		15					2000	2000	0				16			
		17					2000	2000	0				18			
19	HEATER HC-04	19	3		20	6000	2000	2100	0	6319	20	3	20	SUPPLY CRANE MOTOR	20	
		21					2000	2100	0				22			
		23					2000	2100	0				24			
25	LIGHTS ROOM 202	25	1		20	1800	1800	0	0	1800	20	1	26	SPARE	26	
27	OUTSIDE LTG. ROOM 209	27	1		20	614	0	614	0	180	20	1	28	EMERG BATT PACKS	28	
29	LIGHTS ROOM 203,209	29	1		20	1540	0	1540	0	4230	20	1	30	LIGHTS ROOM 204,205	30	
31	LIGHTS ROOM 208	31	1		20	188	188	0	0	855	20	1	32	LIGHTS ROOM 206,207	32	
33	ROLLUP DOORS	33	3		20	4489	1490	0	42	42	20	1	34	EXIT LIGHTS	34	
		35					0	1490	0	20	20	1	36	SPARE	36	
		37					0	0	1490	20	20	1	38	SPARE	38	
39	SPARE	39	1		20	0	0	0	0	20	20	1	40	SPARE	40	
41	SPARE	41	1		20	0	0	0	0	20	20	1	42	SPARE	42	
TOTAL							21445	20430	25372							
TOTAL CONNECTED LOAD (VA)							67255									
(AMPS)							80.9									

NOTE 5 ON DWG LA-E-008.



PANEL RP_01		LOCATION ROOM 203										VOLTS 208Y/120V				
FED FROM	CKT #	MOUNTING Surface Mount										MAIN 100A				
DP_01	19	PHASE 3			WIRE 4			FEEDER 4*2/0 & 1*4				BUS 100A				
CKT	LOAD SERVED	SLOT	POLES	WIRE SIZE	BKR	VOLT AMPS	PHASE LOAD (VA)			VOLT AMPS	BKR	WIRE SIZE	POLES	SLOT	LOAD SERVED	CKT
							A	B	C							
1	RCPT ROOM 202	1	1		20	1080	1080	0	0	900	20	1	2	RCPT ROOM 202	2	
3	SPARE	3	2		30	0	0	0	0	900	20	1	4	RCPT ROOM 203,204,205	4	
		5					0	0	1080	1080	20	1	6	RCPT ROOM 206,207,208	6	
7	RCPT ROOM 206,207,208	7	1		20	900	900	0	0	240	20	1	8	EXHAUST FAN	8	
9	RCPT ROOM 203,204,205	9	1		20	720	0	720	0	20	20	1	10	SPARE	10	
11	RCPT ROOM 203	11	1		20	720	0	720	0	540	20	1	12	RCPT ROOM 203	12	
13	INCANDESCENT LTS	13	1		20	300	0	0	0	20	20	1	14	SPARE	14	
15	INCANDESCENT LTS	15	1		20	400	0	400	0	20	20	1	16	SPARE	16	
17	PROPANE W.C. IGNITOR	17	1		20	180	0	0	180	20	20	1	18	SPARE	18	
19	SPARE	19	1		20	0	0	0	0	20	20	1	20	SPARE	20	
21	SPARE	21	1		20	0	0	0	0	20	20	1	22	SPARE	22	
23	SPARE	23	1		20	0	0	0	0	20	20	1	24	SPARE	24	
TOTAL							3420	2020	2520							
TOTAL CONNECTED LOAD (VA)							7960									
(AMPS)							22.1									

PANEL VEAC_02B		LOCATION ROOM 202										VOLTS 480Y/277V				
FED FROM	CKT #	MOUNTING Recessed										MAIN 100A				
DP_01	31	PHASE 3			WIRE 4			FEEDER 4*1 & 1*6				BUS 125A				
CKT	LOAD SERVED	SLOT	POLES	WIRE SIZE	BKR	VOLT AMPS	PHASE LOAD (VA)			VOLT AMPS	BKR	WIRE SIZE	POLES	SLOT	LOAD SERVED	CKT
							A	B	C							
1	HEATING BLANKET CART	1	3		40	27000	9000	9000	0	20000	30	3	2	CRYOPUMP REGENERATOR	2	
		3					9000	9000	0				4			
		5					9000	9000	0				6			
7	MAIN TURBO PUMP 1	7	1		20	400	400	0	0	30	30	3	8	SPARE	8	
9	SPARE	9	1		20	0	0	0	0	20	20	1	10		10	
11	SPARE	11	1		20	0	0	0	0	20	20	1	12		12	
TOTAL							16067	15667	15667							
TOTAL CONNECTED LOAD (VA)							47401									
(AMPS)							57									

PANEL VEAC_01B		LOCATION ROOM 203										VOLTS 480Y/277V				
FED FROM	CKT #	MOUNTING Recessed										MAIN 200A				
DP_01	26	PHASE 3			WIRE 4			FEEDER 4*300KCMIL				BUS 225A				
CKT	LOAD SERVED	SLOT	POLES	WIRE SIZE	BKR	VOLT AMPS	PHASE LOAD (VA)			VOLT AMPS	BKR	WIRE SIZE	POLES	SLOT	LOAD SERVED	CKT
							A	B	C							
1	HEATING BLANKET CART	1	3		40	27000	9000	9000	0	20000	30	3	2	CRYOPUMP REGENERATOR	2	
		3					9000	9000	0				4			
		5					9000	9000	0				6			
7	MAIN TURBO PUMP	7	1		20	400	400	0	0	30	30	3	8	SPARE	8	
9	SPARE	9	1		20	0	0	0	0	20	20	1	10	SPARE	10	
11	SPARE	11	1		20	0	0	0	0	20	20	1	12	SPARE	12	
13	SPARE	13	1		20	0	0	0	0	20	20	1	14	SPARE	14	
15	HU-01 RM 203	15	3		20	14000	4667	4667	0	14000	20	3	16	HU-02 RM 203	16	
		17					4667	4667	0				18			
		19					4667	4667	0				20			
21	SPARE	21	1		20	0	0	0	0	20	20	1	22	SPARE	22	
23	SPARE	23	1		20	0	0	0	0	20	20	1	24	SPARE	24	
25	SPARE	25	1		20	0	0	0	0	20	20	1	26	SPARE	26	
27	SPARE	27	1		20	0	0	0	0	20	20	1	28	SPARE	28	
29	SPARE	29	1		20	0	0	0	0	20	20	1	30	SPARE	30	
TOTAL							25401	25001	25001							
TOTAL CONNECTED LOAD (VA)							75403									
(AMPS)							90.7									

NOTE:
 1. PANELS DP_01, DP_02, VEAC_01B AND VEAC_02B ARE TYPICAL FOR END STATIONS A AND B.

ISSUED FOR CONSTRUCTION	DATE	BY	CHKD	ENGR	PROJ	DESCRIPTION
DRAWN	M. M.	11-15-96				
CHECKED	JCL	7-24-96				
ENGINEER	ECR	10-25-96				
PROJ	SPDA	11/15/96				

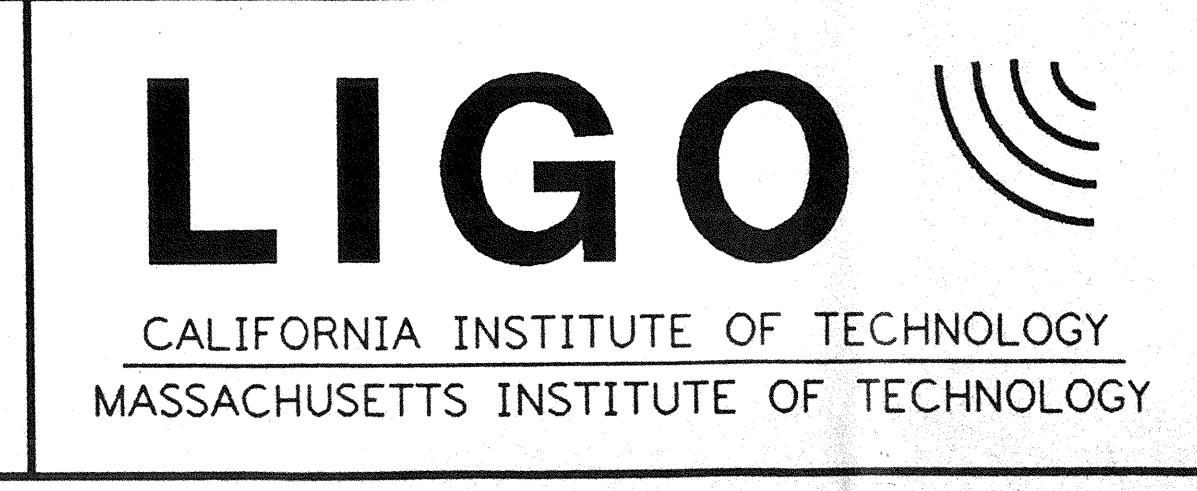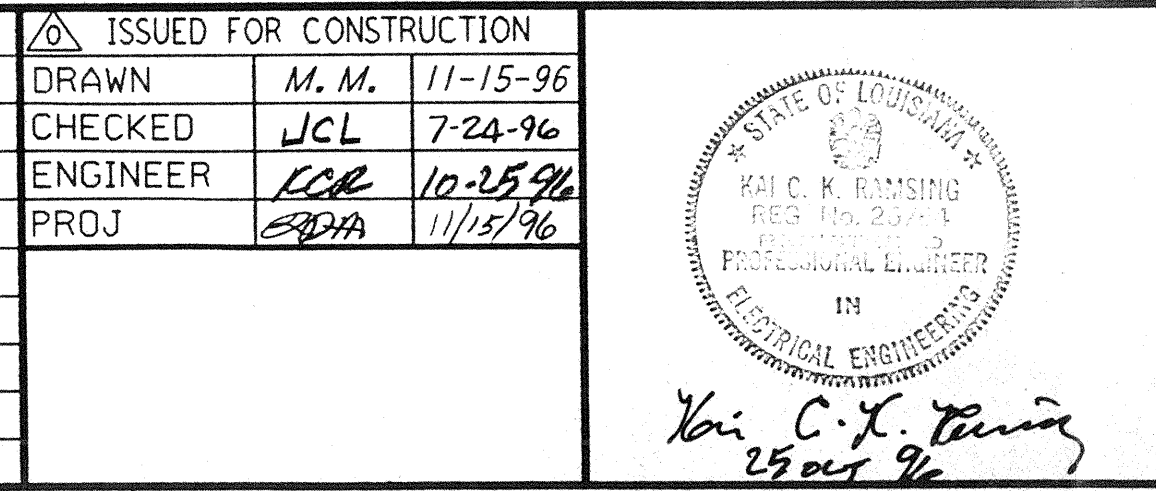

LASER INTERFEROMETER GRAVITATIONAL-WAVE OBSERVATORY SITE NO. 2 - LIVINGSTON, LOUISIANA		
TITLE	SCALE	CONTRACT NUMBER
ELECTRICAL END A AND B STATIONS PANEL SCHEDULES	NONE	PP150969
SHEET NUMBER	PROJECT NUMBER	8094
LA-E-205		