


NOTES:

- 1) 20A, 120V, 3 WIRE WATERTITE RECEPTACLE ITEM #003 WITH WEATHERPROOF COVER AND NAMEPLATE ITEM #019 MOUNTED ON POWER PANEL.
- 2) 30A, 208V, 4 WIRE WATERTITE RECEPTACLE ITEM #005 WITH WEATHERPROOF COVER AND NAMEPLATE ITEM #019 MOUNTED ON POWER PANEL.
- 3) 50A, 208V, 4 WIRE WATERTITE RECEPTACLE ITEM #010 WITH WEATHERPROOF COVER AND NAMEPLATE ITEM #019 MOUNTED ON POWER PANEL.
- 4) FAULT CURRENT = $45,000 \text{ VA} / (208\text{V} \times 1.7321 \times 1.35\%)$
= 9,252 AMPS.

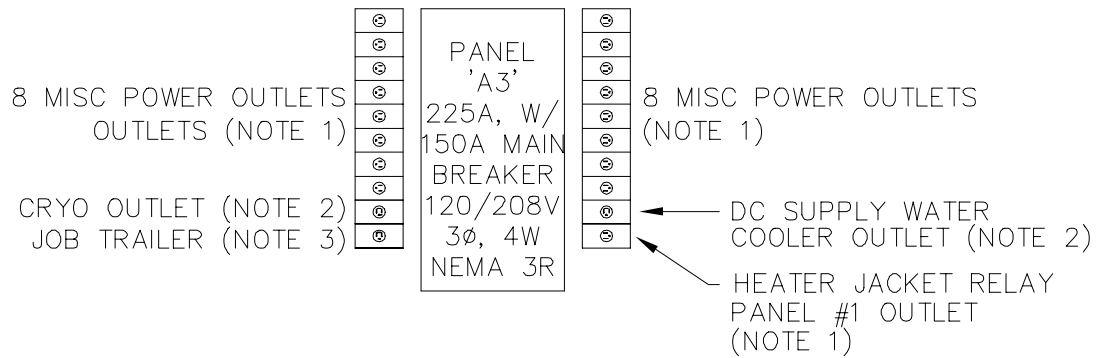

LIGO-D980062-B-W

DEITTLE AND ASSOCIATES, INC.

FILE: PANELA3 DATE: APR 1998

SUB-ASSEMBLY A3-1
PANEL 'A3'