


ITEM	PART NUMBER	SUFFIX	QTY	UM	DESCRIPTION	MATL
1	XX		1	EA	PLATE, 1"x 22 1/4"x 22 1/4"	ALUM
1A	XX		1	EA	PLATE, 1"x 22 1/4"x 22 1/4"	ALUM
2	XX		2	EA	SHEET, 1/8"x 22"x 22"	TEFLON
3	XX		1	EA	PLATE, 1 1/2"x 20 1/4"x 20 1/4"	304 SST
4	XX		1	EA	PLATE, 3/4"x 9"x 10"	304 SST
5	XX		2	EA	PLATE, 3/4"x 8"x 16 3/8"	304 SST
6	XX		1	EA	ROUND, 1 1/2" DIA x 9" LG	304 SST
7	XX		2	EA	PIN, LOCATING, 1/2" DIA x 3 3/4" LG	304 SST
8	XX		1	EA	KEY, 3/8" SQ x 7" LG	304 SST
9	XX		2	EA	ROD, 4" DIA x 1 1/4" LG MCMASTER/CARR #B70IK59	UHMW
10	XX		2	EA	RING, RETAINING, (McM/CARR #91590A139)	SST
11	XX		6	EA	BOLT, HEX HD, 1/2-13UNC-2A x 3 1/4 LG	SST
12	XX		6	EA	WASHER, FLAT, 1/2"	SST
13	XX		6	EA	WASHER, LOCK, 1/2"	SST
14	XX		6	EA	NUT, HEX, 1/2-13UNC	SST
15	XX		1	EA	ROUND, 6" DIA x 7/8" LG	304 SST
16	XX		1	EA	ROUND, 2 1/2" DIA x 2 1/4" LG	304 SST
17	XX		1	EA	SCREW, SET, 1/4-20 x 1/4 LG	304 SST

**ELECTRONIC COPY**

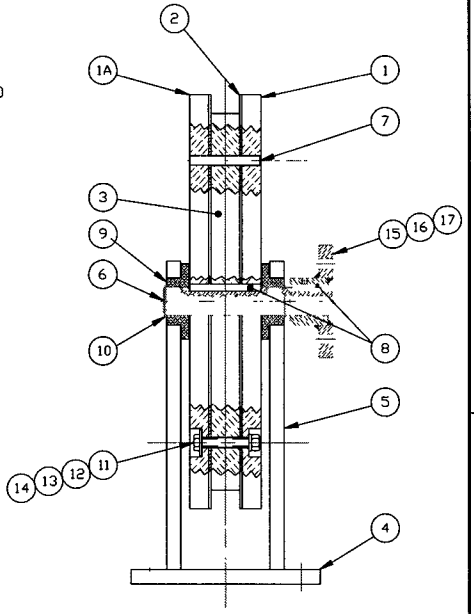

LIGO-D990311-00-V

DWG NO	DESCRIPTION	DWG NO	DESCRIPTION
7	REFERENCE DRAWINGS	6	

DO NOT SCALE THIS DRAWING	0	RELEASE FOR FABRICATION	DA	11/20/96		
USED ON	REV	DESCRIPTION	CHKD	DRWN	DATE	DESD
NEXT ASSY		ISSUE DESCRIPTION				

<b>PROCESS SYSTEMS INTERNATIONAL, INC.</b> 20 WALKUP DR WESTBOROUGH, MASSACHUSETTS 01581 USA			
<b>DRIVE WHEEL ASSY.</b> <b>BSC (LOWER) WASH CART</b> <b>LIGO VACUUM EQUIPMENT</b>			
CAS FILE	SIZE	DWG NO.	REV
V0494149	D	V049-4-149	0
SCALE	SHEET	1 OF 1	

Oct 23, 1996 - 11:33:02

EDUCATION VENDOR... COMMERCIAL USE