


- NOTES: (UNLESS OTHERWISE SPECIFIED)
- 1. ALL ABRASIVE CUTTING TO BE DONE FROM NEAR SIDE.
  - 2. GLASS TO BE COVERED BY VINYL MASK ON BOTH SIDES PRIOR TO START OF MACHINING, AND REMOVED BEFORE SHIPMENT.
  - 3. MAKE FROM: #12 WELDERS FILTER GLASS (SCHOTT) 0.12" THICK.
  - 4. ETCH OR ENGRAVE THE DRAWING PART NUMBER ON NOTED FACE OF PART FOLLOWED BY "S/N", THEN A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS TO START AT 001 FOR FIRST PART A MAXIMUM OF 999, FOR EACH SUCCEEDING PART PRODUCED. USE 0.13 HIGH CHARACTERS. EXAMPLE: D990038-A S/N 001

FARSIDE 4.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES								LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY	
		TOLERANCES: FRACTIONAL ± 1/64 ANGULAR ± 1/2° TWO PLACE DECIMAL ± 01 THREE PLACE DECIMAL ± .005		INSIDE RADII FINISHED SURFACE RMS BREAK OUTSIDE CORNERS .002 - .010 REMOVE ALL BURRS						ARM CAVITY BAFFLE, GLASS 7	
		MATERIAL: 3.	HEAT TREAT:	FINISH: 1. 2. 4.	A	RELEASE	E990389	-	-	-	KABOT 1-13-00
DWG. NO.	DESCRIPTION	USED ON:	NEXT ASS'Y: D980174, D980175, D980176	REV	DESCRIPTION	DCN NUMBER	APPR'D	CHECK	DRWN	DATE	CAD FILE D990499-A.dwg
REFERENCE DRAWINGS				ISSUE DESCRIPTION		SCALE NTS		SHEET 1 OF 2		SIZE DWG. NO. D D990499-A	

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- 1. ALL ABRASIVE CUTTING TO BE DONE FROM NEAR SIDE.
  - 2. GLASS TO BE COVERED BY VINYL MASK ON BOTH SIDES PRIOR TO START OF MACHINING, AND REMOVED BEFORE SHIPMENT.
  - 3. MAKE FROM: #12 WELDERS FILTER GLASS (SCHOTT) 0.12" THICK.
  - 4. ETCH OR ENGRAVE THE DRAWING PART NUMBER ON NOTED FACE OF PART FOLLOWED BY "S/N", THEN A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS TO START AT 001 FOR FIRST PART A MAXIMUM OF 999, FOR EACH SUCCEEDING PART PRODUCED. USE 0.13 HIGH CHARACTERS. EXAMPLE: D990038-A S/N 001

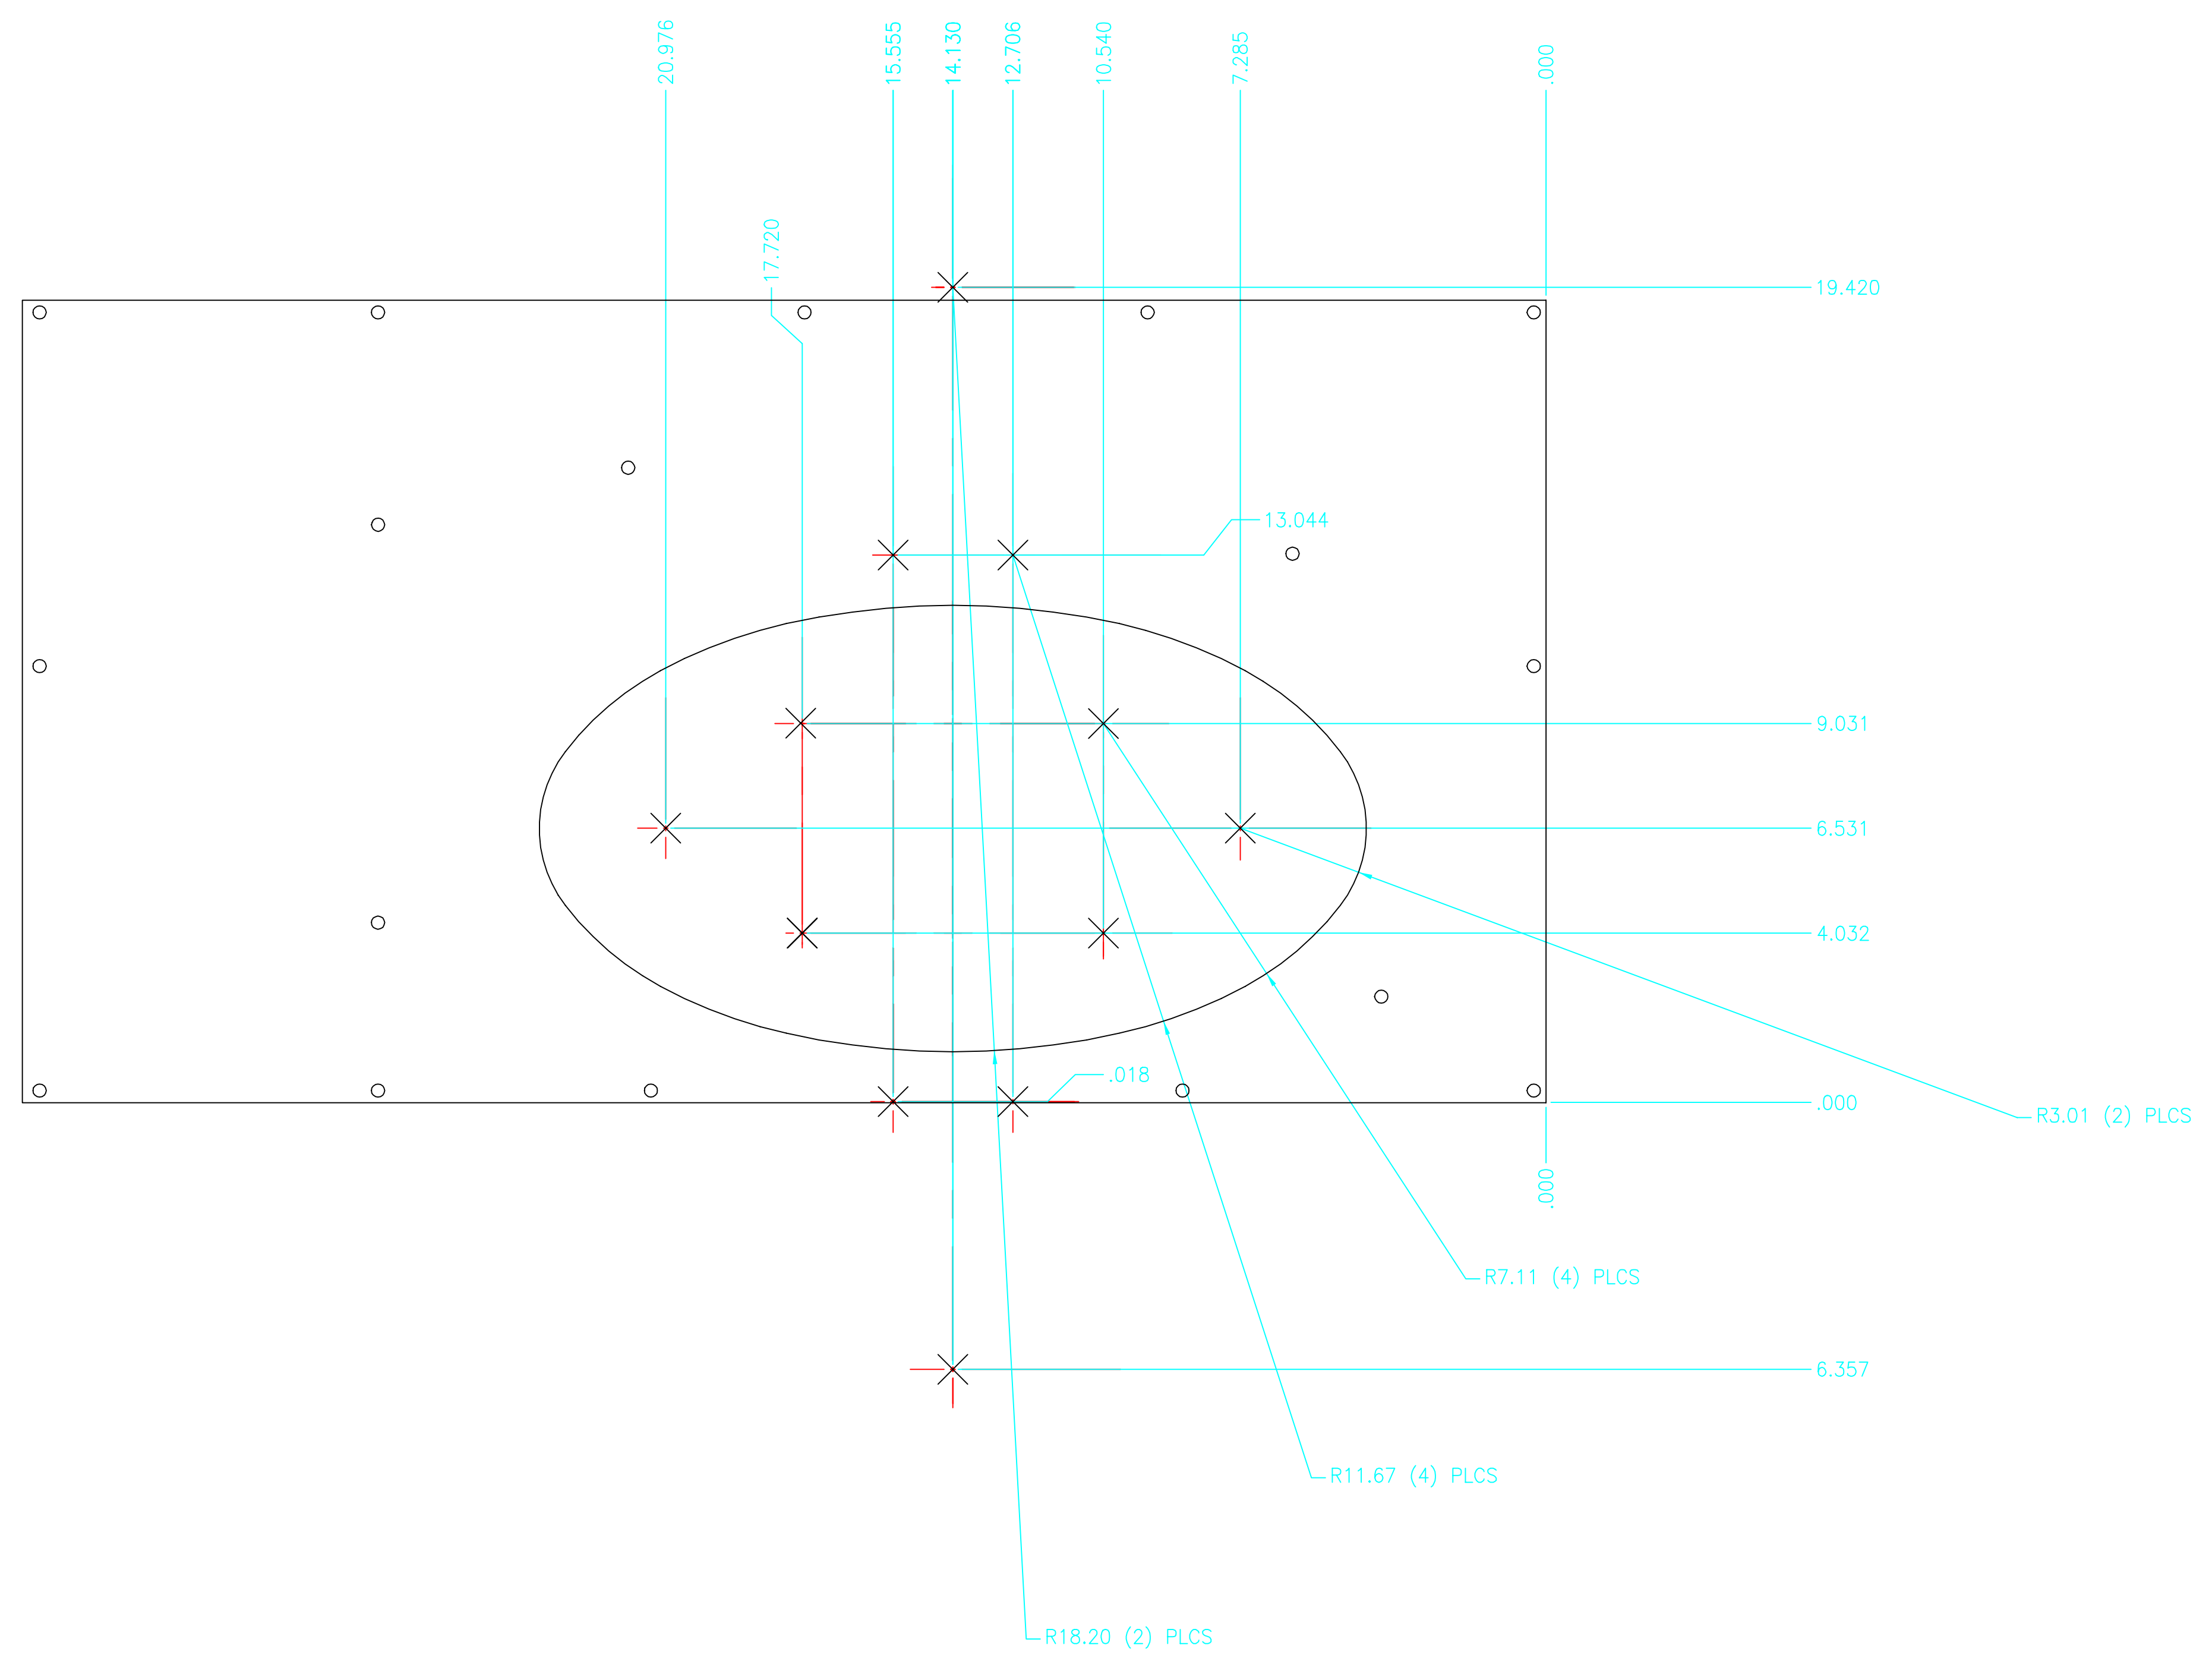

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES

TOLERANCES:  
FRACTIONAL ± 1/64  
ANGULAR ± 1/2°  
TWO PLACE DECIMAL ± .01  
THREE PLACE DECIMAL ± .005

INSIDE RADI:  
FINISHED SURFACE RMS  
BREAK OUTSIDE CORNERS .002 - .010  
REMOVE ALL BURRS

MATERIAL: 3. HEAT TREAT: / FINISH: 1. 2. 4.

USED ON: / NEXT ASS'Y: D980174, D980175, D980176

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

ARM CAVITY BAFFLE,  
GLASS 7

DWG. NO.		DESCRIPTION		A		RELEASE		E990389		-		-		-		KABOT		1-13-00	
REFERENCE DRAWINGS		USED ON:		NEXT ASS'Y: D980174, D980175, D980176		DESCRIPTION		DCN NUMBER		APPR'D		CHECK		DRWN		DATE		SCALE	
																		D990499-A.dwg	
																		D990499-A	
																		2 OF 2	