



REV.	DATE	DCN #	DRAWING TREE #
A	02/JUL/04	E040312-01-K	
B	20/JUL/04	E040345-01-K	
C	26/JUL/04	E040355-01-K	

FLAT BLADE PROFILE

ENGRAVE PART NO.
SEE NOTES

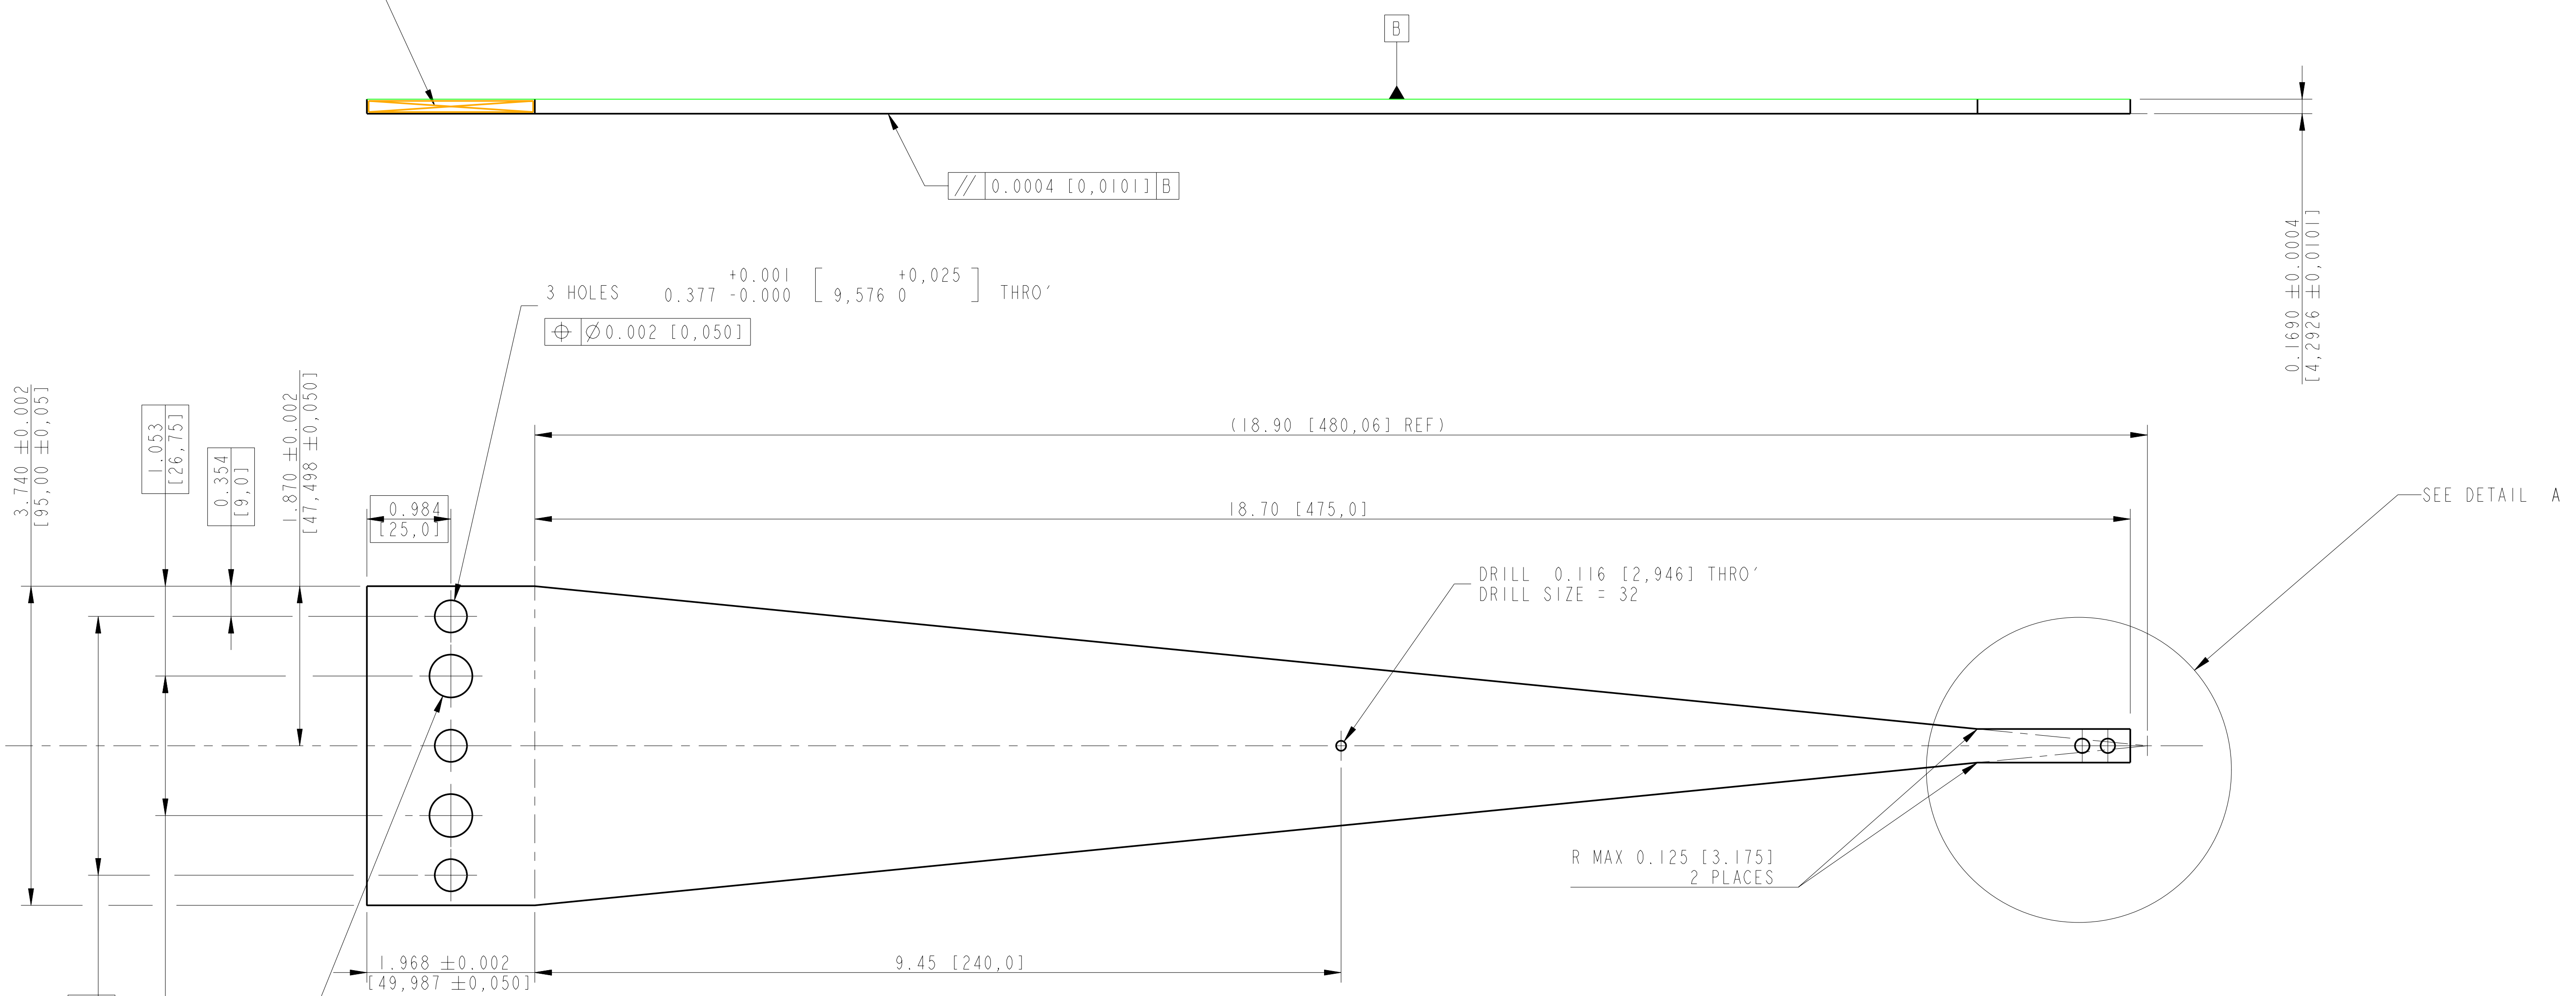

SEE DETAIL A

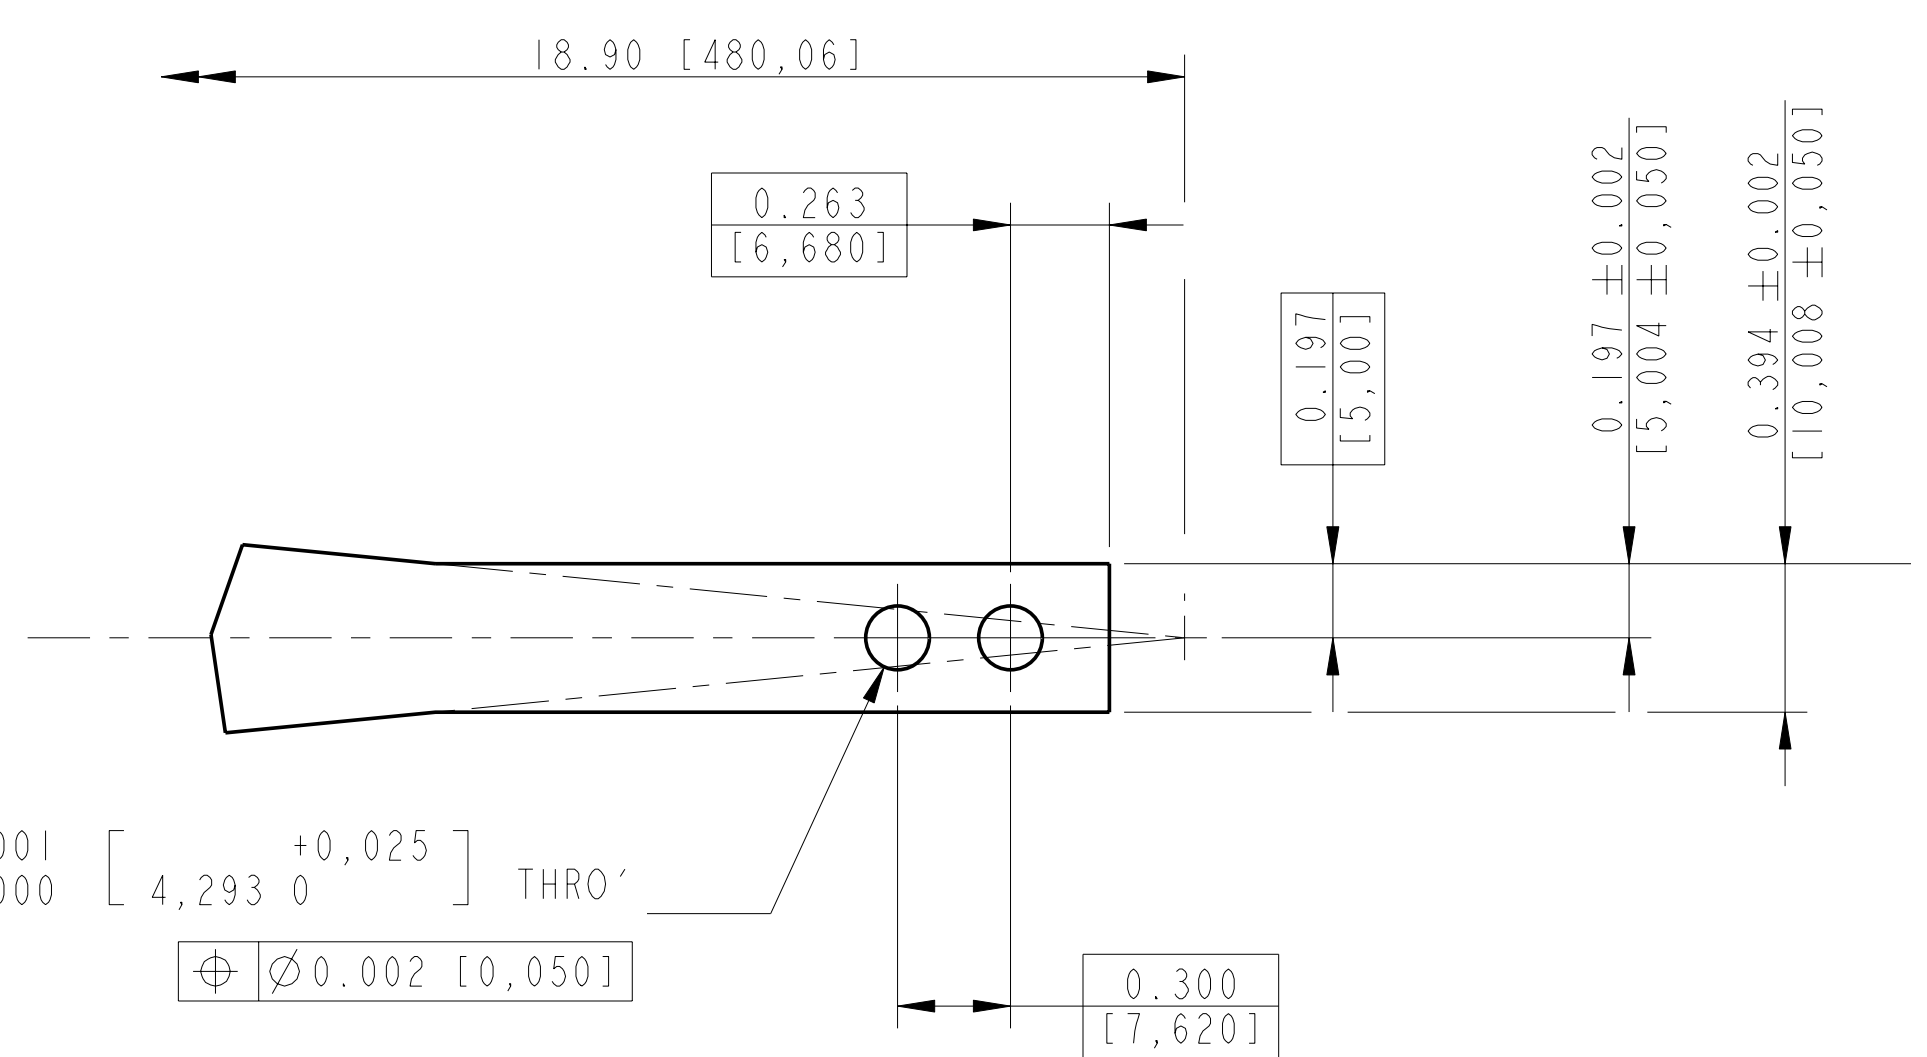

DETAIL A
SCALE 2:1

NOTES: (UNLESS OTHERWISE SPECIFIED)

- DO NOT SCALE FROM DRAWING.
- INTERPRET DIMENSIONS PER: ANSI Y14.5 1982
- ALL MACHINING FLUIDS SHALL BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE AND SILICONE, SUCH AS CINCINNATI MILACON'S CINTECH 410 (STAINLESS STEEL).
- FABRICATE FROM SHEET MATERIAL: FORM RADIUS BY ROLLING.
- REMOVE ALL SHARP EDGES: R 0.02 MIN.
- SCRIBE, ENGRAVE OR STAMP DRAWING PART NUMBER ON NOTED SURFACE OF PART AND A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST PART AND PROCEED CONSECUTIVELY. USE 07" HIGH CHARACTERS. EXAMPLE: 00010P.001. A V BRACKETED TOOL MAY BE USED.
- AFTER PARTS ARE ROLLED TO RADIUS, HARDEN FOR HEAT TREATMENT AT 435 DEG C FOR 100 HOURS AND AIR COOL. PARTS MUST BE SUPPORTED WITH TOOLING DURING HEAT TREATMENT TO AVOID RADIUS CHANGE DUE TO SELF WEIGHT. TOOLING FOR HEAT TREATMENT MAY BE A "SINE BACK" TYPE OF TOOL THAT WILL ALLOW THE PARTS TO BE MOUNTED ON THEIR SIDES. PARTS MAY BE ROLLED AGAIN AFTER HEAT TREATMENT TO ADJUST RADIUS TO SPECIFICATION.

DIMENSIONS ARE IN INCHES (mm)

X.XX ±0.01 TO 250 mm
 X.XXX ±0.005
 ANGULAR ±0.250°

MATERIAL: MACHINING STEEL 250

FINISH: CLEAN AND DEGREASED
 $\sqrt{\sqrt{1.6}} \mu\text{m}$ Ra = 32 TO 81

DRAWN: J. WILMOT 26/JUL/04
 CHECKED: R.J.G. 25/JUL/04
 APPROVED: [Signature]

CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY
 IGR, GLASSON UNIVERSITY GEO 650 GROUP
 WORTHINGTON APPLETON LABORATORIES

SYSTEM: **ADVANCED LIGO**

SUB-SYSTEM: **SUS**

NEXT ASSY: **TOP STAGE**

PART NAME: **TOP STAGE BLADES**

QUAD CONTROLS PROTOTYPE



DRG. NO.: **D040298**

SCALE: 1:1 PROJECTION: [Symbol] SHEET 1 OF 1

FOR INTERNAL USE ONLY:
 E=186Gpa
 ALPHA=1.35
 TOTAL SUSP MASS = 61 KG
 P MASS = 11 KG
 PREDICTED:
 F = 2.33Hz
 1st INTERNAL MODE = 70.26Hz
 σ MAX = 981Mpa
 REF: COMMUNICATION WITH BLADE COMMITTEE

FORMED BLADE SPRING

+0.10
 1.97 -0.00
 [50,0 0]

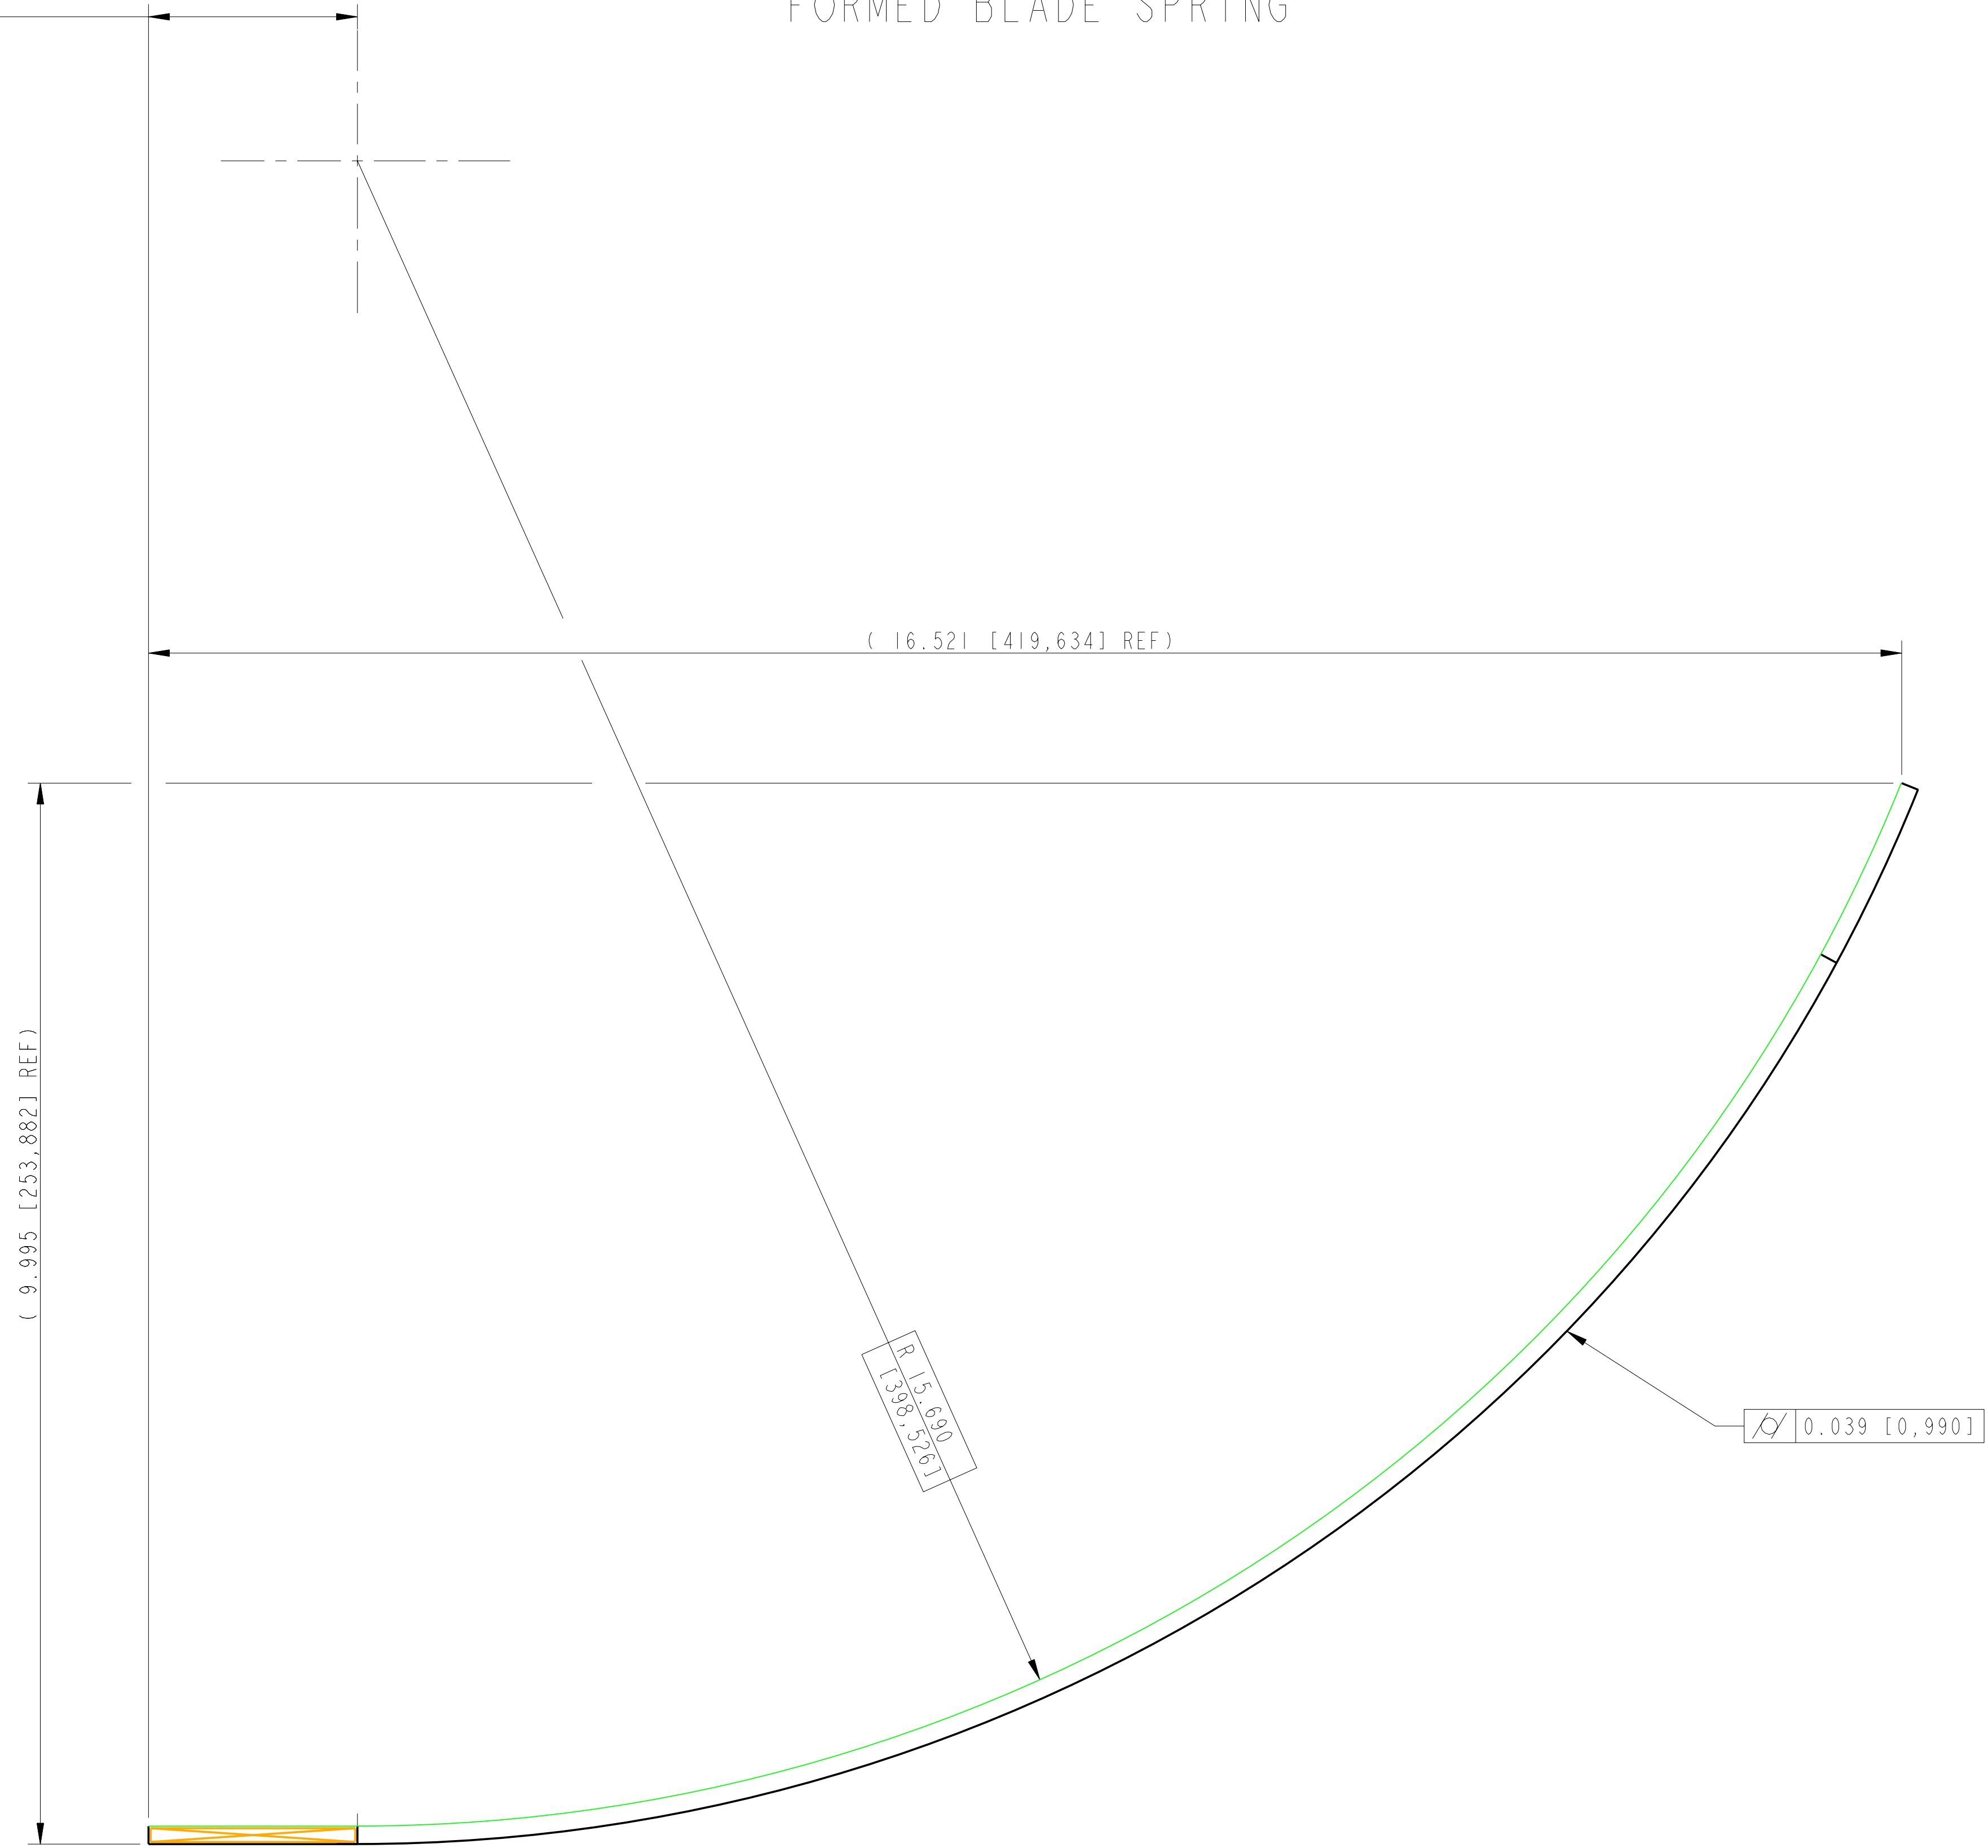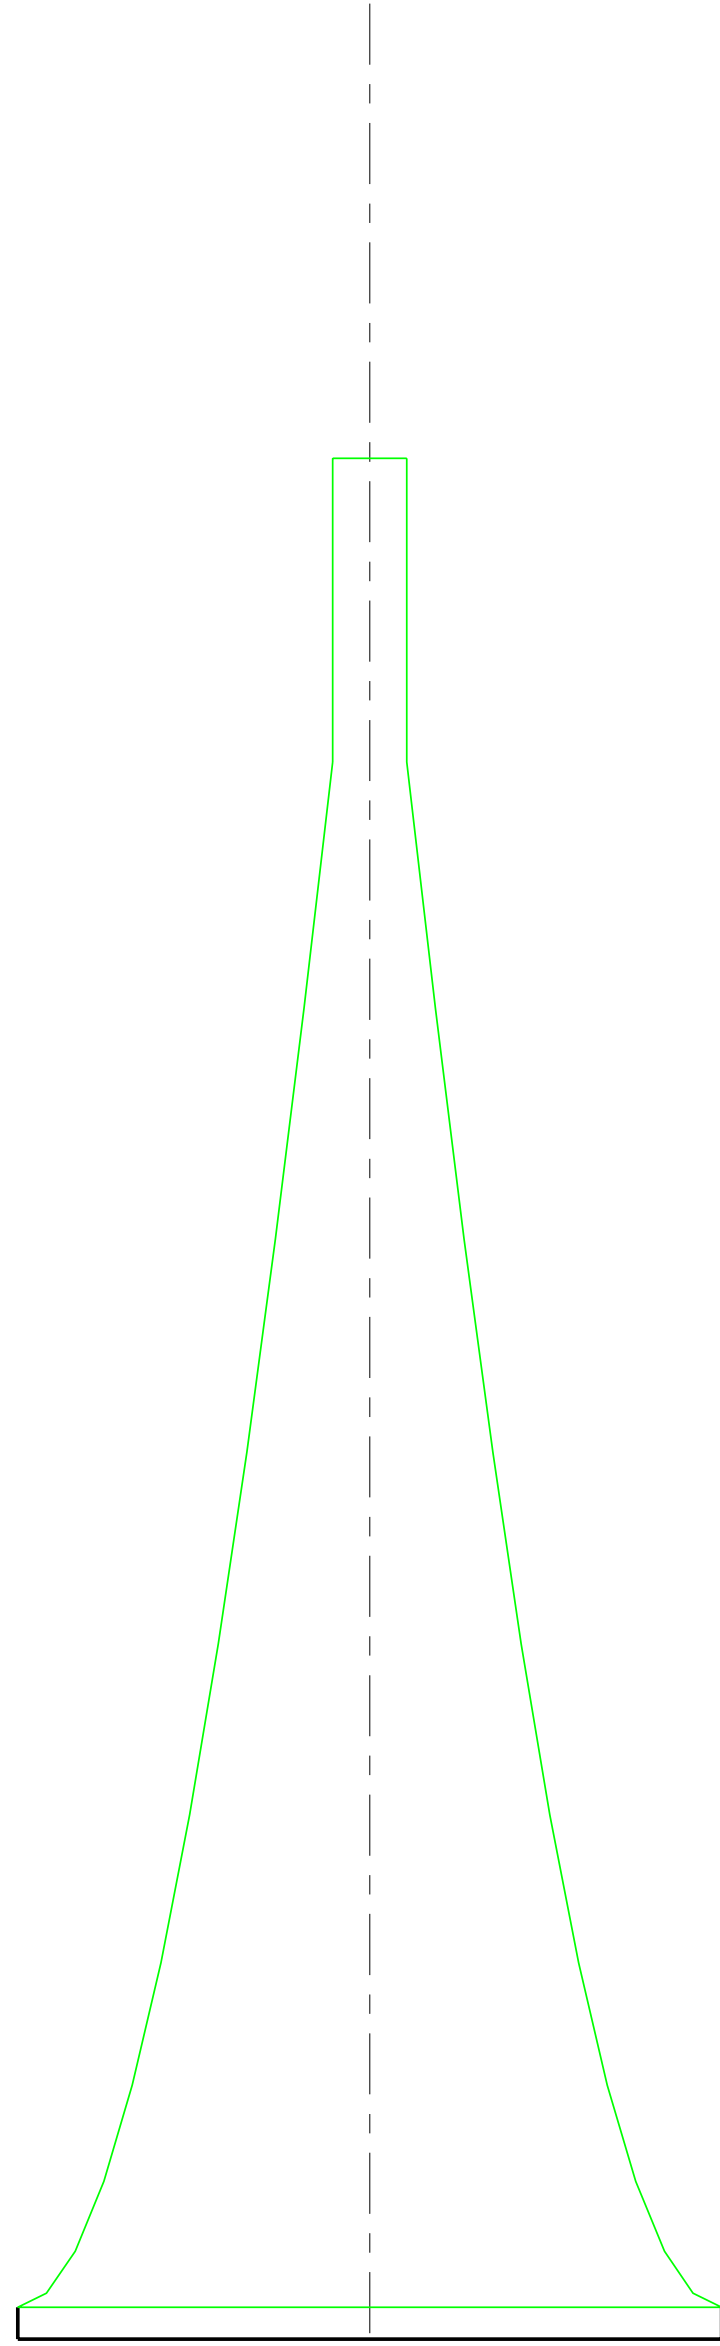

NOTES: (UNLESS OTHERWISE SPECIFIED)

- DO NOT SCALE FROM DRAWING.
- INTERPRET DIMENSIONS PER: ANSI Y14.5 1982
- ALL MACHINING FLUIDS SHALL BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE AND SILICONE, SUCH AS CINCINNATI MILACON'S CIMTECH 410 (STAINLESS STEEL).
- FABRICATE FROM SHEET MATERIAL. FORM RADIUS BY ROLLING.
- REMOVE ALL SHARP EDGES. R.02 MIN.
- SCRIBE, ENGRAVE OR STAMP DRAWING PART NUMBER ON NOTED SURFACE OF PART AND A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST PART AND PROCEED CONSECUTIVELY. USE "01" HIGH CHARACTERS. EXAMPLE: 000100-01. A VIBRATORY TOOL MAY BE USED.
- AFTER PARTS ARE ROLLED TO RADIUS, HARDEN FOR HEAT TREATMENT AT 435 DEG C FOR 100 HOURS AND AIR COOL. PARTS MUST BE SUPPORTED WITH TOOLING DURING HEAT TREATMENT TO AVOID RADIUS CHANGE DUE TO SELF WEIGHT. TOOLING FOR HEAT TREATMENT MAY BE A "SHAKE BACK" TYPE OF TOOL THAT WILL ALLOW THE PARTS TO BE MOUNTED ON THEIR SIDES. PARTS MAY BE ROLLED AGAIN AFTER HEAT TREATMENT TO ADJUST RADIUS TO SPECIFICATION.

DIMENSIONS ARE IN INCHES (mm)
 X.XX ±0.01 (0.250 mm)
 X.XXX ±0.005
 ANGULAR ±0.250 °
 MATERIAL: MARAGING STEEL 250
 FINISH: CLEAN AND DEGREASED
 SURFACE: Ra = 32 (0.8)
 NAME DATE

DRAWN	J. MILMOT	26/JUL/04
CHECKED	R.JG	25/JUL/04
APPROVED		

SCALE: 1:1 PROJECTION: SHEET 2 OF 2

CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY
 IGR, GLASSON UNIVERSITY GEO 600 GROUP
 WORTHINGTON APPLICTION LABORATORIES

SYSTEM: **ADVANCED LIGO**
 SUB-SYSTEM: **SUS**
 NEXT ASSY: **TOP STAGE**
 PART NAME: **TOP STAGE BLADES**
 QUAD CONTROLS PROTOTYPE

DRG. NO.: **D040298**