
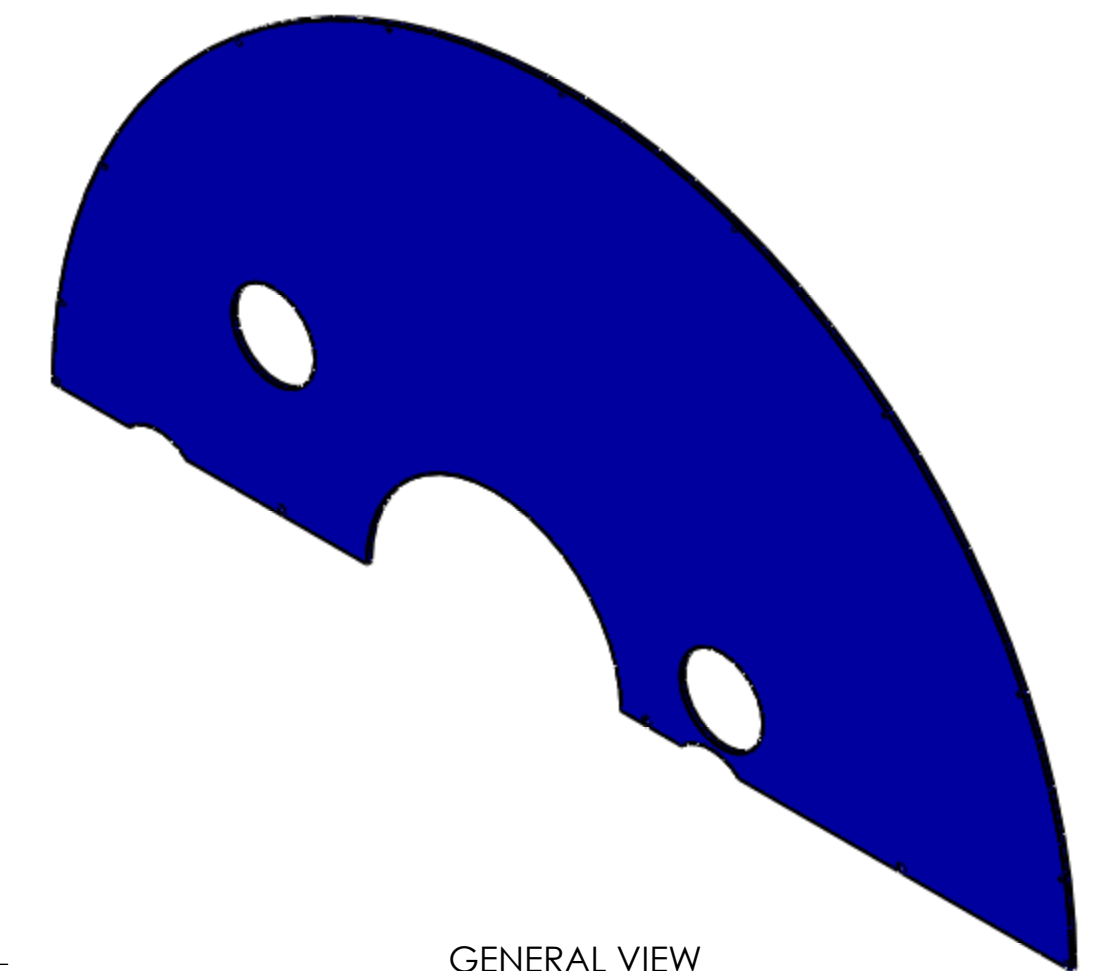


D:\100512\_d\UGO\_MCA3\_Tube\_Baffle\_Upper\_Aperture\_Plate\_MCA3\_PART\_PDM\_REV-X.010\_DRAWING\_PDM\_REV-X.003

- NOTES CONTINUED:**
- 5. SCRIBE, ENGRAVE (A VIBRATORY TOOL MAY BE USED), LASER MARK OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX
  - 6. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH. USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED. REFER TO LIGO-ED900364.
  - 7. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.
  - 8. ALL MATERIAL IS TO BE VIRGIN MATERIAL (i.e. NO WELD REPAIRS, PLUGS OR RECYCLED MATERIAL). NO REPAIRS SHALL BE MADE UNLESS APPROVED IN ADVANCE, AND IN WRITING, BY LIGO LABORATORY. REFER TO LIGO-ED900364.
  - 9. SURFACE FINISH TO BE AS-PROCESSED FROM MILL/SUPPLIER, FREE FROM SCRATCHES OR GOUGES.
  - 10. PART WILL BE PORCELAIN COATED PER LIGO SPECIFICATION E1000083 AFTER FABRICATION. THE INDICATED HOLES WILL BE MASKED PRIOR TO PORCELAIN COATING TO APPROXIMATELY 2.5-3X HOLE DIAMETER CENTERED ON BOTH SIDES OF THE HOLE.
  - 11. DIMENSIONS APPLY BEFORE PORCELAIN COATING UNLESS SPECIFIED.
  - 12. ELECTRO POLISH TO REMOVE .0005-.001 PER SIDE.

REV.	DATE	DCN #	DRAWING TREE #
v1	19 MAY 2011	E1000822-v1	-
-	-	-	-
-	-	-	-

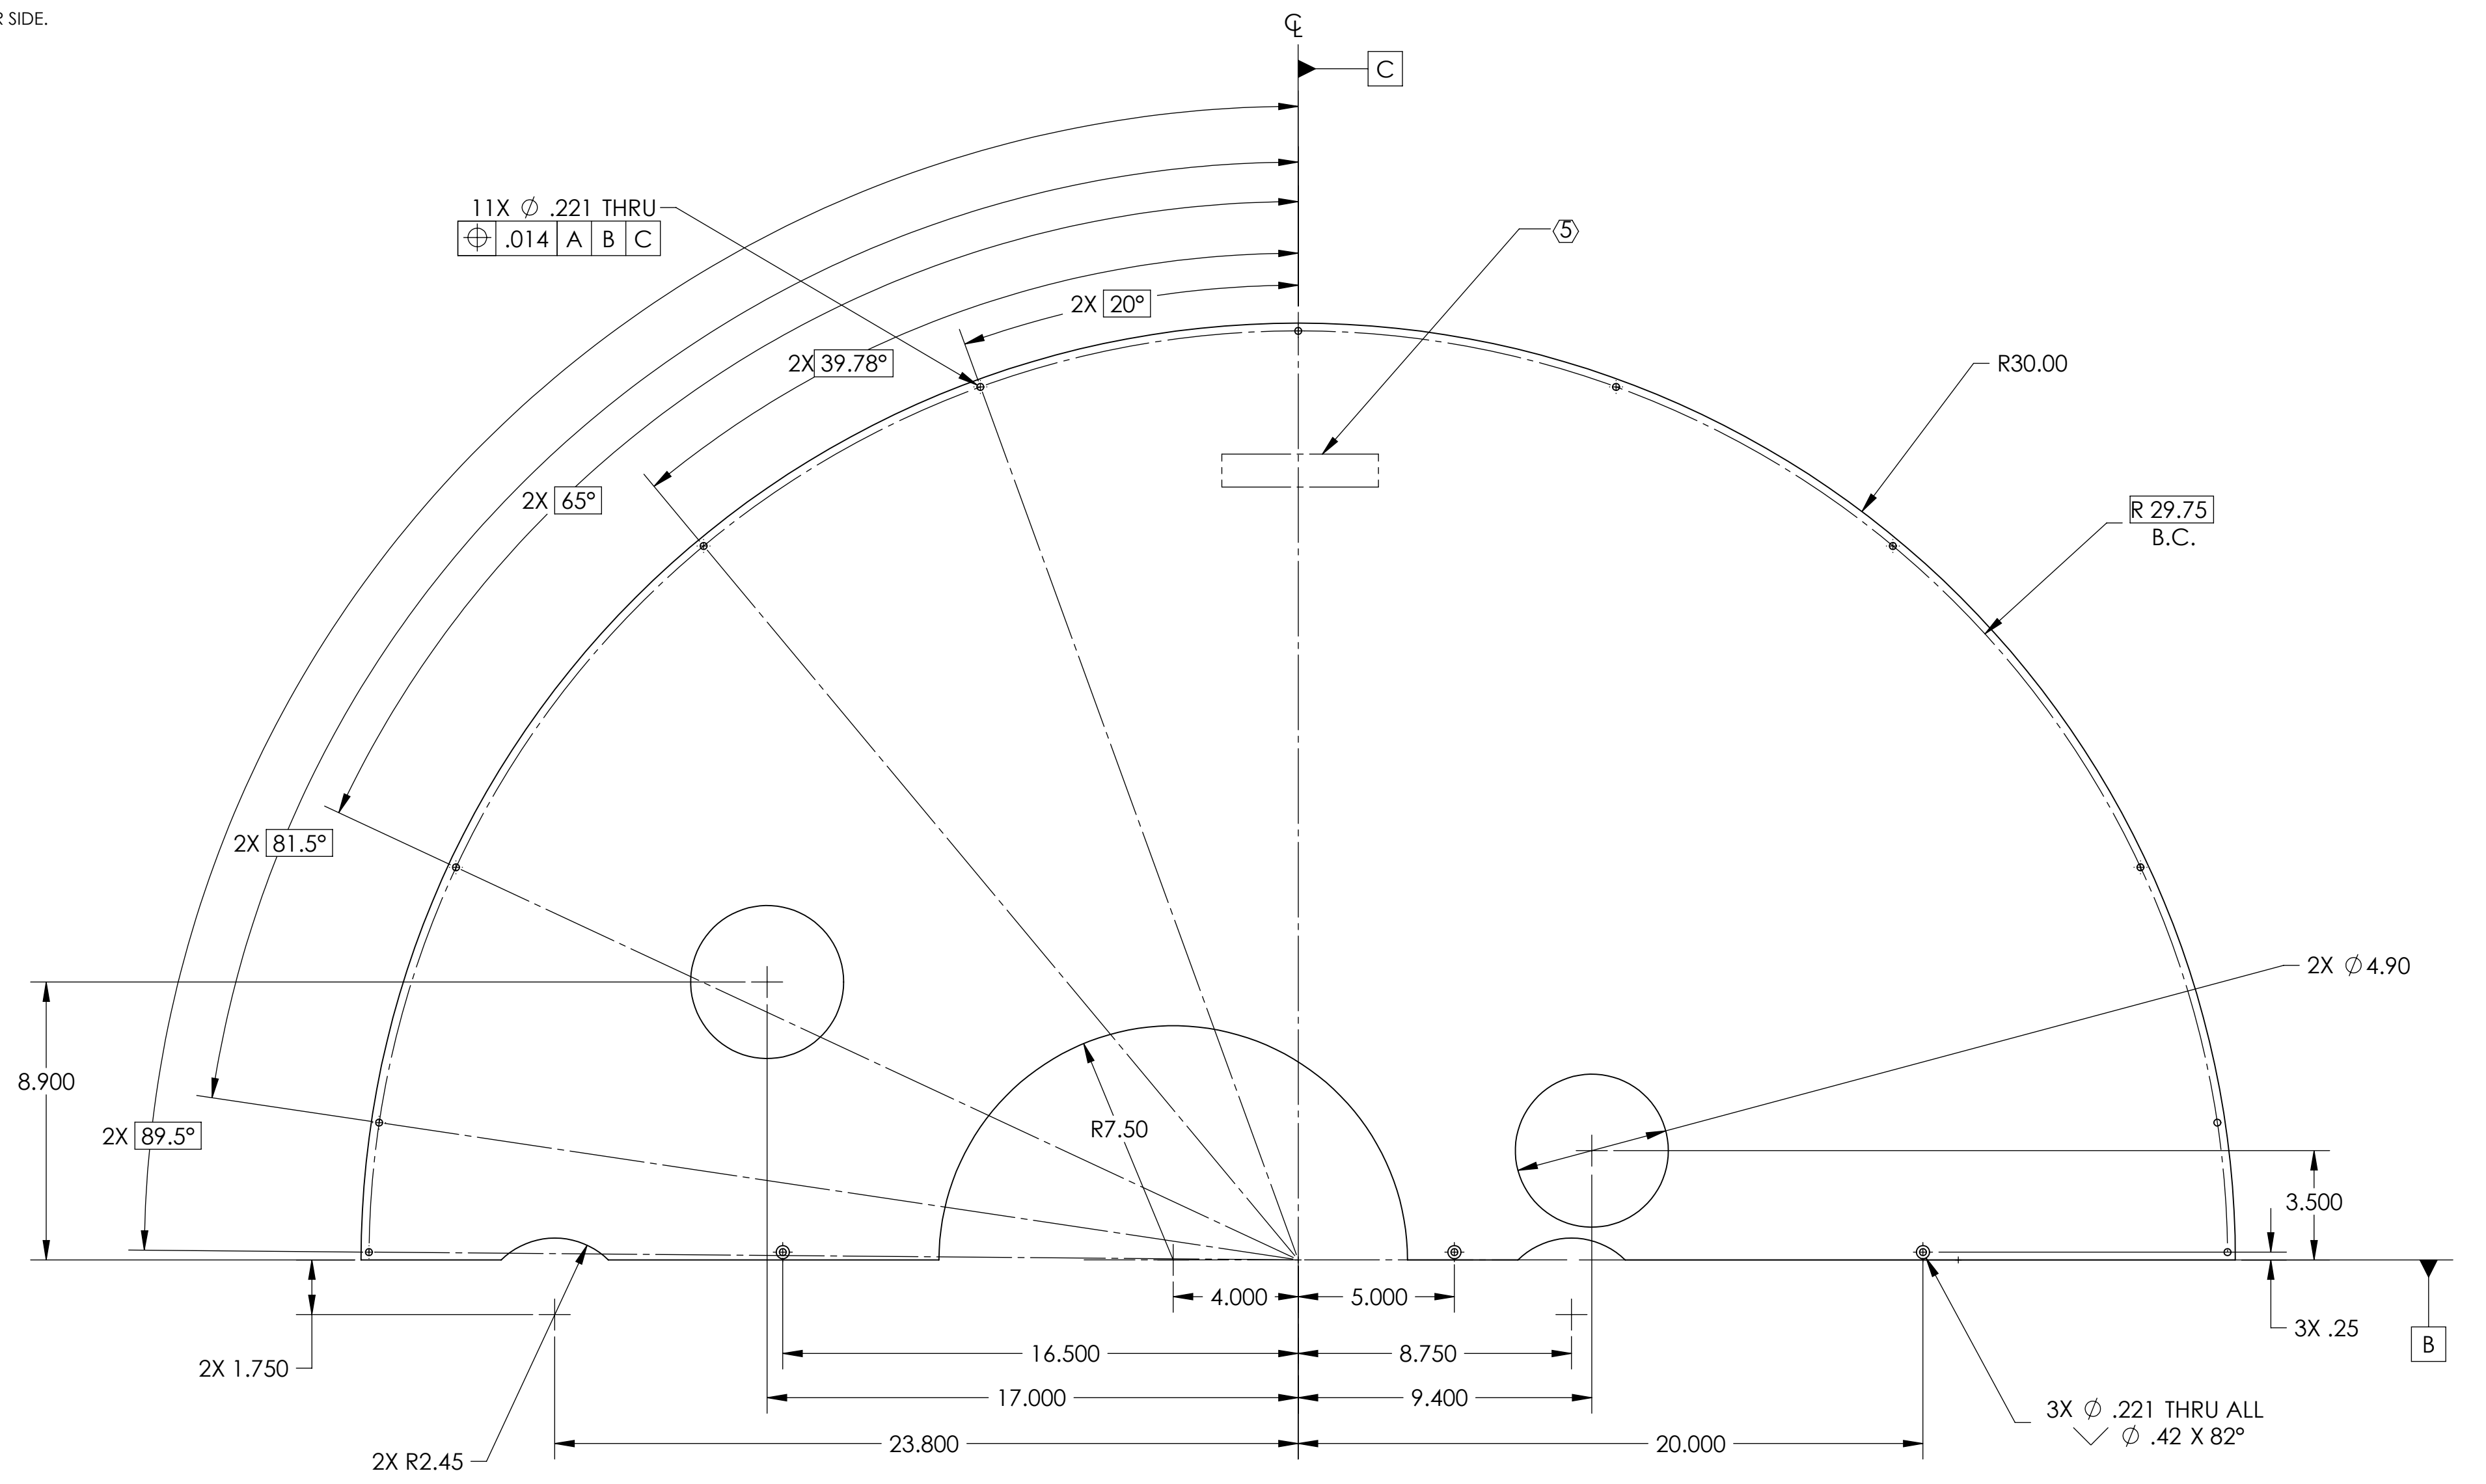

GENERAL VIEW FOR REFERENCE ONLY  
NO SCALE

<p>NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)</p> <p>1. INTERPRET DRAWING PER ASME Y14.5-1994.                  2. REMOVE ALL SHARP EDGES, .005-.015. FOR MACHINED PARTS. ROUND ALL EDGES APPROXIMATELY R.02 FOR SHEET METAL PARTS.                  3. DO NOT SCALE FROM DRAWING.                  4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.</p>		<p><b>LIGO</b> CALIFORNIA INSTITUTE OF TECHNOLOGY                  MASSACHUSETTS INSTITUTE OF TECHNOLOGY</p>		<p>PART NAME                  UPPER APERTURE PLATE, MCA3</p>	
<p>DIMENSIONS ARE IN INCHES [MM]</p> <p>TOLERANCES:                  .XX ± .02                  .XXX ± .010</p> <p>ANGULAR ± 0.5°</p>		<p>SYSTEM                  ADVANCED LIGO</p>		<p>SUB-SYSTEM                  AOS</p>	
<p>MATERIAL                  6061-T6 Al</p>		<p>FINISH                  2B</p>		<p>NEXT ASSY                  D1002864</p>	
<p>DESIGNER                  TQ. NGUYEN</p>		<p>DATE                  19 MAR 2011</p>		<p>SIZE DWG. NO.                  D D1100512</p>	
<p>DRAFTER                  TQ. NGUYEN</p>		<p>DATE                  4 APR 2011</p>		<p>REV.                  v1</p>	
<p>CHECKER                  M. SMITH</p>		<p>APPROVAL                  D. COYNE</p>		<p>SCALE: 1:4 PROJECTION: </p>	
				<p>SHEET 1 OF 1</p>	