




4

3

2

1

REV.	DATE	DCN #	DRAWING TREE #
v1	08 MAY 2015	E1500242-x0	-
-	-	-	-
-	-	-	-

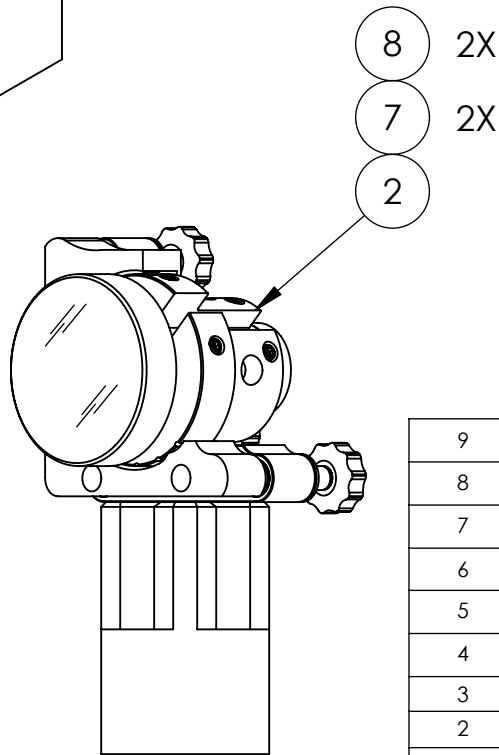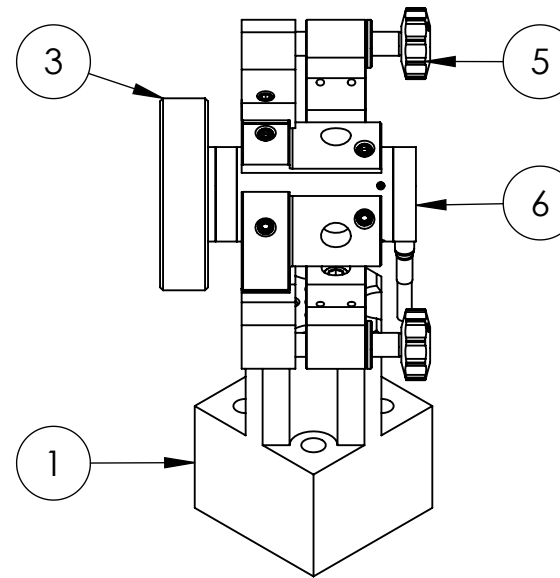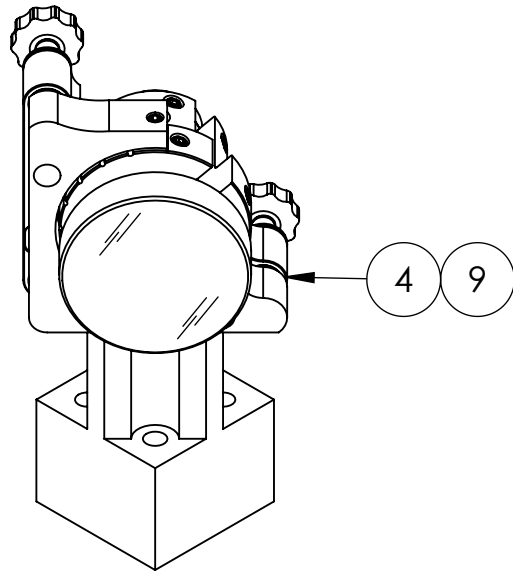

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	REQ
9	MS16995-27 OR EQ.	SCREW, SHC, 8-32 X .63 LG.	300 SSSL	1
8	99553A226 McMASTER-CARR OR EQ.	SET SCREW, 8-32 Thread, 1/2" Long, OVAL POINT	18-8 SSSL	2
7	99553A220 McMASTER-CARR OR EQ.	SET SCREW, 8-32 Thread, 1/4" Long, OVAL POINT	18-8 SSSL	2
6	S-330 .4SD	PIEZO TIP/TILT PLATFORM	-	1
5	AJS100-0.5K-NL NEWPORT OR EQ.	Precision 100 TPI Adjustment Screw, 12.7 mm Travel, Large Knob	-	2
4	U200-A-LH	Ultima Clear Edge Mirror Mount, 2.0 in., Left-Handed, No Actuators	-	1
3	TBD	MIRROR, 2.0 DIA.	-	1
2	D1500166	PSL, PZT Sleeve Clamp	6061-T6 Al	1
1	D1100563	ALIGO IO PSL OPTIC BASE FOR 2" OPTICS ON UF'S PORTION OF PSL TABLE	6061 Alloy	1
PARTS LIST				

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

MATERIAL

N/A

FINISH

N/A μinch

CALIFORNIA INSTITUTE OF TECHNOLOGY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

SYSTEM

ADVANCED LIGO

NEXT ASSY

SUB-SYSTEM

PSL

N/A

PART NAME

PSL, PZT MT.

DESIGNER

E.SANCHEZ 05 AMY 2015

DRAFTER

E.SANCHEZ 08 MAY 2015

CHECKER

SEE DCC SEE DCC

APPROVAL

SEE DCC SEE DCC

SIZE DWG. NO.

A

D1500167

REV.

v1

SCALE: 1:2

PROJECTION:



SHEET 1 OF 1

4

3

2

1