


Notes

1. Custom cable assembled with 1 ea. male PEEK 25 pin connector with mounting ears and 1 ea. female PEEK 9 pin D-type connectors, PEEK backshells(A+ procedure/customer supplied tubes and bands) & PEEK braid along with customer supplied cable. 72" long. (D1700438 v2).

Rev.	Description	Date	Made By	Approval
A	Initial Release	6/15/2021	Farrell	

Connector A	Connector B	Twisted Pair
1	22	A - 22 AWG
2		
3	24	B - 28 AWG
4	25	C - 28 AWG
5		
6	10	A - 22 AWG
7		
8	12	B - 28 AWG
9	13	C - 28 AWG

Connector A



Connector, 9D, Peek, Female
With Strain Relief


PEEK Braid Over
Customer Supplied Teflon Cable
Consisting of 2 Twisted Pairs (28 AWG)
and 1 Twisted Pair (22 AWG).

2x Tube and Band

72.0

Temporary Paper Tag With
PN: 6-105934
SN: D1700438 v2

Connector B

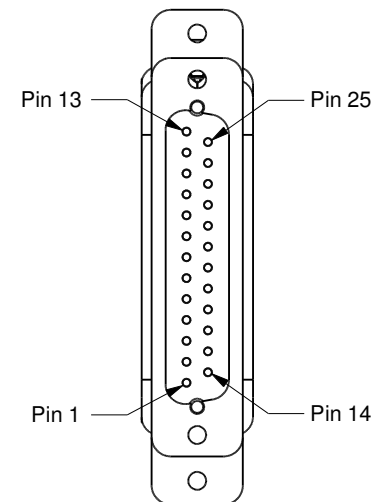

Connector, 25D, Peek, Male
With Ears and Strain Relief



Accu-Glass Products Inc.
25047 Anza Drive
Valencia, CA 91355
T 818-365-4215
F 818-365-7074
www.accuglassproducts.com

UNCONTROLLED WEB DRAWING

Proprietary and Confidential
The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material See Individual Items

Tolerances, unless otherwise specified	
.X ± .030	Angles ± 0.5°
.XX ± .010	Finish 63Ra
.XXX ± .005	

Title

D1700438

Drawn by
Date

Farrell
6/15/2021

No. **6-105934**

Rev.

A

Approved

Sheet