



SECTION B-B

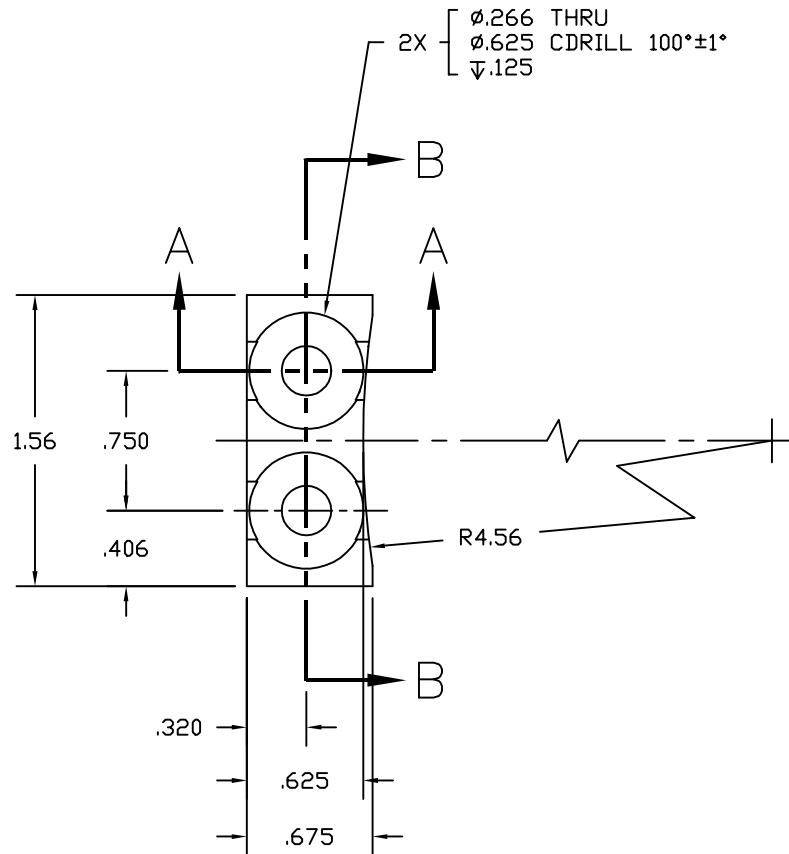

SECTION A-A

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES:
FRACTIONAL ±
ANGULAR ± 5°
ANGULAR MACH ± BEND ±
TWO PLACE DECIMAL ± .03

THREE PLACE DECIMAL ± .005
FINISHED SURFACE 32 MICRINCH AVERAGE
BREAK CORNERS IN: OUT: .005-.010
REMOVE ALL BURRS

MATERIAL:
TEFLON PFA 440 HP

HEAT TREAT:

FINISH:

USED ON:

NEXT ASS'Y: D961425

REV	DESCRIPTION	DCC	SYS	DET	CDS	VE	CC	BT	CHECK	DRWN	DATE
A	DCN E960157										
01	RELEASE FOR FAB										
PA	PRELIMINARY RELEASE										
00	PRE-RELEASE									CONLEY	10-29-96

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

CORE OPTIC COMPONENT CARRIER
BASE PAD

CAD FILE
D961422-A.dwg

SIZE DWG. NO.
A D961422-A-D

SCALE
NTS

SHEET
1 OF 1

ISSUE DESCRIPTION