

# Stabilized laser systems at 1550 nm wavelength for future gravitational wave detectors

FABIAN MEYLAHN,<sup>1,\*</sup> AND BENNO WILLKE<sup>1</sup>

<sup>1</sup>Max-Planck-Institut für Gravitationsphysik (Albert-Einstein-Institut) and Institut für Gravitationsphysik, Leibniz Universität Hannover, Callinstr. 38, 30167 Hannover, Germany

\*fabian.meylahn@aei.mpg.de

## Abstract:

The continuous improvement of current gravitational wave detectors (GWDs) and the preparations for next generation GWDs place high demands on their stabilized laser sources. Some of the laser sources need to operate at laser wavelengths between 1.5  $\mu\text{m}$  and 2.2  $\mu\text{m}$  to support future detectors, based on cooled silicon test masses for thermal noise reduction.

We present a detailed characterization of different commercial low power seed laser sources and power amplifiers at the wavelength of 1550 nm with regard to performance parameters needed in GWDs. A combination with the most complete set of actuators was arranged as a master-oscillator power amplifier (MOPA) and integrated into a stabilization environment. We demonstrate the operation of a pre-stabilized laser system (PSL) and characterize its performance.

We present the results of this characterization that make this PSL to a highly relevant prototype for future GWDs as well as a low noise light source for other experiments in high precision metrology.

<https://dcc.ligo.org/identifier/LIGO-P2100012>

## 1. Introduction

Since the first direct detection of gravitational waves (GWs) from the merge of two black holes in 2015 [1] several further astrophysical events were discovered by gravitational wave astronomy: The merger of two neutron stars confirmed by multi messenger astronomy [2], a multitude of further detections documented in two GW detection catalogs [3,4] and even more GW candidates found in the last observation run of the ground-based gravitational wave detector (GWD) network. This network is comprised by the two Advanced LIGO detectors [5] in the US, the Advanced Virgo detector in Italy [6] and the GEO detector in Germany [7].

The sensitivity of currently operating GWDs is fundamentally limited by quantum noise as well as coating thermal noise of the interferometer mirrors often called test masses. Future GWDs need to reduce in particular these noise contributions to achieve their anticipated ten fold sensitivity improvement. The quantum noise at higher Fourier frequencies can be reduced by increasing the laser power circulating inside the GWD interferometers and can independently be further improved by the injection of squeezed light into the interferometer's output port [8,9]. The coating thermal noise is dependent on the coating properties and temperature. By reducing the temperature of the test masses the coating thermal noise can generally be lowered, unless an increase of the mechanical loss of the coatings at low temperature cancels the direct temperature effect [10]. The first large scale GWD which uses cryogenic temperatures to lower the thermal noise is the KAGRA detector [11], which uses sapphire test masses and a 1064 nm wavelength laser.

Test masses made from silicon are more appropriate for future GWDs, as they are available in high quality and larger sizes than sapphire. As silicon is not transparent at the currently used wavelength of 1064 nm this test mass material needs a laser wavelength between 1.5  $\mu\text{m}$  to 2.2  $\mu\text{m}$  to be successfully implemented in future GWDs [12].

A European design study for a future GWD called the Einstein Telescope proposes three interferometers for the low frequency detection band. These shall have silicon test masses and

1550 nm lasers, which can deliver 3 W of optical power behind the input mode cleaner cavity [13]. This requirement translates to an output power of the lasers of roughly 5 W. The LIGO Voyager and Cosmic Explorer, future plans for GWDs in the US, shall use laser powers from 200 W up to 1 kW with a laser wavelength compatible with silicon optics [14, 15].

Ground-based GWDs generally place very high demands to the laser systems. The laser sources have to be single frequency, single mode, linear polarisation and low noise. In particular the frequency noise, power noise and beam pointing noise in the detection band between a few hertz and typically a few kilohertz is most essential. The second important frequency band is the one used for phase modulation of the interferometer's length and alignment control systems. This band spans from a few megahertz up to 200 MHz.

As no free-running laser meets the demanding GWD stability requirements multiple stages of active feedback control and passive noise filtering are needed in the so called laser pre-stabilization to prepare the lasers for injection into the GWD interferometers.

Frequency stabilization of low power lasers in the range of 1.5  $\mu\text{m}$  wavelength were reported from various fields, like the stabilization for a frequency comb [16], stabilization to ultra stable silicon cavities [17] or stabilization to a high Q fiber resonator [18]. Also a frequency and power stabilized system with fiber optics and an output power of 10 mW was demonstrated [19]. None of these experiments simultaneously achieves the GWD stability requirements for all relevant laser parameters and only parts of technologies needed for a GWD PSL are demonstrated.

In this paper we report on a full GWD PSL at 1.5  $\mu\text{m}$ . We used a well tested laser characterization tool, the so-called diagnostic breadboard (DBB), that was developed for 1064 nm [20] and adapted for 1550 nm. With this DBB we characterized different seed lasers and power amplifiers and finally the full PSL.

We first tested an external cavity diode laser from RIO [21] and compare our measurements with already published results on this seed laser [22, 23]. Fiber lasers from NKT Photonics [24] with different amplifiers and a seed source from NP Photonics [25] were characterized subsequently. In addition we tested two low power amplifiers, an optical booster amplifier from Thorlabs [26] and a fiber amplifier built in a collaboration with the Laser Zentrum Hannover e.V. [27]. Their free-running laser noise and their actuators for potential use in stabilization control loops are discussed in section 3.

In section 2.2 and 4 we report on an active feedback stabilized system to evolve the laser source to a PSL.

With this work we present, to our knowledge, the first stabilized laser system at 1550 nm wavelength with a simultaneous frequency and power stabilizations adequate for use in future GWDs.

## 2. Experimental setup

For the laser characterization a DBB for 1550 nm based on the original 1064 nm version [20] was built. We used 1550 nm optics and germanium quadrant photodiodes and increased the transimpedance gains of the photodiodes. The increased the transimpedance gains are to allow measurements at input power of 5 mW to 35 mW as compared to the standard DBB with maximal 150 mW input power. A schematic layout of the DBB can be seen in right part of Fig. 1.

With this DBB we analyzed free space laser beams in their noise and spatial mode properties. A beam is coupled via two adjustable mode-matching lenses and two piezo alignment mirrors to a triangular Fabry-Pérot resonator. A low noise InGaAs photodiode in front of the resonator is used to perform power noise measurements at Fourier frequencies between 1 Hz and 100 MHz. A photo current of up to 18 mA can be detected. An analysis of the power transmitted by the resonator while scanning its length gives the mode decomposition of the mode-matched incoming beam.

The frequency noise of the laser beam can be measured by stabilizing the resonator length with the dither modulation techniques on resonance for the laser frequency. The dither modulation is imprinted at 1 MHz on the resonator's piezoelectric element. The error signal for the length control loop is generated by demodulation of the light power measured in reflection of the resonator. The error signal and the control signal of the length feedback stabilization is captured to calculate the frequency noise between Fourier frequencies of 1 Hz to 500 kHz.

An equivalent technique in combination with the quadrant photodiodes can be used for differential wavefront sensing based alignment control loops to stabilize the beam pointing [28, 29]. This also enables the measurement of beam pointing noise.

In addition to the noise measurements the calibrated sensors of the DBB are used for transfer function measurements of the laser modulation inputs.

All characterization of the different laser systems are performed in the same setup. For all measurements the beam path and the environmental conditions, like air flow, devices in operation in the lab or room light conditions are kept constant to achieve comparable results. The measurements were performed repeatedly over more than one day to confirm a stable performance of the tested lasers. Modulation inputs of the lasers are terminated or disabled during the noise measurements.

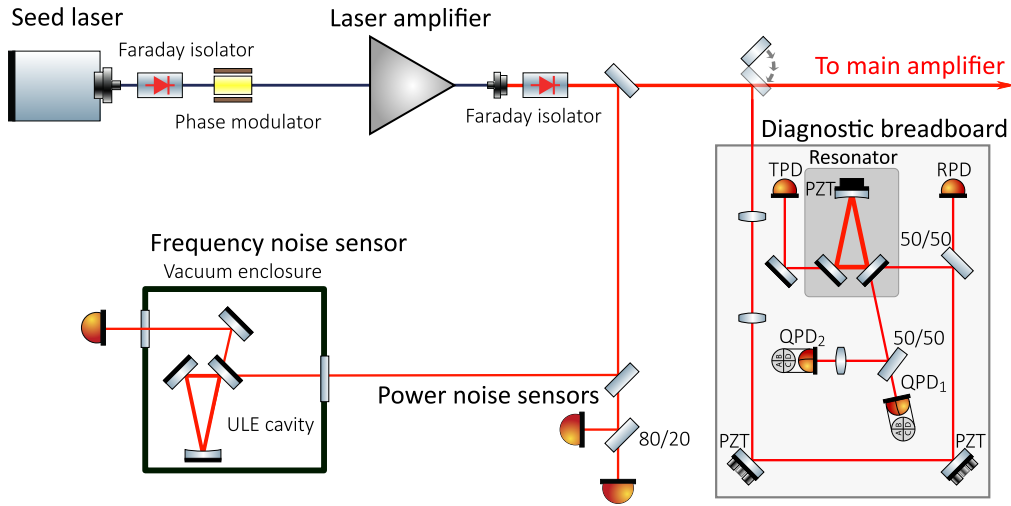


Fig. 1. The simplified stabilization setup shows the seed laser with 1550 nm wavelength, which was coupled via a fiber Faraday isolator to the fiber phase modulator and was amplified by the semiconductor booster amplifier. A Faraday isolator was placed in the 115 mW free space beam. This was to prevent reflections back to the amplifier. Parts of the beam were sent to power sensors and the frequency reference cavity. The main fraction of the beam was analysed with the diagnostic breadboard.

## 2.1. Characterized laser systems

An overview of the characterised seed lasers and laser amplifier are given in Tab. 1.

We have chosen different commercial seed lasers, which are based on different technologies and have promising data sheet specifications for the use in the field of ground-based gravitational wave detection. Single mode, single frequency operation with high stability in power and frequency within the gravitational wave detection band as well as in the MHz range is important. In addition an option for frequency control is needed to further stabilize the laser frequency.

Table 1. Tested laser sources and amplifier

| Product name <sup>a</sup>   | Vendor                           | Technology   | Output power       |
|---|----------------------------------|--|--------------------|
| <b>Seed laser sources</b>   |                                  |  |                    |
| <b>Orion</b> laser source, RIO3135-3-34-5                                     | RIO [21]                         | external cavity diode laser (ECDL)                     | 10 mW              |
| Koheras <b>Adjustik</b> E15, K822-125-102 version 1<br>K822-125-102 version 2 | NKT Photonics [24]               | erbium fiber lasers                                    | 40 mW              |
| <b>NPP Seed laser</b> of a high power laser module                            | NP Photonics [25]                | erbium fiber lasers                                    | 28 mW <sup>b</sup> |
| <b>Pre-amplifier</b>  |                                  |  |                    |
| Booster optical amplifier ( <b>BOA</b> ), BOA1004P                            | Thorlabs [26]                    | semiconductor waveguide amplifier                      | 32 mW <sup>c</sup> |
| <b>Fiber pre-amplifier</b>  | Laser Zentrum Hannover e.V. [27] | erbium fiber amplifier                                 | 50 mW <sup>b</sup> |
| <b>Power amplifier</b>  |                                  |  |                    |
| <b>NKT Boostik 2W</b> , K532-015-100  | NKT Photonics [24]               | erbium fiber amplifier                                 | 2 W                |
| <b>NKT Boostik 10W<sup>d</sup></b> , K532-015-120                             | NKT Photonics [24]               | erbium fiber amplifier                                 | 10 W               |
| <b>RIO Grande</b> laser, RIO1175-9-34-5                                       | RIO [21]                         | erbium fiber amplifier with integrated ECDL seed laser | 2 W                |

<sup>a</sup> The bold marked names are used in the text as a designation for the laser and amplifiers, <sup>b</sup> Measured output power,

<sup>c</sup> Power for -3 dB saturation output power, <sup>d</sup> Two amplifier of this kind were characterized

To achieve a single frequency operation the seed lasers implement a Bragg reflector for distributed feedback [22, 24].

To pre-amplify the seed power two different types of amplifiers were investigated. A BOA based on a fiber coupled InP/InGaAsP quantum well layer structure in a waveguide structure with a measured output power of 117 mW was tested [26]. The characterized fiber pre-amplifier is core pumped at 976 nm wavelength with a Bragg grating stabilized laser diode and was built in cooperation with the Laser Zentrum Hannover e.V. [27]. For both amplifiers an in-house built, low noise current source was used with a fast modulation input (based on [30, 31]).

The Boostik power amplifier were tested with different seed lasers to test their influence on the actuation and noise characteristics.

The tested Grande amplifier has an integrated seed source, which is similar to the Orion laser.

## 2.2. Pre-stabilized laser system

The performance of a pre-stabilized laser system (PSL) is demonstrated with the ECDL and optical booster amplifier and an output power of 115 mW. The combination of the Orion laser and the BOA offer actuators for frequency and power stabilization with a decent range and

bandwidth. A simplified setup is given in Fig. 1.

The laser frequency was stabilized to an ultra low expansion glass ceramic spacer based, triangular reference cavity with a finesse of roughly 59000 and a free spectral range of 702 MHz. Two plane mirrors are optically contacted to the spacer while the curved mirror was glued to it. The cavity is placed with viton vibration isolation pads in a vacuum tank at a pressure of 1 mbar to reduce acoustical noise coupling. The laser frequency was stabilized with the Pound–Drever–Hall (PDH) sensing scheme to the cavity [32].

A fiber phase modulator was integrated to add phase modulation side-bands at 44 MHz for the PDH sensing and as a fast actuator in the frequency stabilization feedback control loop.

For the power stabilization in- and out-of-loop photodiodes with transimpedance amplifier were used. The photodiodes were Perkin Elmer C30642. Both readout electronics are based on photodiode sensors used in the Advanced LIGO PSLs [33]. The in-loop detector has an improved bias circuit and an updated low noise operational amplifiers [34].

### 3. Laser characterization

First the different free-running laser systems and MOPA combinations were characterized with the DBB. The transversal mode purity and the pointing noise of all tested lasers were measured. All show a low higher order mode content, as all lasers have polarisation maintaining, single mode fiber output ports.

The frequency noise measurements in Fig. 2 show that only the seed lasers contribute in the measurement band to the total frequency noise of the modular systems. Small deviations at 100 Hz to 300 Hz are due to slightly different unity gain frequencies for the DBB resonator stabilization loop.

All shown noise measurements are captured as a set of fast Fourier transformed measurements, which were averaged over multiple samples and normalized by the resolution bandwidth to get an amplitude spectral density. Multiple measurements with different spans were performed and stitched together to get the resolution for the logarithmic Fourier frequency scales.

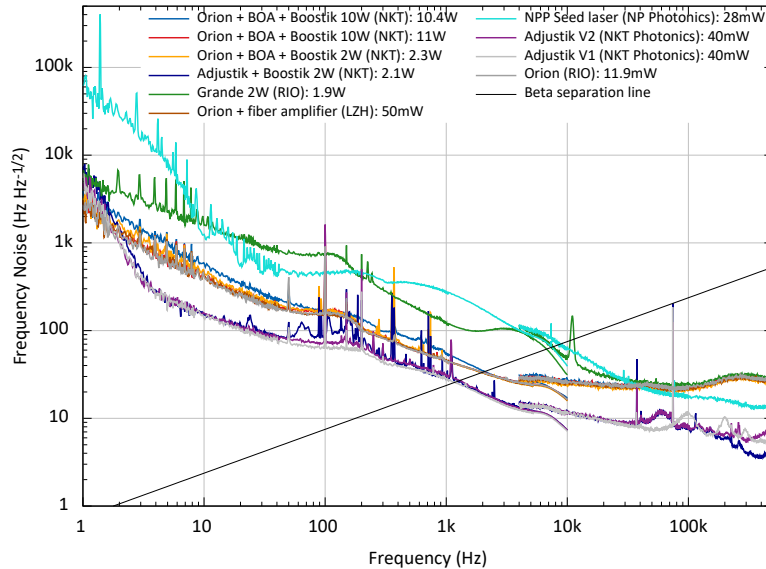


Fig. 2. The free-running frequency noise of the different seed lasers and MOPA combinations. The frequency noise of the MOPA systems is dominated by their seed laser noise.

The samples with different spans are plotted with a small overlap to compensate for calibration uncertainties and different sensor whitening of different frequency spans.

To give an approximation of the resulting linewidth of the tested lasers the  $\beta$ -separation line is also included to Fig. 2. The Fourier frequency of the crossing between this line and the noise spectral density give the approximated linewidth of the corresponding laser [35]. The lowest frequency noise is measured for the Adjustik lasers, followed by the Orion laser source. Both have a frequency noise comparable to the noise of the seed laser used in current GWD PSLs [20]. The noise of the 1064 nm seed lasers used in current GWDs, which are non-planar ring oscillator lasers can be approximated as  $10 \text{ kHz Hz}^{-1/2} \cdot 1 \text{ Hz}/f$ .

The relative power noise (RPN) of the seed lasers are shown in Fig. 3 as an amplitude spectral density. The RPN of the Orion have a different spectral shape compared to fiber lasers. The noise of the Orion laser follows roughly a  $f^{-1/2}$  slope down to the detection shot noise of  $1 \times 10^{-8} \text{ Hz}^{-1/2}$ . This low noise was achieved by replacing the supplied external 5 V switching power supply by a linearly stabilized supply with lower noise coupling to the laser. The RPN of the fiber lasers are to our understanding limited by the RPN of the used pump diodes, excess noise due to the re-absorption by the erbium ions and the relaxation oscillation [36,37] within the laser resonator at 500 kHz for the Adjustik laser and at 1 MHz for the NPP seed laser. The peak at 10 MHz in the measurements is due to a timing signal for our data acquisition system. The measurement of the Orion laser is influenced by dark noise above 30 MHz due to low available laser power.

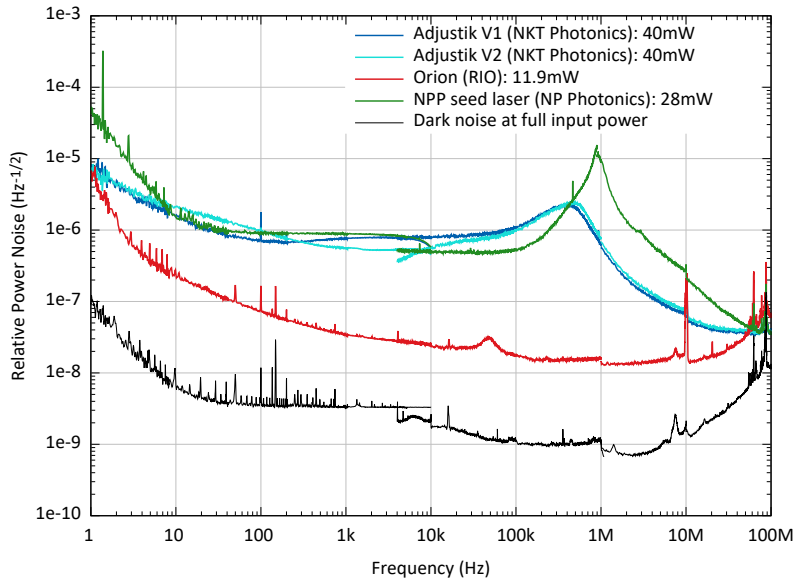


Fig. 3. The free-running RPN of the seed lasers, plotted as amplitude spectral density, follow two characteristic shapes. The Orion laser has a very low free-running noise, the fiber lasers have a higher noise floor and a characteristic relaxation oscillation peak.

The response and power cross-coupling of the frequency actuation inputs of the seed lasers are compared in Fig. 4 and Fig. 5. The frequency of the fiber laser was tuned with a piezo electric element [38], which has characteristic resonances above 40 kHz and shows only a significant coupling from the frequency modulation to the output power of the laser at Fourier frequencies around 70 kHz. The resonances limit the usable bandwidth of this actuator in feedback controls for a frequency stabilization.

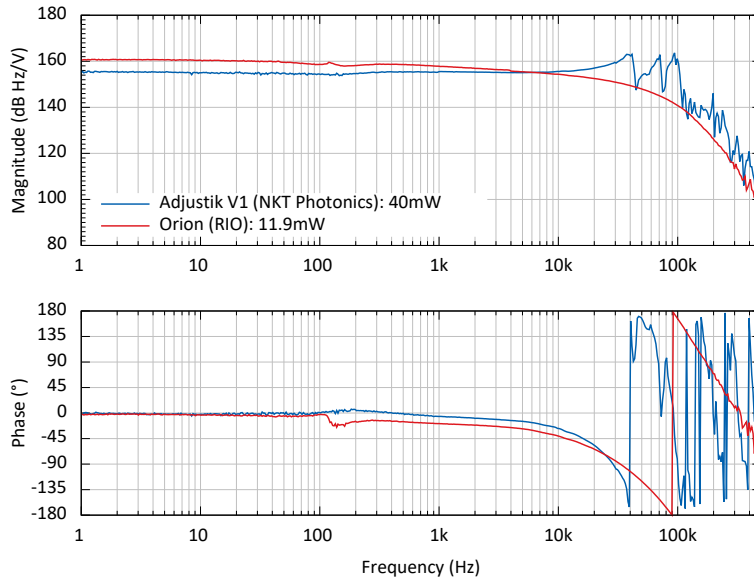


Fig. 4. The frequency actuation transfer functions of the fiber based and Orion laser show a similar magnitude at low frequencies. Resonances in the fiber laser's transfer function reduce the usable actuation bandwidth significantly compared to the Orion laser.

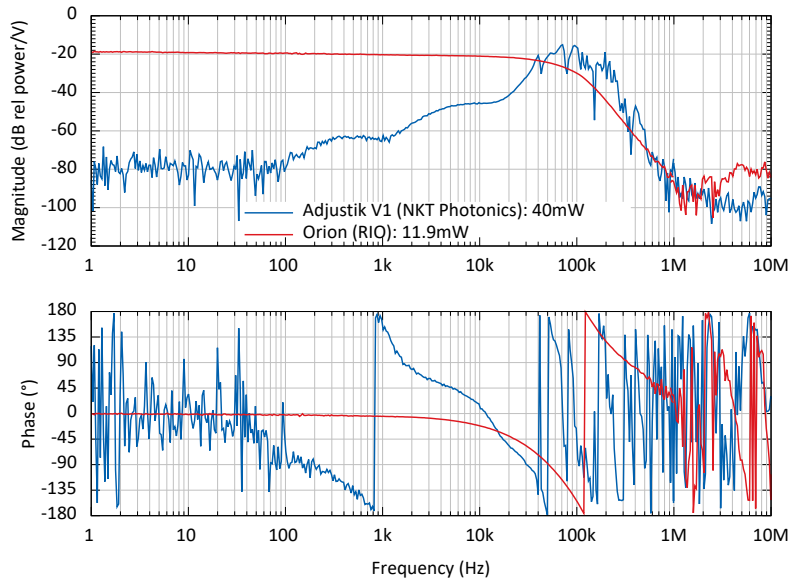


Fig. 5. The cross-couplings from frequency actuation to the output power of the Orion laser and fiber laser. As the pump current for the Orion laser also defines the output power, a direct coupling is observed. Meanwhile the output power of the fiber laser shows a strong coupling only around 70 kHz.

The frequency of the Orion laser is controlled by the pump current for the semiconductor,

which introduces a carrier density dependent index of refraction change. Hence, no mechanic resonances are present in the transfer function but a direct coupling to the optical gain and by that to the output power can be observed. The transfer function decays with multiple poles, which can be easily compensated in a feedback control. This makes the delay equivalent phase loss in the transfer function to the ultimate limit of the control bandwidth for a stabilization.

A slow, high range tuning of the frequency is possible for both lasers by a temperature control of the laser resonator.

The RPN of the pre-amplifiers was tested with the Orion laser as seed laser, as it has the lowest RPN. For the fiber pre-amplifier as well as for the BOA from Thorlabs, we used exactly the same low noise current driver with a relative current noise of  $3 \times 10^{-9} \text{ Hz}^{-1/2}$  above 100 Hz (see Fig. 6).

The higher RPN of the fiber pre-amplifier in comparison to the BOA is maybe caused by reabsorption of the seed in the quasi three laser level system of erbium or amplified spontaneous emission [39, p. 68f, 543ff]. In addition we measured the RPN of the pump diodes for the fiber pre-amplifier to be at the same level as its output power noise. Performed tests with stabilized pump power show no improved the output RPN by more than a factor of two at frequencies below 10 kHz.

Fig. 6 shows the difference between BOA and fiber pre-amplifier systems. The active fiber based system has a noise floor close to  $1 \times 10^{-6} \text{ Hz}^{-1/2}$  for low frequencies. At a corner frequency of about 10 kHz the RPN decrease, which is due to the reduced response of the fiber amplifier to power noise of its pump source (see Fig 7).

In comparison, the noise of the BOA decreases roughly with a  $f^{-1/2}$  slope. Measurements at the maximal output power of 117 mW and at 40 mW, which is the pre-amplifier's output power used to seed the subsequent power amplifier, were taken with the BOA.

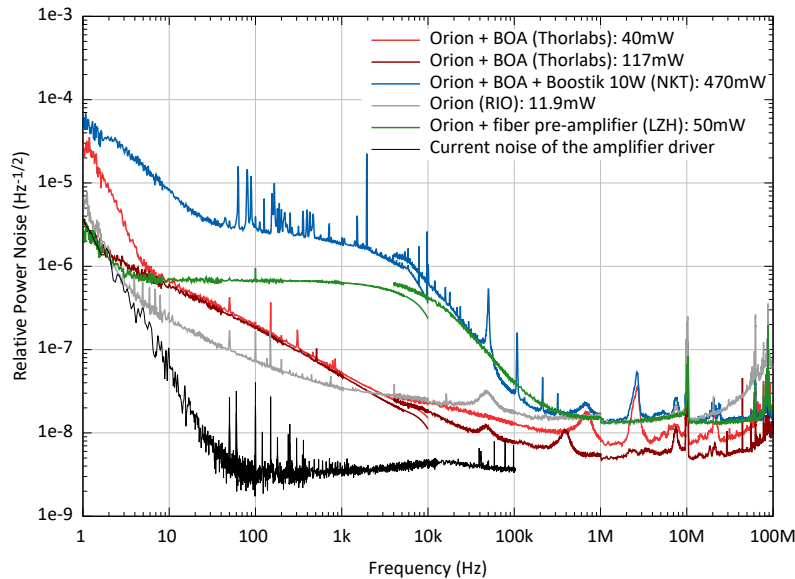


Fig. 6. The free-running RPN at the output of the pre-amplifiers is shown. For all measurements the Orion laser is used as the seed source (grey curve).

The relative current noise of the current supply for these two amplifiers was added to Fig. 6 as the black curve. The current noise is clearly below the power noise of both amplifiers and thereby does not limit their noise performance, assuming a linear coupling mechanism.



The Boostik 10 W amplifier from NKT consists out of a pre-amplifier and a power amplifier. The pre-amplifier was tested with unpumped power amplifier. Its noise shows several sharp peaks, that might be caused by internal electronics. The noise level could as well be increased due to the transmission through the unpumped active fiber, where reabsorption could happen.

The shot noise limits for the amplifier measurements shown in Fig. 6 were between  $4 \times 10^{-9} \text{ Hz}^{-1/2}$  and  $6 \times 10^{-9} \text{ Hz}^{-1/2}$  and in the case of the Orion seed laser (grey curve) at  $1 \times 10^{-8} \text{ Hz}^{-1/2}$ , as only a lower optical power was available on the power sensor in the DBB.

In Fig. 7 the transfer functions from pump current to output power are given. The transfer functions are calibrated as relative power modulation per input voltage. This transfer function typically form a low-pass, where the corner frequency  $f_{eff}$  defines how fast the population of the upper laser level can adapt the change in pump power [40]. The corner frequency of the fiber pre-amplifier is determined by a fit to  $f_{eff} = 6.7 \text{ kHz}$ . In contrast the BOA's transfer function is limited by the speed of its current driver. The typical lifetimes of these types of amplifiers are in the range of nano seconds corresponding to a corner frequency above 100 MHz [41, p. 469].

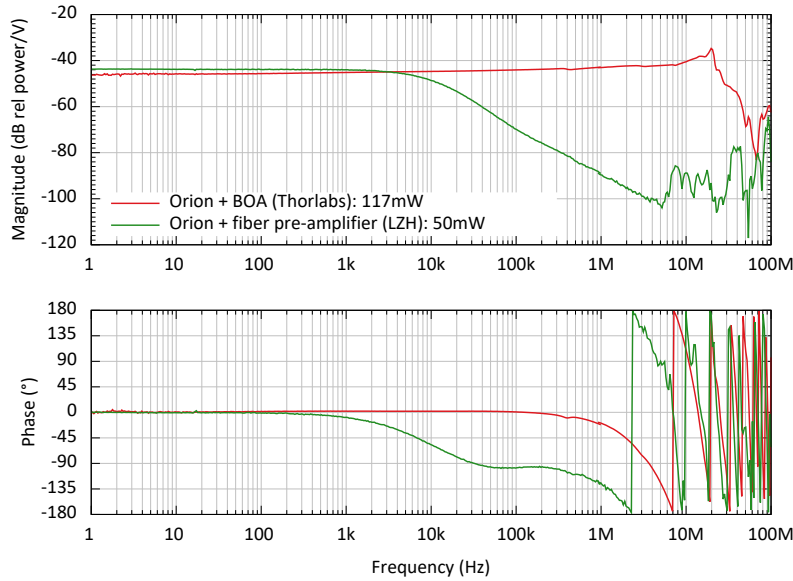


Fig. 7. The pump current of the BOA and fiber pre-amplifier's pump diodes is modulated to measure the transfer function to the pre-amplifier's output power.

The response of the fiber pre-amplifier to seed power modulation (see Fig. 8) is suppressed at low frequencies with the amplifier gain, due to the seed power saturation of the amplifiers. Above the corner frequency  $f_{eff}$  the seed power modulation is amplified by the full power gain of the amplifiers [40]. The seed power modulation sent to the BOA is suppressed in the whole bandwidth of the seed power modulator, due to the high corner frequency corresponding to this amplifier.

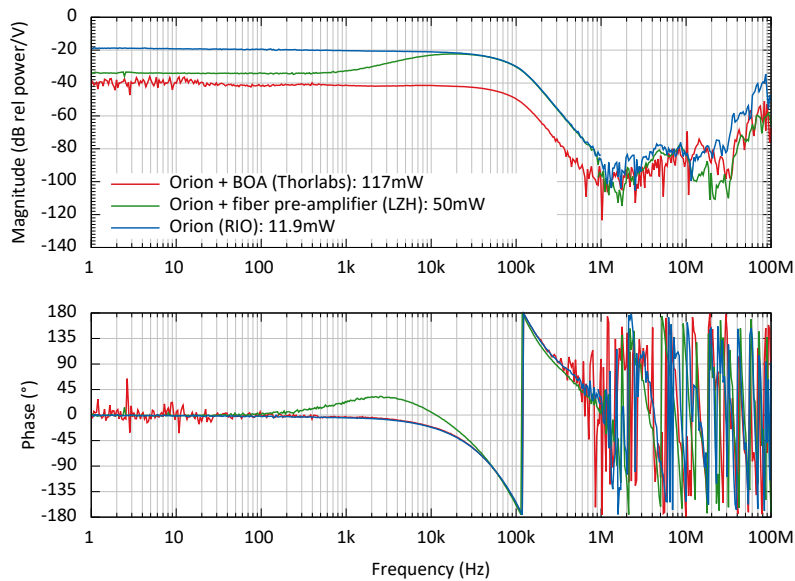


Fig. 8. The seed power is modulated to measure the transfer function to the output power of the pre-amplifiers. The seed power modulation (blue curve) is transferred to the output of the pre-amplifiers (green and red curves).

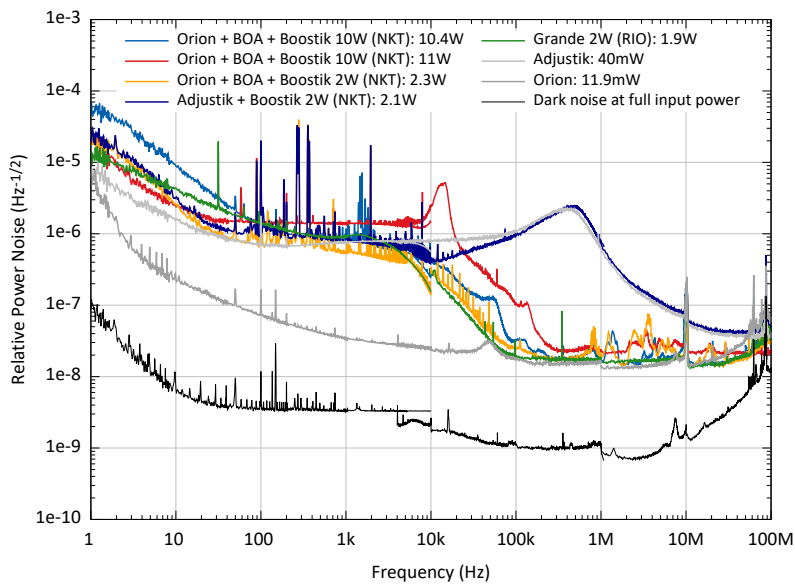


Fig. 9. The free-running RPN spectral densities at the output of the power amplifiers. At low frequencies the power noise of the amplifiers is dominated by their pump power noise.

The RPN of the all-fiber power amplifiers is plotted in Fig. 9. The typical flat noise for frequencies up to 10 kHz, which was discussed for the pre-amplifiers, is again clearly visible. Above 10 kHz the power noise differs with the used seed laser source.

We measured slightly different RPN levels for the two nominal similar 10 W power level amplifiers, which might be caused by different noise levels of internal current drivers for the pump diodes.

The narrow peaks in the RPN measurements of the amplifier can be caused by internal electronics in the amplifier modules, like temperature controllers or digital controls.

The transfer functions in Fig. 10 show how the output power of the power amplifiers can be controlled by controlling their seed laser power. The Grande MOPA laser does not allow to change the power of its integrated seed separately from its frequency. We show the response of its analog power control for comparison. This input allows to change the pump current with a bandwidth of less than 10 Hz.

The other power amplifiers provide only a slow digital control of their output power. Fast output power control is only possible via control of the seed or pre-amplifier power. Due to the seed power saturation of the power amplifiers, they show a reduced response to power modulations of the seed below the corner frequency  $f_{eff}$  of the coupling transfer function. This makes it difficult to use only the pre-amplifier seed beam to stabilize the output power of such an amplifier.

The relaxation oscillation frequency of the fiber seed laser is at or above the corner frequency of this transfer function such that its size in a relative power noise spectral density is not attenuated as can be seen in the power amplifier's output noise in Fig. 9.

The frequency modulation transfer functions from the pre-amplifier to the power amplifiers are up to small delay driven phase losses given by the seed transfer function Fig. 4. The delay is caused by the propagation time through the optical fibers of the amplifiers.

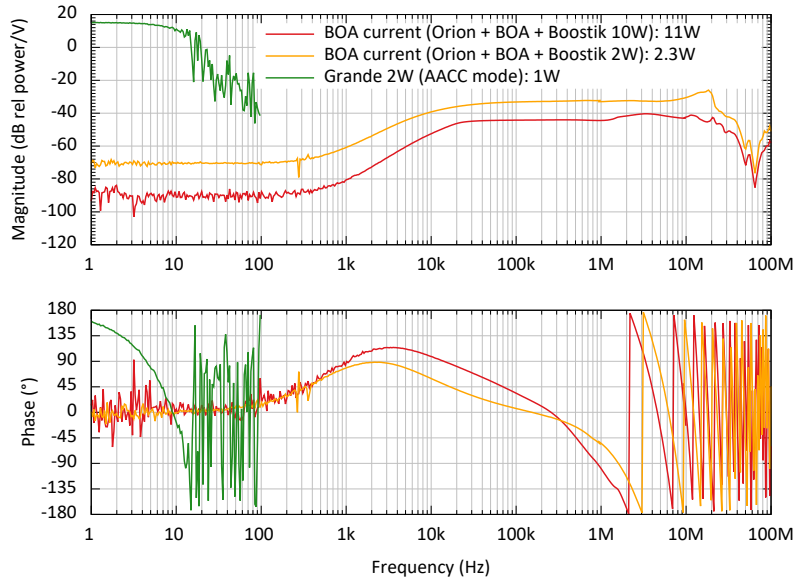


Fig. 10. The transfer functions from seed power modulations to power modulations of the power amplifier output power have the same shapes as the measurements with the fiber pre-amplifiers in Fig. 7.

#### 4. Stabilization

To demonstrate the capabilities of the actuators and sensors for a stabilized laser system, the Orion laser with the BOA was stabilized. This combination was chosen due to its low noise and the available actuation capabilities. We did not include any power amplifier in our stabilization setup as they are not expected to influence the frequency noise and as the currently available

models do not provide appropriated power actuators.

The frequency stabilization is realized by acting on the ECDL's pump current and on the fiber phase actuator, which results in the open loop transfer function in Fig. 11. The open loop transfer function was calculated from a disturbance reduction transfer function measurement, which describes how an external noise source appears in the closed loop.

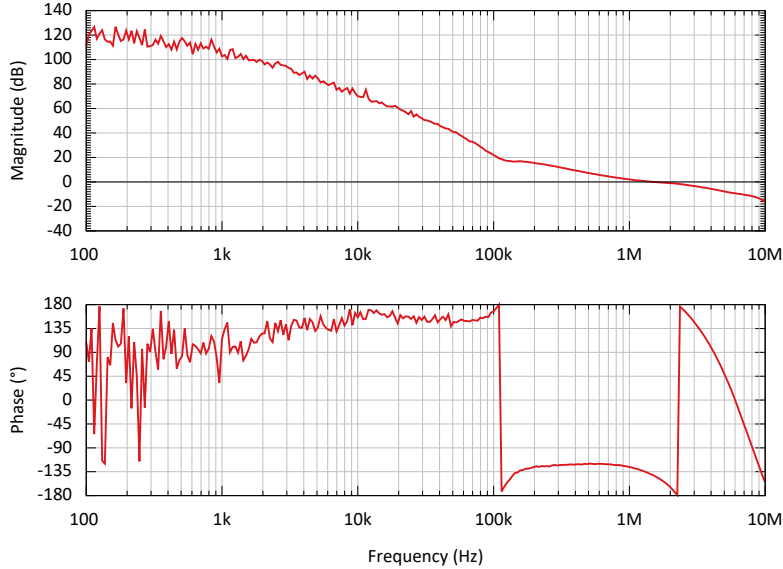


Fig. 11. The open loop transfer function of the frequency stabilization to the resonance frequency of the reference cavity is shown. A unity gain bandwidth of 1.3 MHz was achieved by utilizing a cross-over between seed laser and fiber phase modulator at 100 kHz.

Below 100 kHz the pump current of the seed laser was used to control the laser frequency to be on resonance to the reference cavity. At frequencies above 100 kHz the fiber phase modulator was the dominating actuator for the stabilization. With this combination we achieved a control bandwidth of 1.3 MHz. An applied voltage to the phase actuator leads to a frequency actuation of  $0.5 \text{ Hz V}^{-1} \cdot f/1 \text{ Hz}$ . In comparison the frequency actuation of the laser has a gain of  $100 \text{ MHz V}^{-1}$  (see Fig. 4). The measured open-loop gain shown in Fig. 11 is limited at low frequencies by the dynamic range of the network analyser. A nested loop stabilization including an additional boost stage would allow for even higher loop gains below 1 kHz.

The bandwidth of this stabilization is limited by the required low-pass in the demodulation electronics of the PDH sensing and the electronic delays.

The control signal and the error signal is captured to compute the amplitude spectral density of the frequency noise. The calibration of the control signals was derived by the actuator transfer functions measured with the DBB as frequency sensor. The error signal calibration was derived from the plant transfer function of the frequency stabilization, calculated from the measured noise suppression transfer function and the transfer function of the feedback controller.

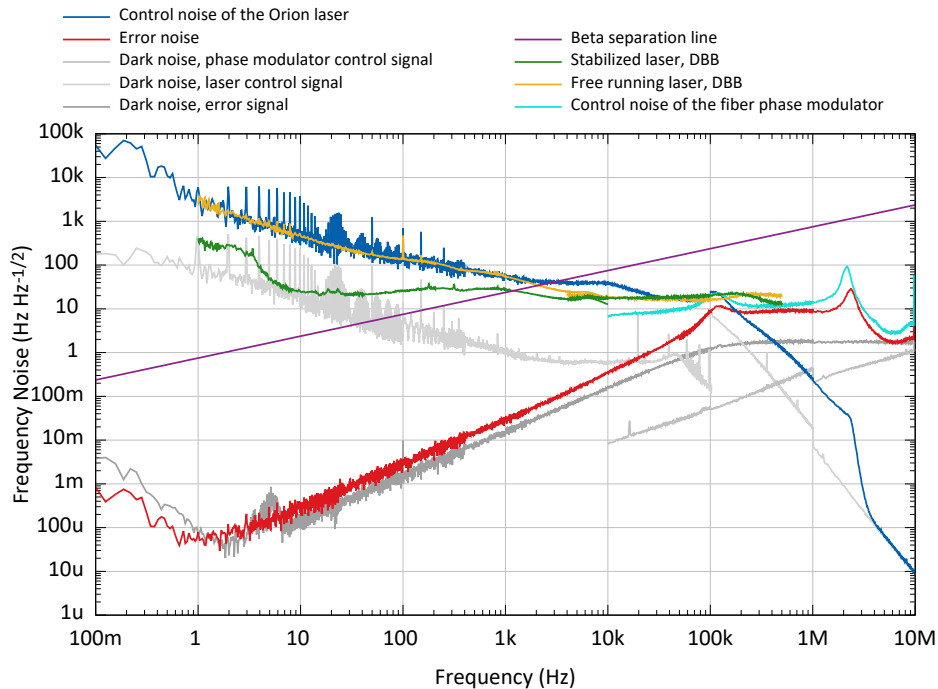


Fig. 12. The calibrated control signal noise (blue) and the calibrated error signal noise (red) are plotted for the frequency stabilization.

For the stabilized frequency noise measurements (Fig. 12) the power stabilization was in operation (see below). No cross-couplings from the operating power stabilization to frequency noise were found.

The control signal sent to the laser frequency actuator and for the phase actuator with the closed frequency control loop is consistent with the free-running frequency noise measured with the DBB. Only peaks at 1.95 Hz and harmonics were present due to ground loop coupling to the modulator input of the Orion laser. This is an increase in noise in comparison to the free-running laser frequency noise. In addition a servo bump at 2 MHz is visible. The ground loop coupling is totally suppressed by the high loop gain and is not visible in the error signal noise. At frequencies above 100 kHz, where the phase actuator is used for frequency control, an electronic cross-coupling of the control signal to the error signal is visible (see similarity of light blue and red curve in Fig. 12). This is due to a common printed circuit board for error signal demodulation and fiber phase modulator control.

The  $\beta$ -separation line [35] is added in Fig. 12 to derive an estimation of the linewidth of the stabilized laser. From this measurement no statement on the linewidth can be made, as this in-loop measurement doesn't cross the  $\beta$ -separation line.

The frequency noise of the stabilized system was also measured with the DBB and is given in Fig. 12. This measurement was in the whole frequency band most likely limited by the length noise of the low finesse, piezo driven aluminium spacer cavity that serves as frequency reference for the DBB measurements.

The power stabilization of the laser system used the pump current of the BOA as an actuator. As an in-loop sensor a low noise photodiode was implemented.

The open loop transfer function is designed for a low noise performance in the full gravitational wave frequency band (see Fig. 13). A control bandwidth of 70 kHz with good phase and gain margin for best noise performance and high robustness was chosen. The bandwidth was limited

by the used analog controller and the chosen photodiode electronics. The residual in-loop error noise was below 10 kHz, more than one order of magnitude below the detection shot noise.

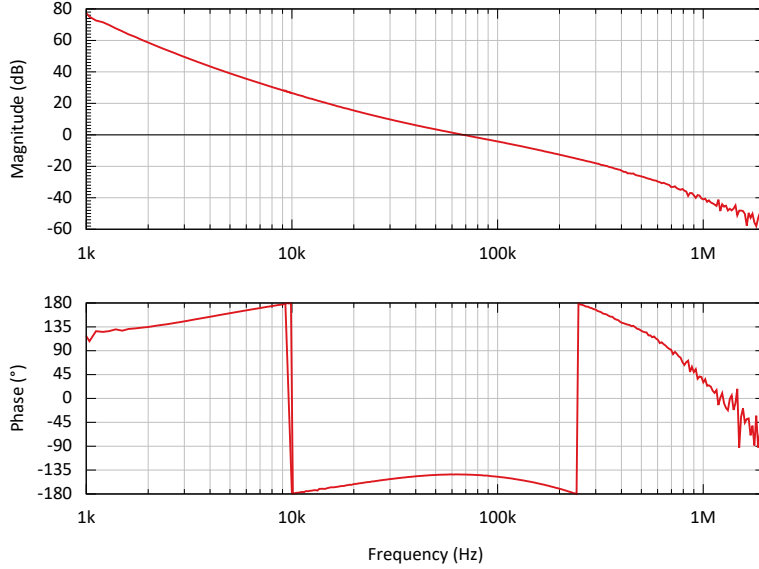


Fig. 13. The open loop transfer function of the power stabilization is designed to operate with a bandwidth of 70 kHz for best noise performance and high robustness.

The power noise measurement photodiode inside the DBB was used as an out-of-loop sensor with 16.3 mW detected power. The noise spectra are taken in different operation states of the laser systems, see Fig. 14. At low frequencies the power noise measurements with enabled power stabilization were influenced by non-stationary contributions from scattered light and air turbulences. These noise sources couple as sensor noise into the in-loop and out-of-loop sensors. The difference between the measurements with running power stabilisation below 100 Hz is caused by the non-stationary noise contributions, which show up by strong differences of the single traces in the averaged measurements. There was no systematic difference observed, between the noise at these low frequencies with and without enabled frequency stabilization, while operating the power stabilization.

Between 1 kHz and 30 kHz the uncorrelated sum of the in-loop detector shot noise and the out-of-loop detector shot noise was the limit of the stabilization. At 100 kHz the servo bump of the stabilization is present and at 300 kHz a noise bump of the current driver of the amplifier is visible. At higher frequencies the measurement was limited by the shot noise of the out-of-loop detector and peaks of the timing signal for the data acquisition and at the modulation frequency. The noise floor above 1 kHz was confirmed with measurements using an independent photodiode outside of the DBB as an other out-of-loop detector.

With an enabled frequency stabilization the free-running RPN increases between 1 kHz and 200 kHz (see Fig. 14). This is due to the residual amplitude modulation (RAM) of the fiber phase modulator. The conversion from phase actuation to laser frequency  $\Delta f_L = \Delta\phi \cdot f$  leads to an increased phase actuation  $\Delta\phi$  necessary for lower Fourier frequencies  $f$ . This resulted in the higher RAM in the range of the cross-over frequency. At these frequencies higher modulation amplitudes are expected for both actuators which implies an increase RAM injection into the power stabilization loop.

To lower the RAM a bias voltage of  $-5.5$  V was applied to the fiber phase modulator. In our

experiment a fiber polarisation splitter is placed behind the modulator to locate the conversion of the polarisation modulation to the RAM to one place in the setup and avoid a similar coupling at polarizing components in the following beam path. The RAM of the seed beam was further lowered in the amplifier by 20 dB at low frequencies according to the amplifier transfer function (see Fig. 8).

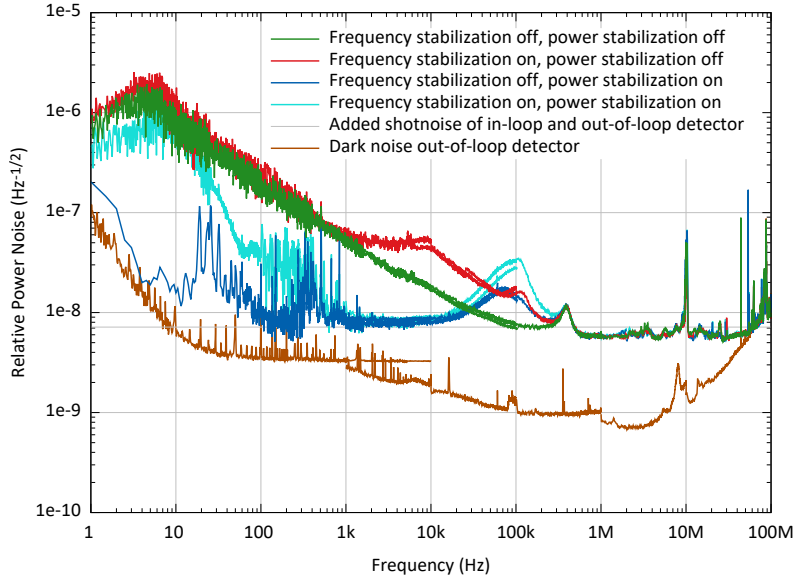


Fig. 14. The RPN as an amplitude spectral density was measured for several combinations of on/off states of the frequency and power stabilization control loops. A cross-coupling between frequency stabilization to power noise is visible.

When the power stabilization was enabled in addition to the frequency stabilization the excess power noise between 2 kHz and 20 kHz due to RAM could be suppressed. The servo bump around 100 kHz was, however, increased.

With such a high loop gain the out-of-loop performance in the gravitational wave frequency range is only limited by the in-loop sensor noise which can be improved by better shielding and by detecting more power.

## 5. Conclusion

Currently designed future ground-based GWDs operating at a wavelength of 1550 nm demand single mode, single frequency laser systems [42] with extremely low noise performance. In this paper we presented detailed measurements of the free-running noise and actuator transfer functions of a variety of seed lasers, pre-amplifier and power amplifier as optional subcomponents for such laser systems.

Our measurements give an independent characterization and an extension to vendor data sheets to support the trade-off between different lasers for future GWDs or other applications with low noise requirements.

The frequency noise of the tested amplifier systems are determined by the seed laser's frequency noise. Also the frequency modulation transfer function from the seed to the amplifier output depends primarily on the seed laser's frequency actuators, up to a delay due to additional propagation time through the amplifiers.

The power noise of all analysed MOPA combinations at frequencies below 10 kHz is dominated

by the high power stages, while at higher frequencies the power noise of one of the seed lasers starts to dominate (see Fig. 9).

In section 4 the performance of a stabilized laser system is discussed. We demonstrated the high bandwidth and high noise suppression of a frequency stabilization with respect to a high finesse optical reference cavity. Simultaneously we operate a power stabilization and show a high loop gain in the detection band of ground-based GWDs. The performance was limited by non-stationary below 100 Hz, which has to be further lowered.

The final laser system can benefit from an optical mode cleaning resonator by stray light shielding and passive noise filtering above its pole frequency. This also would help to reduce the non-stationary RPN observed below 100 Hz. In addition the spatial mode filtering and pointing suppression of an optical mode cleaning resonator may get more relevant for higher output powers of a final laser system.

Due to the unavailability of an appropriate power actuator for the commercial high power amplifiers the light power in our stabilization experiment was limited to the output power of the pre-amplifiers to 115 mW. To use the high power stages in future PSL systems either appropriate power modulation inputs need to be added to the high power amplifiers, which was demonstrated in [43] for solid state amplifiers, or external modulators must be implemented.

To integrate the laser system to the stabilizations of a GWD, the use of nested control loops and multi-sensor feedback control can be applied. This combines the fast local feedback stabilizations of the PSL with the high precision sensors for power and laser frequency in the main vacuum system of a GWD [33].

To reach higher power levels at 1550 nm wavelength, as demanded for some future GWDs, additional fiber amplifiers can be used, as demonstrated in [44].

**Funding.** This work was supported by Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) under Germany's Excellence Strategy – EXC-2123 Quantum Frontiers – 390837967.

**Disclosures.** The authors declare no conflicts of interest.

## References

1. LIGO Scientific Collaboration and Virgo Collaboration, "Observation of Gravitational Waves from a Binary Black Hole Merger," *Phys. Rev. Lett.* **116** (2016).
2. LIGO Scientific Collaboration and Virgo Collaboration, "Multi-messenger observations of a binary neutron star merger," *The Astrophys. J.* **848**, L12 (2017).
3. LIGO Scientific Collaboration and Virgo Collaboration, "GWTC-1: A gravitational-wave transient catalog of compact binary mergers observed by ligo and virgo during the first and second observing runs," *Phys. Rev. X* **9**, 031040 (2019).
4. LIGO Scientific Collaboration and Virgo Collaboration, "GWTC-2: Compact binary coalescences observed by ligo and virgo during the first half of the third observing run," (2020).
5. A. Buikema, C. Cahillane, G. L. Mansell, C. D. Blair, R. Abbott, C. Adams, R. X. Adhikari, A. Ananyeva, S. Appert, K. Arai, J. S. Areeda, Y. Asali, S. M. Aston, C. Austin, A. M. Baer, M. Ball, S. W. Ballmer, S. Banagiri, D. Barker, L. Barsotti, J. Bartlett, B. K. Berger, J. Betzwieser, D. Bhattacharjee, G. Billingsley, S. Biscans, R. M. Blair, N. Bode, P. Booker, R. Bork, A. Bramley, A. F. Brooks, D. D. Brown, K. C. Cannon, X. Chen, A. A. Ciobanu, F. Clara, S. J. Cooper, K. R. Corley, S. T. Countryman, P. B. Covas, D. C. Coyne, L. E. H. Datrier, D. Davis, C. Di Fronzo, K. L. Dooley, J. C. Driggers, P. Dupej, S. E. Dwyer, A. Effler, T. Etzel, M. Evans, T. M. Evans, J. Feicht, A. Fernandez-Galiana, P. Fritschel, V. V. Frolov, P. Fulda, M. Fyffe, J. A. Giaime, K. D. Giardina, P. Godwin, E. Goetz, S. Gras, C. Gray, R. Gray, A. C. Green, E. K. Gustafson, R. Gustafson, J. Hanks, J. Hanson, T. Hardwick, R. K. Hasskew, M. C. Heintze, A. F. Helmling-Cornell, N. A. Holland, J. D. Jones, S. Kandhasamy, S. Karki, M. Kasprzack, K. Kawabe, N. Kijbunchoo, P. J. King, J. S. Kissel, R. Kumar, M. Landry, B. B. Lane, B. Lantz, M. Laxen, Y. K. Lecoecuche, J. Leviton, J. Liu, M. Lormand, A. P. Lundgren, R. Macas, M. MacInnis, D. M. Macleod, S. Márka, Z. Márka, D. V. Martynov, K. Mason, T. J. Massinger, F. Matichard, N. Mavalvala, R. McCarthy, D. E. McClelland, S. McCormick, L. McCuller, J. McIver, T. McRae, G. Mendell, K. Merfeld, E. L. Merilh, F. Meylahn, T. Mistry, R. Mittleman, G. Moreno, C. M. Mow-Lowry, S. Mozzon, A. Mullavey, T. J. N. Nelson, P. Nguyen, L. K. Nuttall, J. Oberling, R. J. Oram, B. O'Reilly, C. Osthelder, D. J. Ottaway, H. Overmier, J. R. Palamos, W. Parker, E. Payne, A. Pele, R. Penhorwood, C. J. Perez, M. Pirello, H. Radkins, K. E. Ramirez, J. W. Richardson, K. Riles, N. A. Robertson, J. G. Rollins, C. L. Romel, J. H. Romie, M. P. Ross, K. Ryan, T. Sadecki, E. J. Sanchez, L. E. Sanchez, T. R. Saravanan, R. L. Savage, D. Schaetzl, R. Schnabel, R. M. S. Schofield, E. Schwartz, D. Sellers, T. Shaffer,



- D. Sigg, B. J. J. Slagmolen, J. R. Smith, S. Soni, B. Sorazu, A. P. Spencer, K. A. Strain, L. Sun, M. J. Szczepańczyk, M. Thomas, P. Thomas, K. A. Thorne, K. Toland, C. I. Torrie, G. Traylor, M. Tse, A. L. Urban, G. Vajente, G. Valdes, D. C. Vander-Hyde, P. J. Veitch, K. Venkateswara, G. Venugopalan, A. D. Viets, T. Vo, C. Vorvick, M. Wade, R. L. Ward, J. Warner, B. Weaver, R. Weiss, C. Whittle, B. Willke, C. C. Wipf, L. Xiao, H. Yamamoto, H. Yu, H. Yu, L. Zhang, M. E. Zucker, and J. Zweizig, “Sensitivity and performance of the advanced ligo detectors in the third observing run,” *Phys. Rev. D* **102**, 062003 (2020).
6. F. Acernese, M. Agathos, K. Agatsuma, D. Aisa, N. Allemandou, A. Allocca, J. Amarni, P. Astone, G. Balestri, G. Ballardin, F. Barone, J.-P. Baronick, M. Barsuglia, A. Basti, F. Basti, T. S. Bauer, V. Bavigadda, M. Bejger, M. G. Beker, C. Belczynski, D. Bersanetti, A. Bertolini, M. Bitossi, M. A. Bizouard, S. Bloemen, M. Blom, M. Boer, G. Bogaert, D. Bondi, F. Bondu, L. Bonelli, R. Bonnand, V. Boschi, L. Bosi, T. Bouedo, C. Bradaschia, M. Branchesi, T. Briant, A. Brillet, V. Brisson, T. Bulik, H. J. Bulten, D. Buskulic, C. Buy, G. Cagnoli, E. Calloni, C. Campeggi, B. Canuel, F. Carbognani, F. Cavalier, R. Cavalieri, G. Cella, E. Cesarini, E. Chassande-Mottin, A. Chincarini, A. Chiummo, S. Chua, F. Cleva, E. Coccia, P.-F. Cohadon, A. Colla, M. Colombini, A. Conte, J.-P. Coulon, E. Cuoco, A. Dalmaz, S. D’Antonio, V. Dattilo, M. Davier, R. Day, G. Debreczeni, J. Degallaix, S. Deléglise, W. D. Pozzo, H. Dereli, R. D. Rosa, L. D. Fiore, A. D. Lieto, A. D. Virgilio, M. Doets, V. Dolique, M. Drago, M. Ducrot, G. Endrőczy, V. Fafone, S. Farinon, I. Ferrante, F. Ferrini, F. Fidecaro, I. Fiori, R. Flaminio, J.-D. Fournier, S. Franco, S. Frasca, F. Frasconi, L. Gammaitoni, F. Garufi, M. Gaspard, A. Gatto, G. Gemme, B. Gendre, E. Genin, A. Gennai, S. Ghosh, L. Giacobone, A. Giazotto, R. Gouaty, M. Granata, G. Greco, P. Groot, G. M. Guidi, J. Harms, A. Heidmann, H. Heitmann, P. Hello, G. Hemming, E. Hennes, D. Hofman, P. Jaranowski, R. J. G. Jonker, M. Kasprzack, F. Kéfélian, I. Kowalska, M. Kraan, A. Królak, A. Kutynia, C. Lazzaro, M. Leonardi, N. Leroy, N. Letendre, T. G. F. Li, B. Lieunard, M. Lorenzini, V. Lorette, G. Losurdo, C. Magazzù, E. Majorana, I. Maksimovic, V. Malvezzi, N. Man, V. Mangano, M. Mantovani, F. Marchesoni, F. Marion, J. Marque, F. Martelli, L. Martellini, A. Masserot, D. Meacher, J. Meidam, F. Mezzani, C. Michel, L. Milano, Y. Minenkov, A. Moggi, M. Mohan, M. Montani, N. Morgado, B. Mours, F. Mul, M. F. Nagy, I. Nardecchia, L. Naticchioni, G. Nelemans, I. Neri, M. Neri, F. Nocera, E. Pacaud, C. Palomba, F. Paoletti, A. Paoli, A. Pasqualetti, R. Passaquieti, D. Passuello, M. Perciballi, S. Petit, M. Pichot, F. Piergiovanni, G. Pillant, A. Piluso, L. Pinard, R. Poggiani, M. Prijatelj, G. A. Prodi, M. Punturo, P. Puppó, D. S. Rabeling, I. Rácz, P. Rapagnani, M. Razzano, V. Re, T. Regimbau, F. Ricci, F. Robinet, A. Rocchi, L. Rolland, R. Romano, D. Rosińska, P. Ruggi, E. Saracco, B. Sassolas, F. Schimmel, D. Sentenac, V. Sequino, S. Shah, K. Siellez, N. Straniero, B. Swinkels, M. Tacca, M. Tonelli, F. Travasso, M. Turconi, G. Vajente, N. van Bakel, M. van Beuzekom, J. F. J. van den Brand, C. V. D. Broeck, M. V. van der Sluys, J. van Heijningen, M. Vasúth, G. Vedovato, J. Veitch, D. Verkindt, F. Vetrano, A. Viceré, J.-Y. Vinet, G. Visser, H. Vocca, R. Ward, M. Was, L.-W. Wei, M. Yvert, A. Z. Zny, and J.-P. Zendri, “Advanced Virgo: a second-generation interferometric gravitational wave detector,” *Class. Quantum Gravity* **32**, 024001 (2014).
  7. C. Affeldt, K. Danzmann, K. L. Dooley, H. Grote, M. Hewitson, S. Hild, J. Hough, J. Leong, H. Lück, M. Prijatelj, S. Rowan, A. Rüdiger, R. Schilling, R. Schnabel, E. Schreiber, B. Sorazu, K. A. Strain, H. Vahlbruch, B. Willke, W. Winkler, and H. Wittel, “Advanced techniques in GEO 600,” *Class. Quantum Gravity* **31**, 224002 (2014).
  8. M. Tse, H. Yu, N. Kijbunchoo, A. Fernandez-Galiana, P. Dupej, L. Barsotti, C. D. Blair, D. D. Brown, S. E. Dwyer, A. Effler, M. Evans, P. Fritschel, V. V. Frolov, A. C. Green, G. L. Mansell, F. Matichard, N. Mavalvala, D. E. McClelland, L. McCuller, T. McRae, J. Miller, A. Mullaevy, E. Oelker, I. Y. Phinney, D. Sigg, B. J. J. Slagmolen, T. Vo, R. L. Ward, C. Whittle, R. Abbott, C. Adams, R. X. Adhikari, A. Ananyeva, S. Appert, K. Arai, J. S. Areeda, Y. Asali, S. M. Aston, C. Austin, A. M. Baer, M. Ball, S. W. Ballmer, S. Banagiri, D. Barker, J. Bartlett, B. K. Berger, J. Betzwieser, D. Bhattacharjee, G. Billingsley, S. Biscans, R. M. Blair, N. Bode, P. Booker, R. Bork, A. Bramley, A. F. Brooks, A. Buikema, C. Cahillane, K. C. Cannon, X. Chen, A. A. Ciobanu, F. Clara, S. J. Cooper, K. R. Corley, S. T. Countryman, P. B. Covas, D. C. Coyne, L. E. H. Datrier, D. Davis, C. Di Fronzo, J. C. Driggers, T. Etzel, T. M. Evans, J. Feicht, P. Fulda, M. Fyffe, J. A. Giaime, K. D. Giardina, P. Godwin, E. Goetz, S. Gras, C. Gray, R. Gray, A. Gupta, E. K. Gustafson, R. Gustafson, J. Hanks, J. Hanson, T. Hardwick, R. K. Hasskew, M. C. Heintze, A. F. Helmling-Cornell, N. A. Holland, J. D. Jones, S. Kandhasamy, S. Karki, M. Kasprzack, K. Kawabe, P. J. King, J. S. Kissel, R. Kumar, M. Landry, B. B. Lane, B. Lantz, M. Laxen, Y. K. Lecoeuche, J. Leviton, J. Liu, M. Lormand, A. P. Lundgren, R. Macas, M. MacInnis, D. M. Macleod, S. Márka, Z. Márka, D. V. Martynov, K. Mason, T. J. Massinger, R. McCarthy, S. McCormick, J. McIver, G. Mendell, K. Merfeld, E. L. Merilh, F. Meylahn, T. Mistry, R. Mittleman, G. Moreno, C. M. Mow-Lowry, S. Mozzon, T. J. N. Nelson, P. Nguyen, L. K. Nuttall, J. Oberling, R. J. Oram, B. O’Reilly, C. Osthelder, D. J. Ottaway, H. Overmier, J. R. Palamos, W. Parker, E. Payne, A. Pele, C. J. Perez, M. Pirello, H. Radkins, K. E. Ramirez, J. W. Richardson, K. Riles, N. A. Robertson, J. G. Rollins, C. L. Romel, J. H. Romie, M. P. Ross, K. Ryan, T. Sadecki, E. J. Sanchez, L. E. Sanchez, T. R. Saravanan, R. L. Savage, D. Schaetzl, R. Schnabel, R. M. S. Schofield, E. Schwartz, D. Sellers, T. J. Shaffer, J. R. Smith, S. Soni, B. Sorazu, A. P. Spencer, K. A. Strain, L. Sun, M. J. Szczepańczyk, M. Thomas, K. A. Thorne, K. Toland, C. I. Torrie, G. Traylor, A. L. Urban, G. Vajente, G. Valdes, D. C. Vander-Hyde, P. J. Veitch, K. Venkateswara, G. Venugopalan, A. D. Viets, C. Vorvick, M. Wade, J. Warner, B. Weaver, R. Weiss, B. Willke, C. C. Wipf, L. Xiao, H. Yamamoto, M. J. Yap, H. Yu, L. Zhang, M. E. Zucker, and J. Zweizig, “Quantum-enhanced advanced ligo detectors in the era of gravitational-wave astronomy,” *Phys. Rev. Lett.* **123**, 231107 (2019).
  9. Virgo Collaboration, “Increasing the astrophysical reach of the advanced virgo detector via the application of squeezed vacuum states of light,” *Phys. Rev. Lett.* **123**, 231108 (2019).
  10. G. M. Harry, A. M. Gretarsson, P. R. Saulson, S. E. Kittelberger, S. D. Penn, W. J. Startin, S. Rowan, M. M. Fejer,

- D. R. M. Crooks, G. Cagnoli, J. Hough, and N. Nakagawa, “Thermal noise in interferometric gravitational wave detectors due to dielectric optical coatings,” *Class. Quantum Gravity* **19**, 897–917 (2002).
11. T. Uchiyama, K. Kuroda, M. Ohashi, S. Miyoki, H. Ishitsuka, K. Yamamoto, H. Hayakawa, K. Kasahara, M.-K. Fujimoto, S. Kawamura, R. Takahashi, T. Yamazaki, K. Arai, D. Tatsumi, A. Ueda, M. Fukushima, S. Sato, Y. Tsunesada, Z.-H. Zhu, T. Shintomi, A. Yamamoto, T. Suzuki, Y. Saito, T. Haruyama, N. Sato, Y. Higashi, T. Tomaru, K. Tsubono, M. Ando, K. Numata, Y. Aso, K.-I. Ueda, H. Yoneda, K. Nakagawa, M. Musha, N. Mio, S. Moriwaki, K. Somiya, A. Araya, A. Takamori, N. Kanda, S. Telada, H. Tagoshi, T. Nakamura, M. Sasaki, T. Tanaka, K.-I. Ohara, H. Takahashi, S. Nagano, O. Miyakawa, and M. E. Tobar, “Present status of large-scale cryogenic gravitational wave telescope,” *Class. Quantum Gravity* **21**, S1161–S1172 (2004).
  12. R. X. Adhikari, K. Arai, A. F. Brooks, C. Wipf, O. Aguiar, P. Altin, B. Barr, L. Barsotti, R. Bassiri, A. Bell, G. Billingsley, R. Birney, D. Blair, E. Bonilla, J. Briggs, D. D. Brown, R. Byer, H. Cao, M. Constanancio, S. Cooper, T. Corbitt, D. Coyne, A. Cumming, E. Daw, R. deRosa, G. Eddolls, J. Eichholz, M. Evans, M. Fejer, E. C. Ferreira, A. Freise, V. V. Frolov, S. Gras, A. Green, H. Grote, E. Gustafson, E. D. Hall, G. Hammond, J. Harms, G. Harry, K. Haughian, D. Heinert, M. Heintze, F. Hellman, J. Hennig, M. Hennig, S. Hild, J. Hough, W. Johnson, B. Kamai, D. Kapasi, K. Komori, D. Koptsov, M. Korobko, W. Z. Korth, K. Kuns, B. Lantz, S. Leavey, F. Magana-Sandoval, G. Mansell, A. Markosyan, A. Markowitz, I. Martin, R. Martin, D. Martynov, D. E. McClelland, G. McGhee, T. McRae, J. Mills, V. Mitrofanov, M. Molina-Ruiz, C. Mow-Lowry, J. Munch, P. Murray, S. Ng, M. A. Okada, D. J. Ottaway, L. Prokhorov, V. Quetschke, S. Reid, D. Reitze, J. Richardson, R. Robie, I. Romero-Shaw, R. Route, S. Rowan, R. Schnabel, M. Schneewind, F. Seifert, D. Shaddock, B. Shapiro, D. Shoemaker, A. S. Silva, B. Slagmolen, J. Smith, N. Smith, J. Steinlechner, K. Strain, D. Taira, S. Tait, D. Tanner, Z. Tornasi, C. Torrie, M. V. Veggel, J. Vanheijningen, P. Veitch, A. Wade, G. Wallace, R. Ward, R. Weiss, P. Wessels, B. Willke, H. Yamamoto, M. J. Yap, and C. Zhao, “A cryogenic silicon interferometer for gravitational-wave detection,” *Class. Quantum Gravity* **37**, 165003 (2020).
  13. ET steering committee, “Design report Update 2020 for the Einstein Telescope,” Tech. rep., Einstein gravitational wave Telescope (2020).
  14. LIGO Scientific Collaboration and Virgo Collaboration, “Exploring the sensitivity of next generation gravitational wave detectors,” *Class. Quantum Gravity* **34**, 044001 (2017).
  15. LIGO Scientific Collaboration, “Instrument science white paper 2019,” Tech. rep., LIGO (2019).
  16. V. Dolgovskiy, S. Schilt, N. Bucalovic, G. D. Domenico, S. Grop, B. Dubois, V. Giordano, and T. Südmeyer, “Ultra-stable microwave generation with a diode-pumped solid-state laser in the 1.5- $\mu\text{m}$  range,” *Appl. Phys. B* **116**, 593–601 (2013).
  17. D. Matei, T. Legero, S. Häfner, C. Grebing, R. Weyrich, W. Zhang, L. Sonderhouse, J. Robinson, J. Ye, F. Riehle, and U. Sterr, “1.5  $\mu\text{m}$  Lasers with Sub-10 mHz Linewidth,” *Phys. Rev. Lett.* **118** (2017).
  18. G. Bailly, O. Llopis, and A. Fernandez, “High Spectral Purity Optical Source Stabilized on a Fiber Ring Resonator,” *IEEE Photonics Technol. Lett.* **32**, 255–258 (2020).
  19. K. Takahashi, M. Ando, and K. Tsubono, “Stabilization of laser intensity and frequency using optical fiber,” *J. Physics: Conf. Ser.* **122**, 012016 (2008).
  20. P. Kwee and B. Willke, “Automatic laser beam characterization of monolithic Nd:YAG nonplanar ring lasers,” *Appl. Opt.* **47**, 6022 (2008).
  21. OptaSense Inc. <https://rio-lasers.com>.
  22. K. Numata, J. Camp, M. A. Krainak, and L. Stolpner, “Performance of planar-waveguide external cavity laser for precision measurements,” *Opt. Express* **18**, 22781 (2010).
  23. H. Tsuchida, “Characterization of white and flicker frequency modulation noise in narrow-linewidth laser diodes,” *IEEE Photonics Technol. Lett.* **23**, 727–729 (2011).
  24. NKT Photonics A/S. <https://www.nktphotonics.com>.
  25. NP Photonics Inc. <http://www.npphotonics.com>.
  26. Thorlabs Inc. <https://www.thorlabs.com>.
  27. Laser Zentrum Hannover e.V. <https://www.lzh.de>.
  28. E. Morrison, B. J. Meers, D. I. Robertson, and H. Ward, “Automatic alignment of optical interferometers,” *Appl. Opt.* **33**, 5041–5049 (1994).
  29. D. Z. Anderson, “Alignment of resonant optical cavities,” *Appl. Opt.* **23**, 2944–2949 (1984).
  30. C. J. Erickson, M. V. Zijl, G. Doermann, and D. S. Durfee, “An ultrahigh stability, low-noise laser current driver with digital control,” *Rev. Sci. Instruments* **79**, 073107 (2008).
  31. D. L. Troxel, C. J. Erickson, and D. S. Durfee, “Note: Updates to an ultra-low noise laser current driver,” *Rev. Sci. Instruments* **82**, 096101 (2011).
  32. E. D. Black, “An introduction to pound–drever–hall laser frequency stabilization,” *Am. J. Phys.* **69**, 79–87 (2001).
  33. P. Kwee, C. Bogan, K. Danzmann, M. Frede, H. Kim, P. King, J. Pödl, O. Puncken, R. L. Savage, F. Seifert, P. Wessels, L. Winkelmann, and B. Willke, “Stabilized high-power laser system for the gravitational wave detector advanced LIGO,” *Opt. Express* **20**, 10617 (2012).
  34. F. Meylahn and P. Kwee. <https://dcc.ligo.org/LIGO-D2000510/public>.
  35. G. D. Domenico, S. Schilt, and P. Thomann, “Simple approach to the relation between laser frequency noise and laser line shape,” *Appl. Opt.* **49**, 4801–4807 (2010).
  36. T. C. Ralph, E. H. Huntington, C. C. Harb, B. C. Buchler, P. K. Lam, D. E. McClelland, and H.-A. Bachor,

- “Understanding and controlling laser intensity noise,” *Opt. Quantum Electron.* **31**, 583–598 (1999).
37. G. A. Cranch, M. A. Englund, and C. K. Kirkendall, “Intensity noise characteristics of erbium-doped distributed-feedback fiber lasers,” *IEEE J. Quantum Electron.* **39**, 1579–1587 (2003).
  38. NKT Photonics A/S. <https://www.nktphotonics.com/lasers-fibers/2016/06/07/new-koheras-basik-adjustik-fiber-lasers/>.
  39. M. Digonnet, *Rare-Earth-Doped Fiber Lasers and Amplifiers, Revised and Expanded*, Optical Science and Engineering (Taylor & Francis, 2001).
  40. H. Tünnermann, J. Neumann, D. Kracht, and P. Weßels, “Gain dynamics and refractive index changes in fiber amplifiers: a frequency domain approach,” *Opt. Express* **20**, 13539–13550 (2012).
  41. K. Ebeling, *Integrated Optoelectronics : Waveguide Optics, Photonics, Semiconductors* (Springer Berlin Heidelberg, Berlin, Heidelberg, 1993).
  42. ET Science Team, “Einstein gravitational wave Telescope conceptual design study,” Tech. rep., Einstein gravitational wave Telescope (2011).
  43. F. Thies, N. Bode, P. Oppermann, M. Frede, B. Schulz, and B. Willke, “Nd:YVO<sub>4</sub> high-power master oscillator power amplifier laser system for second-generation gravitational wave detectors,” *Opt. Lett.* **44**, 719 (2019).
  44. O. de Varona, W. Fittkau, P. Booker, T. Theeg, M. Steinke, D. Kracht, J. Neumann, and P. Wessels, “Single-frequency fiber amplifier at 1.5  $\mu\text{m}$  with 100 W in the linearly-polarized TEM<sub>00</sub> mode for next-generation gravitational wave detectors,” *Opt. Express* **25**, 24880 (2017).