


## Notes

1. Custom cable assembled with 1 ea. male PEEK 9 pin connector with mounting ears, PEEK backshell(A+ procedure/customer supplied tubes and bands) & PEEK braid, 2 ea. 28 AWG stranded, twisted pairs and 2 ea. Kapton 28 AWG stranded wires along with customer supplied copper shield and 2 ea. PEEK feedthroughs(D2000453). 48" long. (D2100381 v1).

Rev.	Description	Date	Made By	Approval
A	Initial Release	6/10/2021	Farrell	

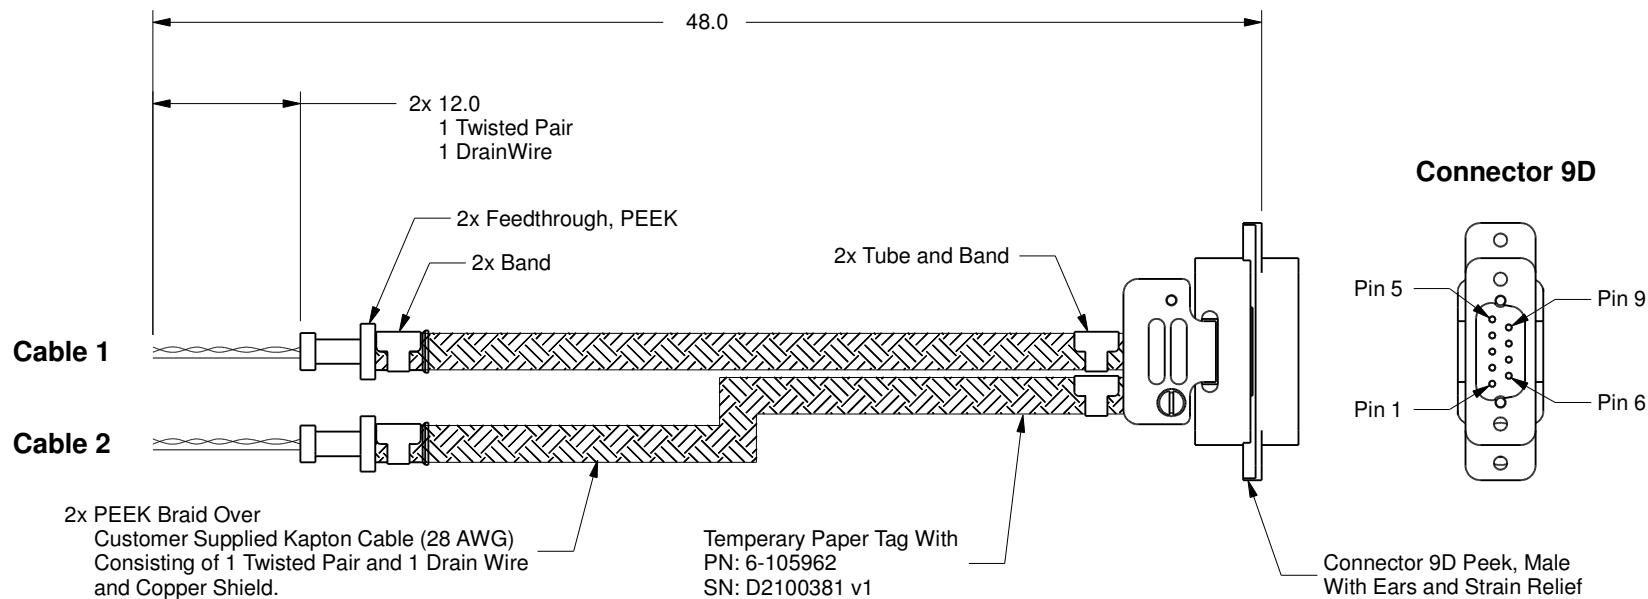

Connector 9D Male	Cable 1 Twisted Pair	Cable 2 Twisted Pair
1		Shield, Drain Wire
2		B
3	A	
4		
5		
6		B
7	Shield, Drain Wire	
8	A	
9		

**UNCONTROLLED WEB DRAWING**

Proprietary and Confidential  
The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material  
See Individual Components

Tolerances,  
unless otherwise specified

.X ± .030  
.XX ± .010  
.XXX ± .005

Angles ± 0.5°  
Finish 63Ra

Title

D2100381

Drawn by  
Date

Farrell  
6/10/2021

No. **6-105962**

Rev.

**A**

Approved

Sheet



**Accu-Glass Products Inc.**  
25047 Anza Drive  
Valencia, CA 91355  
T 818-365-4215  
F 818-365-7074  
www.accuglassproducts.com