


NOTES:

1. CLEAR ANODIZE PER MIL-A-8625

1/4-20 UNC-2B THRU  
(10X)

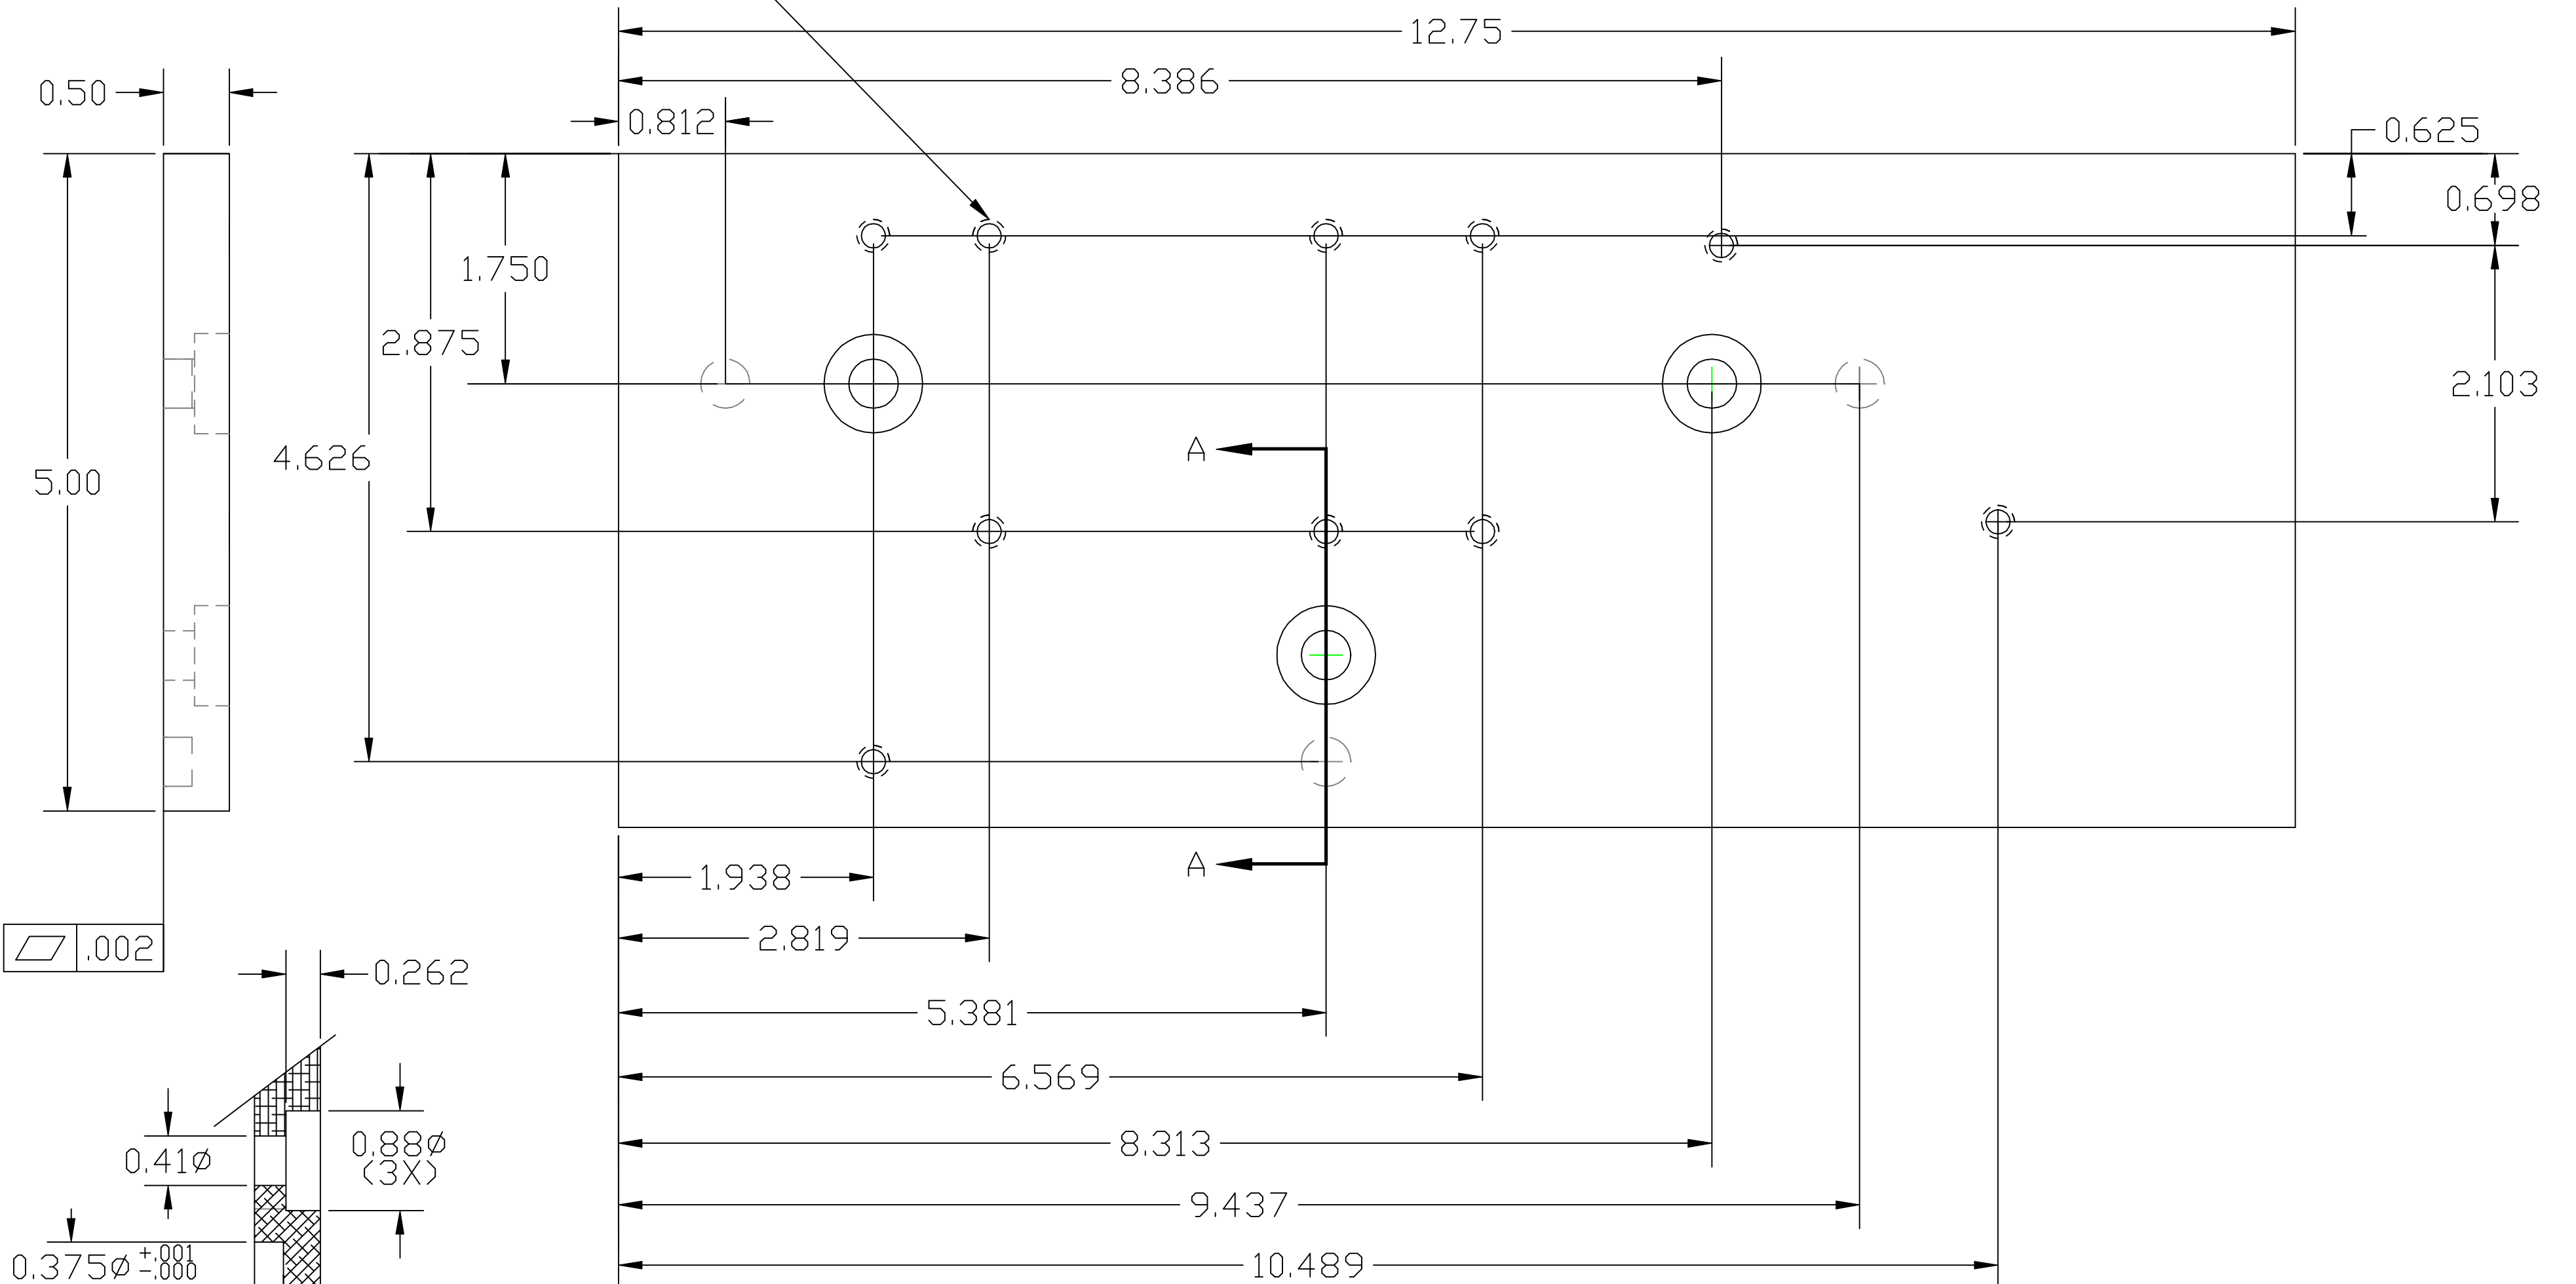

0.002

SECTION A-A

REF	QTY	PART or DRWG No.	CDS	MATERIAL
PARTS and MATERIAL LIST				
B		CH'D POSITION OF TAPPED HOLES	MASON	5/98
A		INITIAL RELEASE	MASON	5/98
00		PRE-RELEASE	K.MASON	4/29/97
REV		DESCRIPTION	DCC	SYS
			DET	CDS
			VE	CC
			BT	CHECK
			DRWN	DATE
ISSUE DESCRIPTION			SCALE	FULL
USED ON: D970102/D970156/D970157/D970158/D970159/D970160			SHEET 1 of 1	

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN FEET [cm]  
TOLERANCES: FRACTIONAL ±1/16(.16) FINISHED SURFACE RMS 63  
ANGULAR ±1° BREAK CORNERS .02  
TWO PLACE DECIMAL ±.01(.025) REMOVE ALL BURRS  
THREE PLACE DECIMAL ±.005(.013)  
MATERIAL: MIC-6/ HEAT TREAT: - FINISH: SEE NOTE 1  
6061-T6 ALUM.

CALIFORNIA INSTITUTE OF TECHNOLOGY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY  
KINEMATIC PLATE  
LIGHT SOURCE ASSY.  
OPTICAL LEVER  
CAD FILE: D970104-B.DWG  
SIZE: C  
DWG. NO.: D970104-B-D  
SCALE: FULL  
SHEET: 1 of 1