
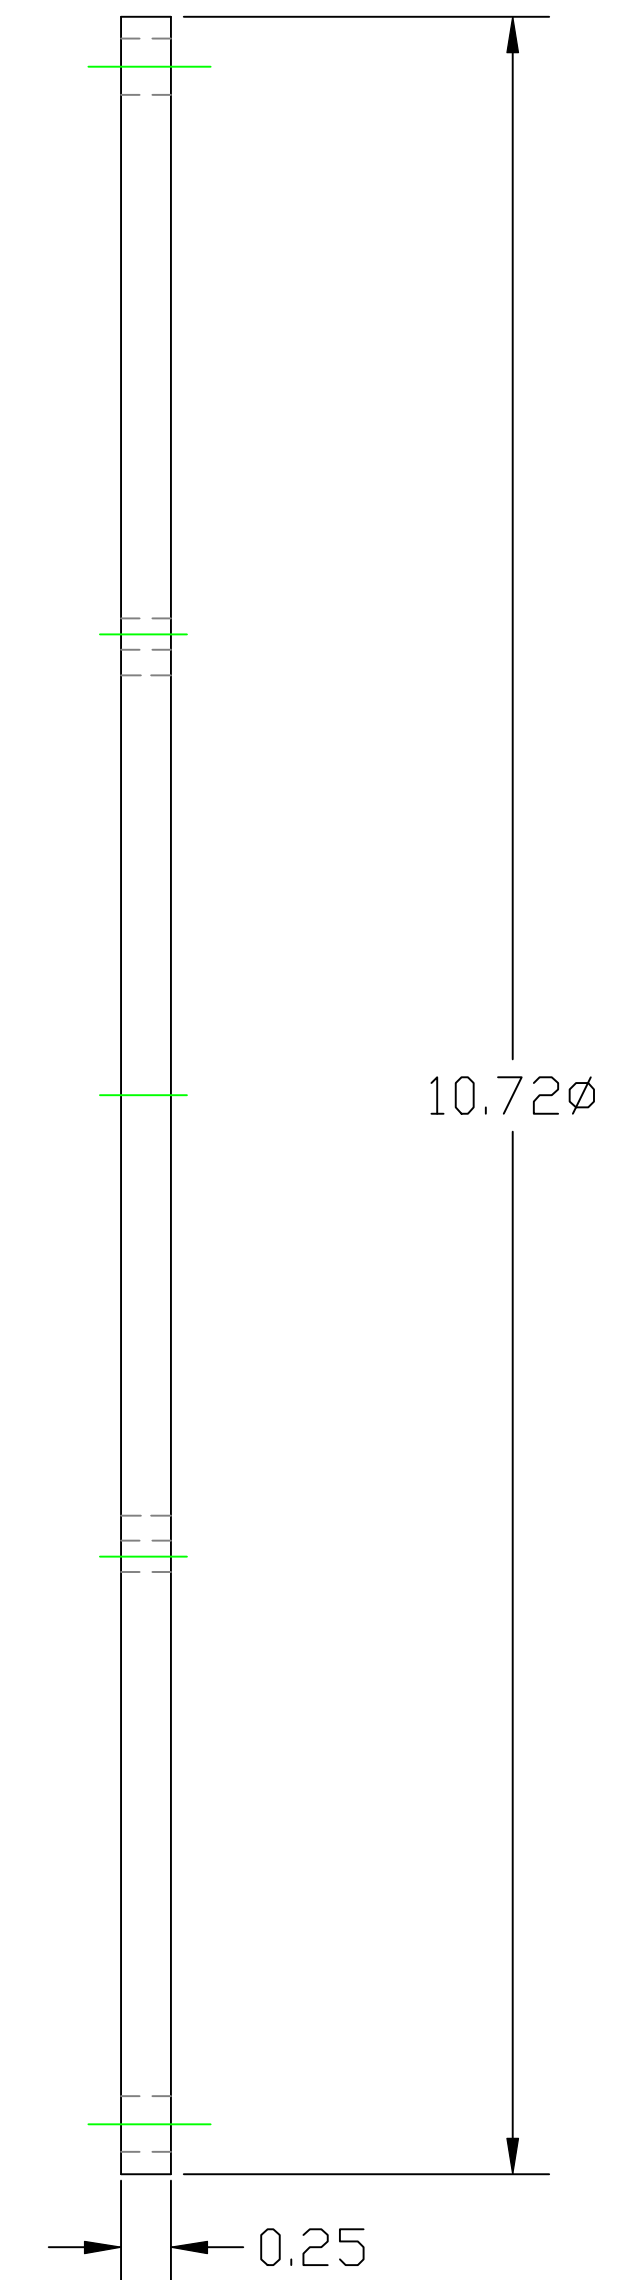


NOTES:
 1. CLEAR ANODIZE PER MIL-A-8625

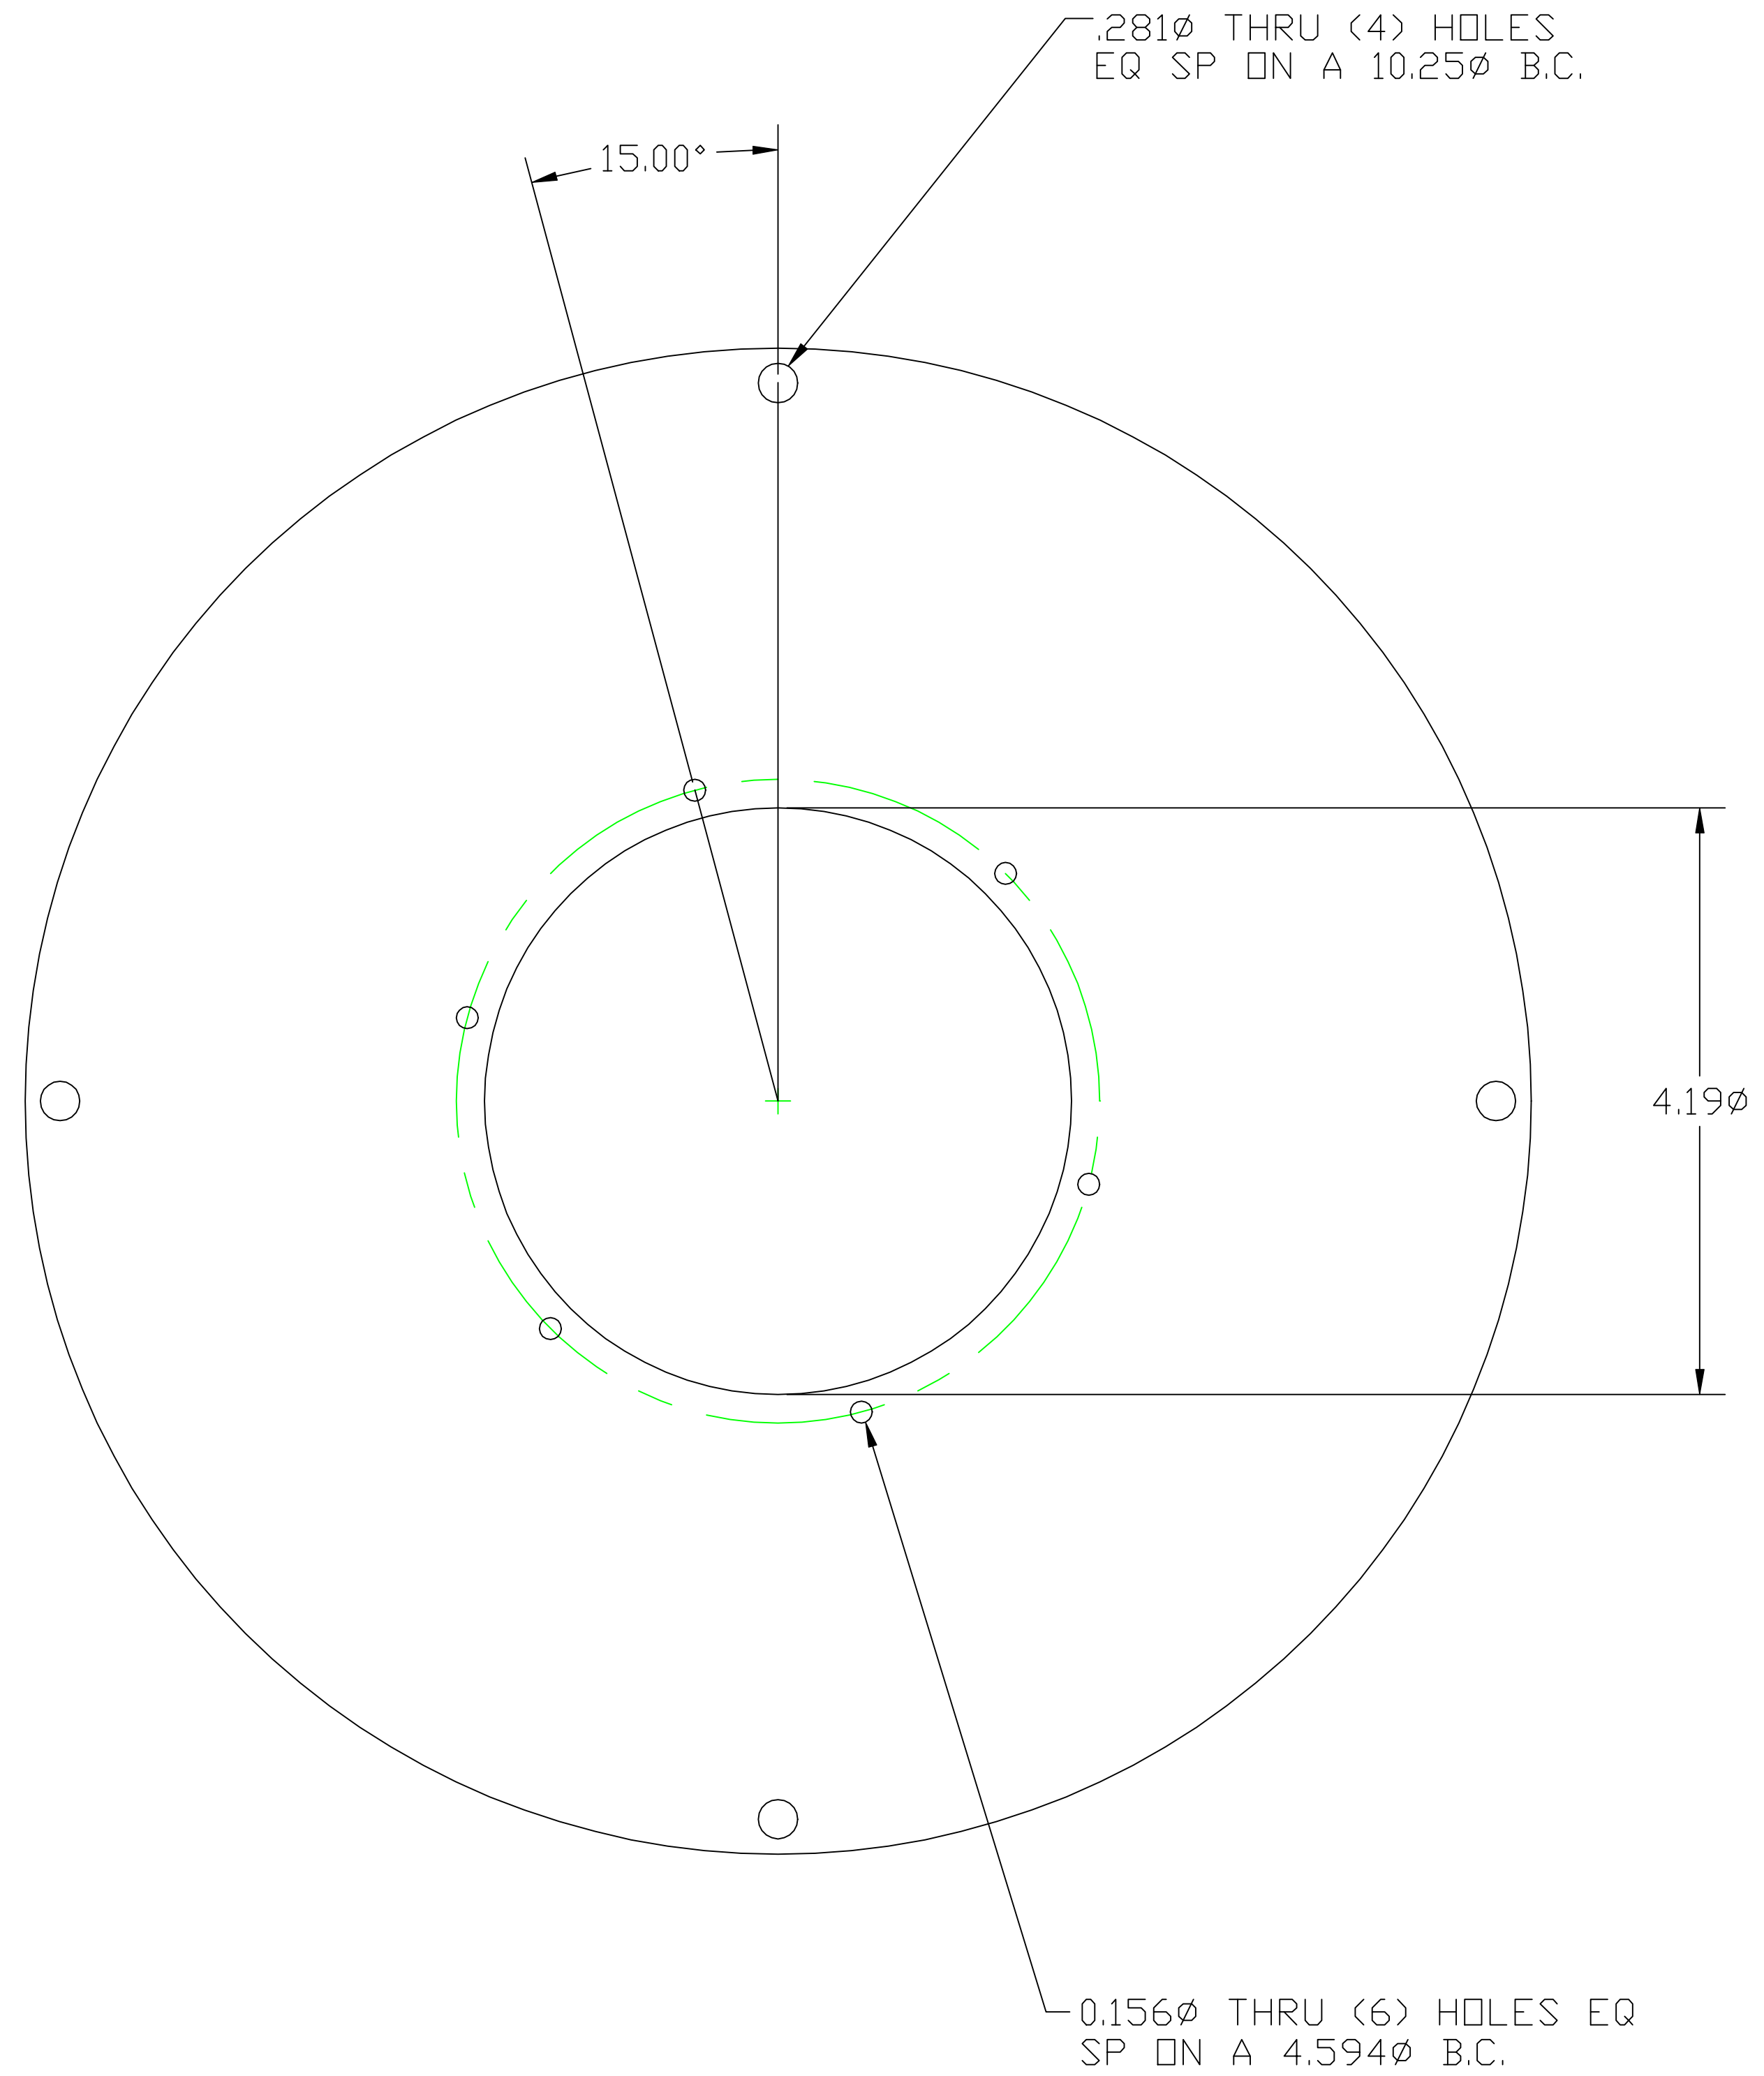

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES

TOLERANCES:
 FRACTIONAL ± 1/16(16)
 ANGULAR ± 1°
 TWO PLACE DECIMAL ± .01(.025)
 THREE PLACE DECIMAL ± .005(.013)

FINISHED SURFACE RMS 63
 BREAK CORNERS IN: .02
 OUT: .02
 REMOVE ALL BURRS

MATERIAL: 6061-T6 ALUM
 HEAT TREAT: NONE
 FINISH: SEE NOTE 1

USED ON: D970212-00-D
 NEXT ASS'Y: -

REV	DESCRIPTION	DCC	SYS	DET	CDS	VE	CC	BT	CHECK	DRWN	DATE
B	ADDED NOTE 1									MASON	9/98
A	INITIAL RELEASE									MASON	5/98
00	PRE-RELEASE									K.MASON	9/4/97

LIGO
 CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

ILLUMINATOR MOUNT
 VIDEO IMAGING
 ASC ALIGNMENT

CAD FILE: D970217-B.dwg
 SCALE: FULL

SIZE: D
 DWG. NO.: D970217-B-D
 SHEET: 1 of 1