
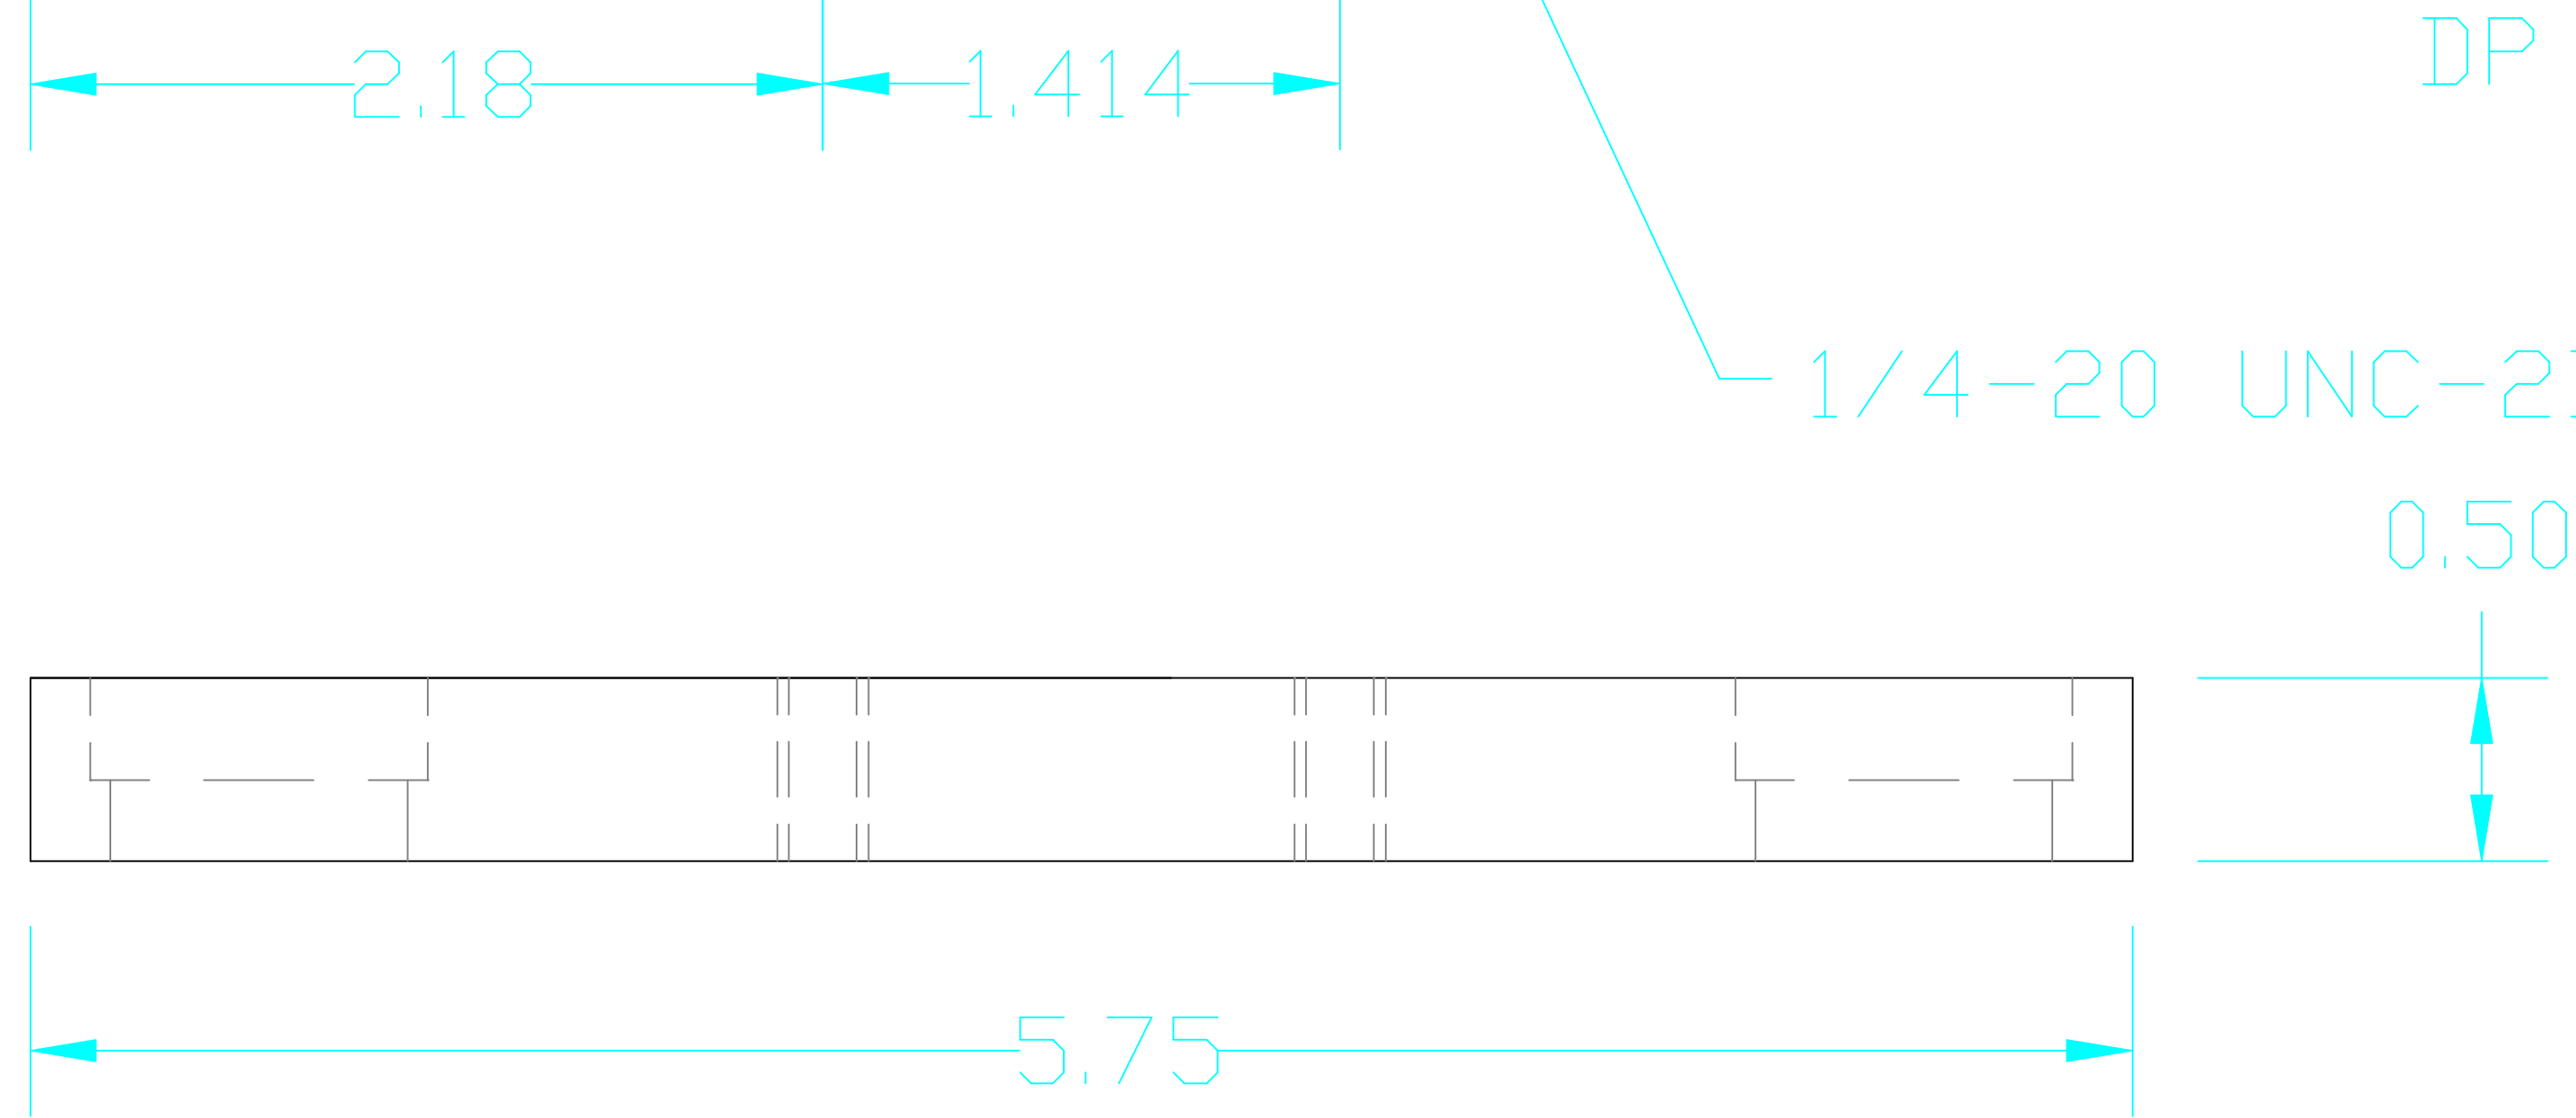


1. CLEAR ANODIZE PER MIL-A-8625

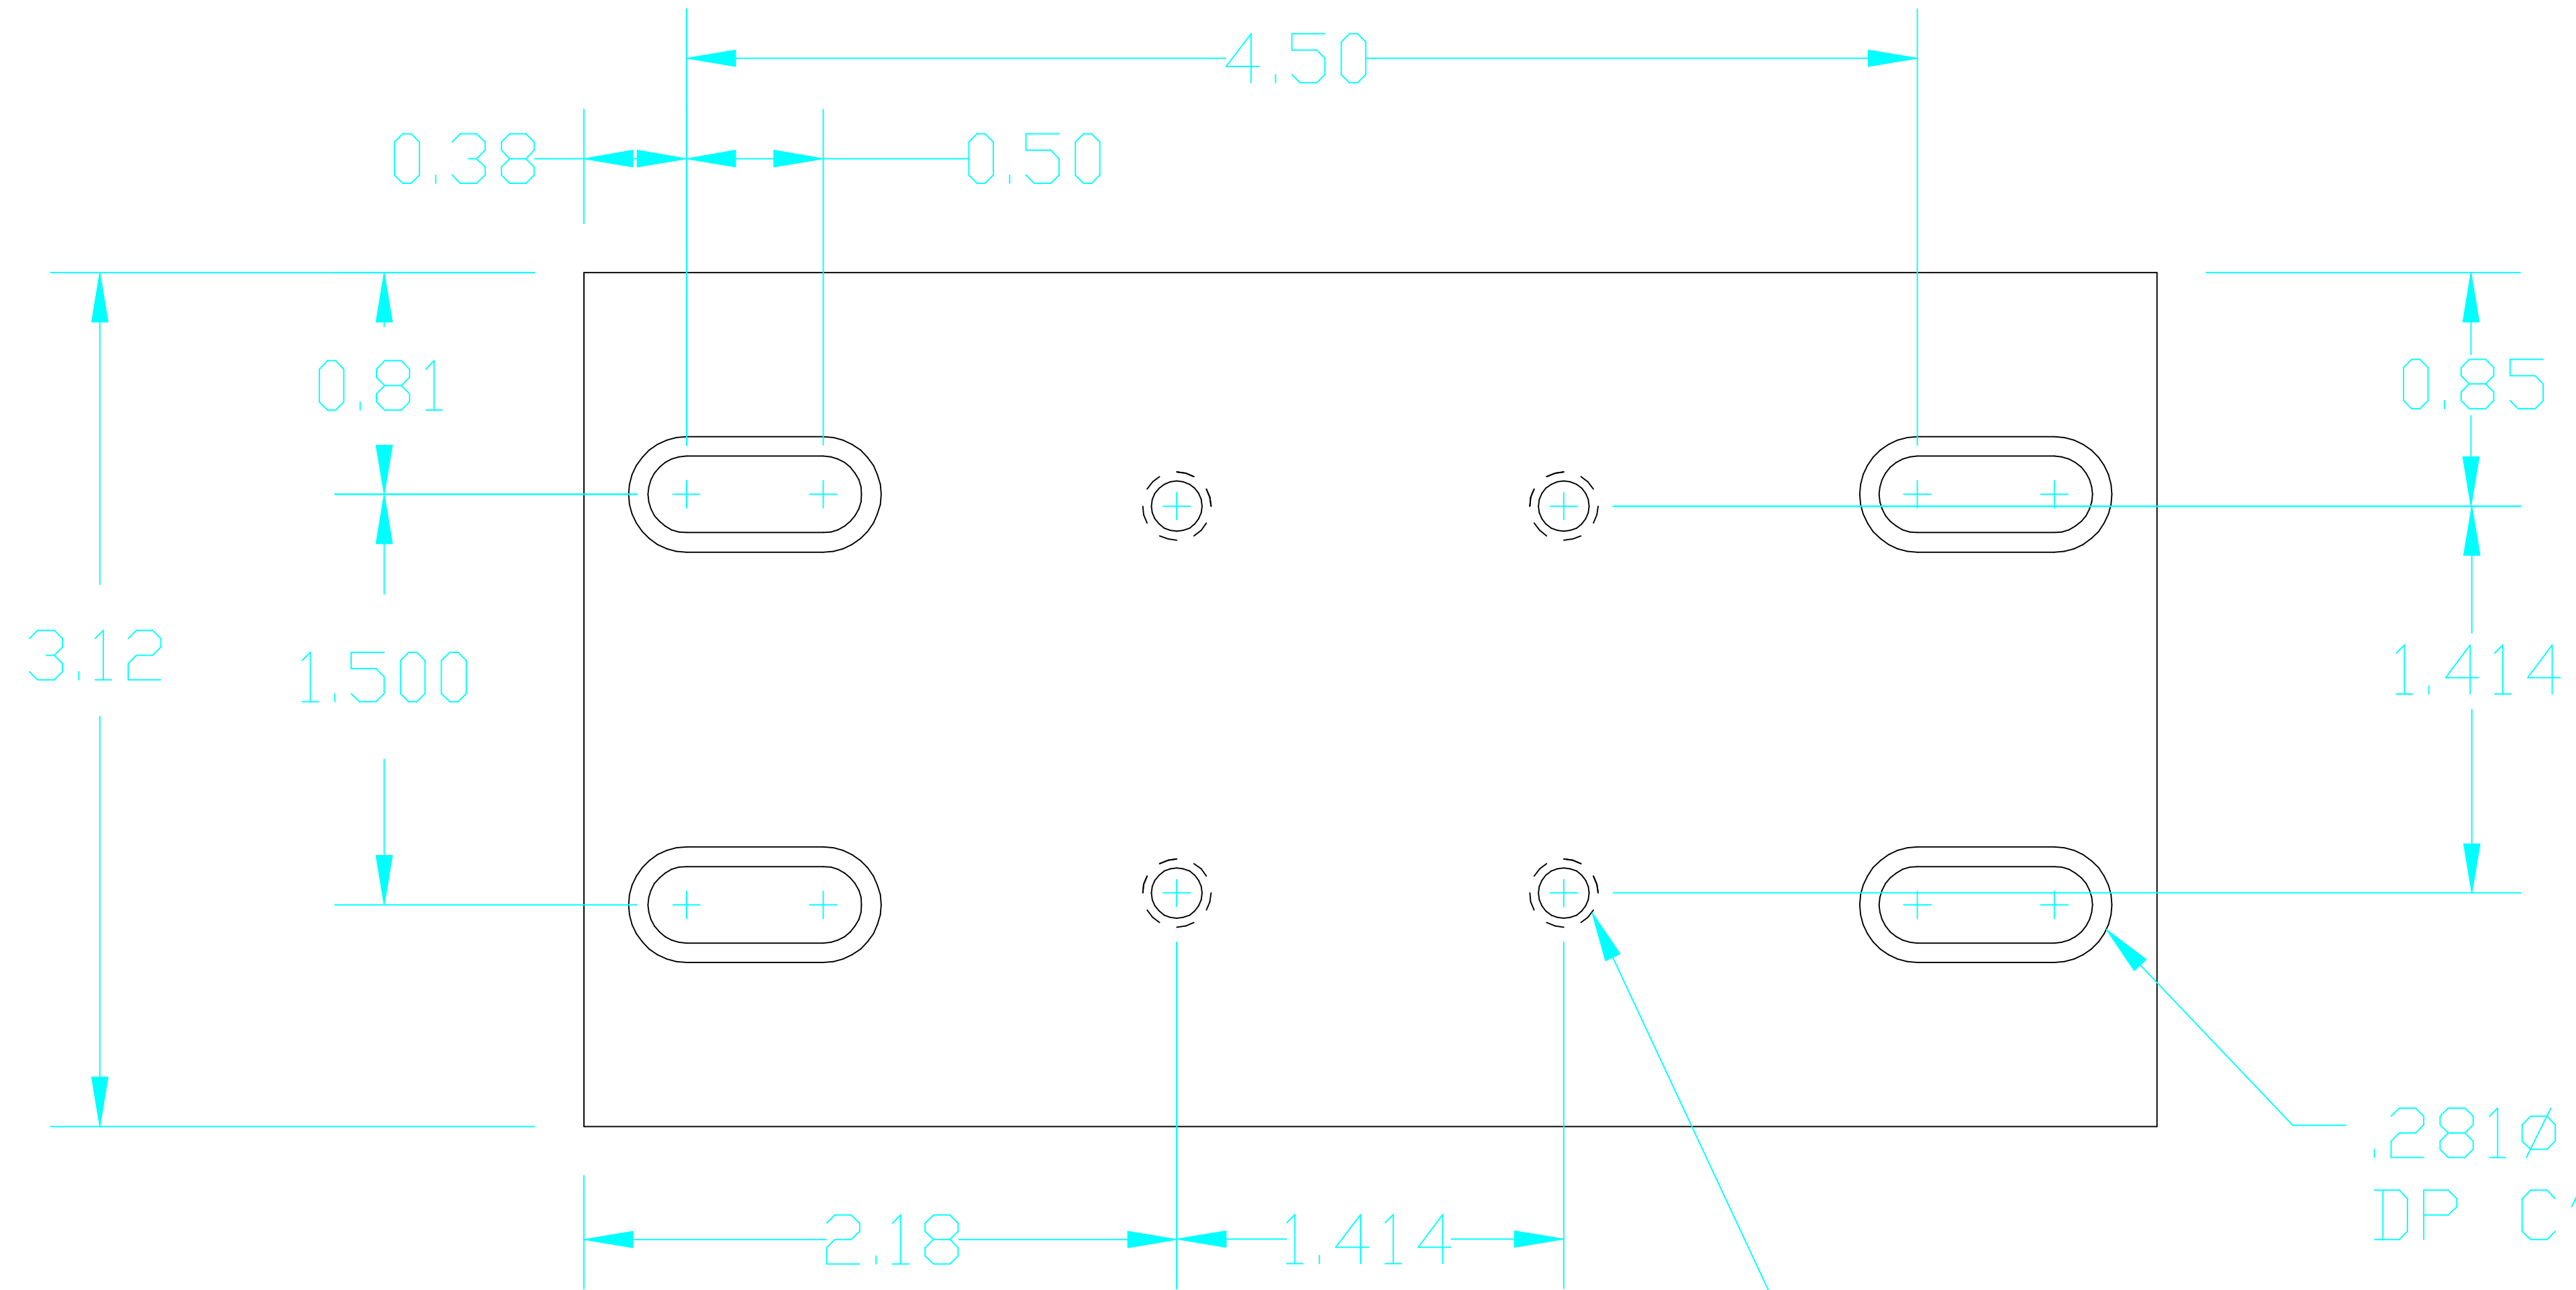

.281Ø THRU PLUS .422 x .28  
DP C'BORE (4) PLC'S

1/4-20 UNC-2B THRU (4) PLC'S

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES										MIT CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY			
		TOLERANCES: FRACTIONAL ±1/16(.16) ANGULAR ± 1° TWO PLACE DECIMAL ±.01(.025) THREE PLACE DECIMAL ±.005(.013)					FINISHED SURFACE RMS 63 BREAK CORNERS IN: .02 REMOVE ALL BURRS					SPACER BLOCK ISC TABLE ASSEMBLY			
		MATERIAL: 6061-T6 ALUM.		HEAT TREAT: -		FINISH: -		A INITIAL RELEASE		MASON 3/00		CAD FILE D980331-A.dwg		SIZE DWG. NO. B D980331-A-D	
DWG. NO.		DESCRIPTION REFERENCE DRAWINGS		USED ON: D980327-A		NEXT ASS'Y: -		REV		DESCRIPTION		DCC SYS DET CDS VE CC BT CHECK DRWN DATE		SCALE FULL SHEET 1 OF 1	