


1. CLEAR ANODIZE PER MIL-A-8625

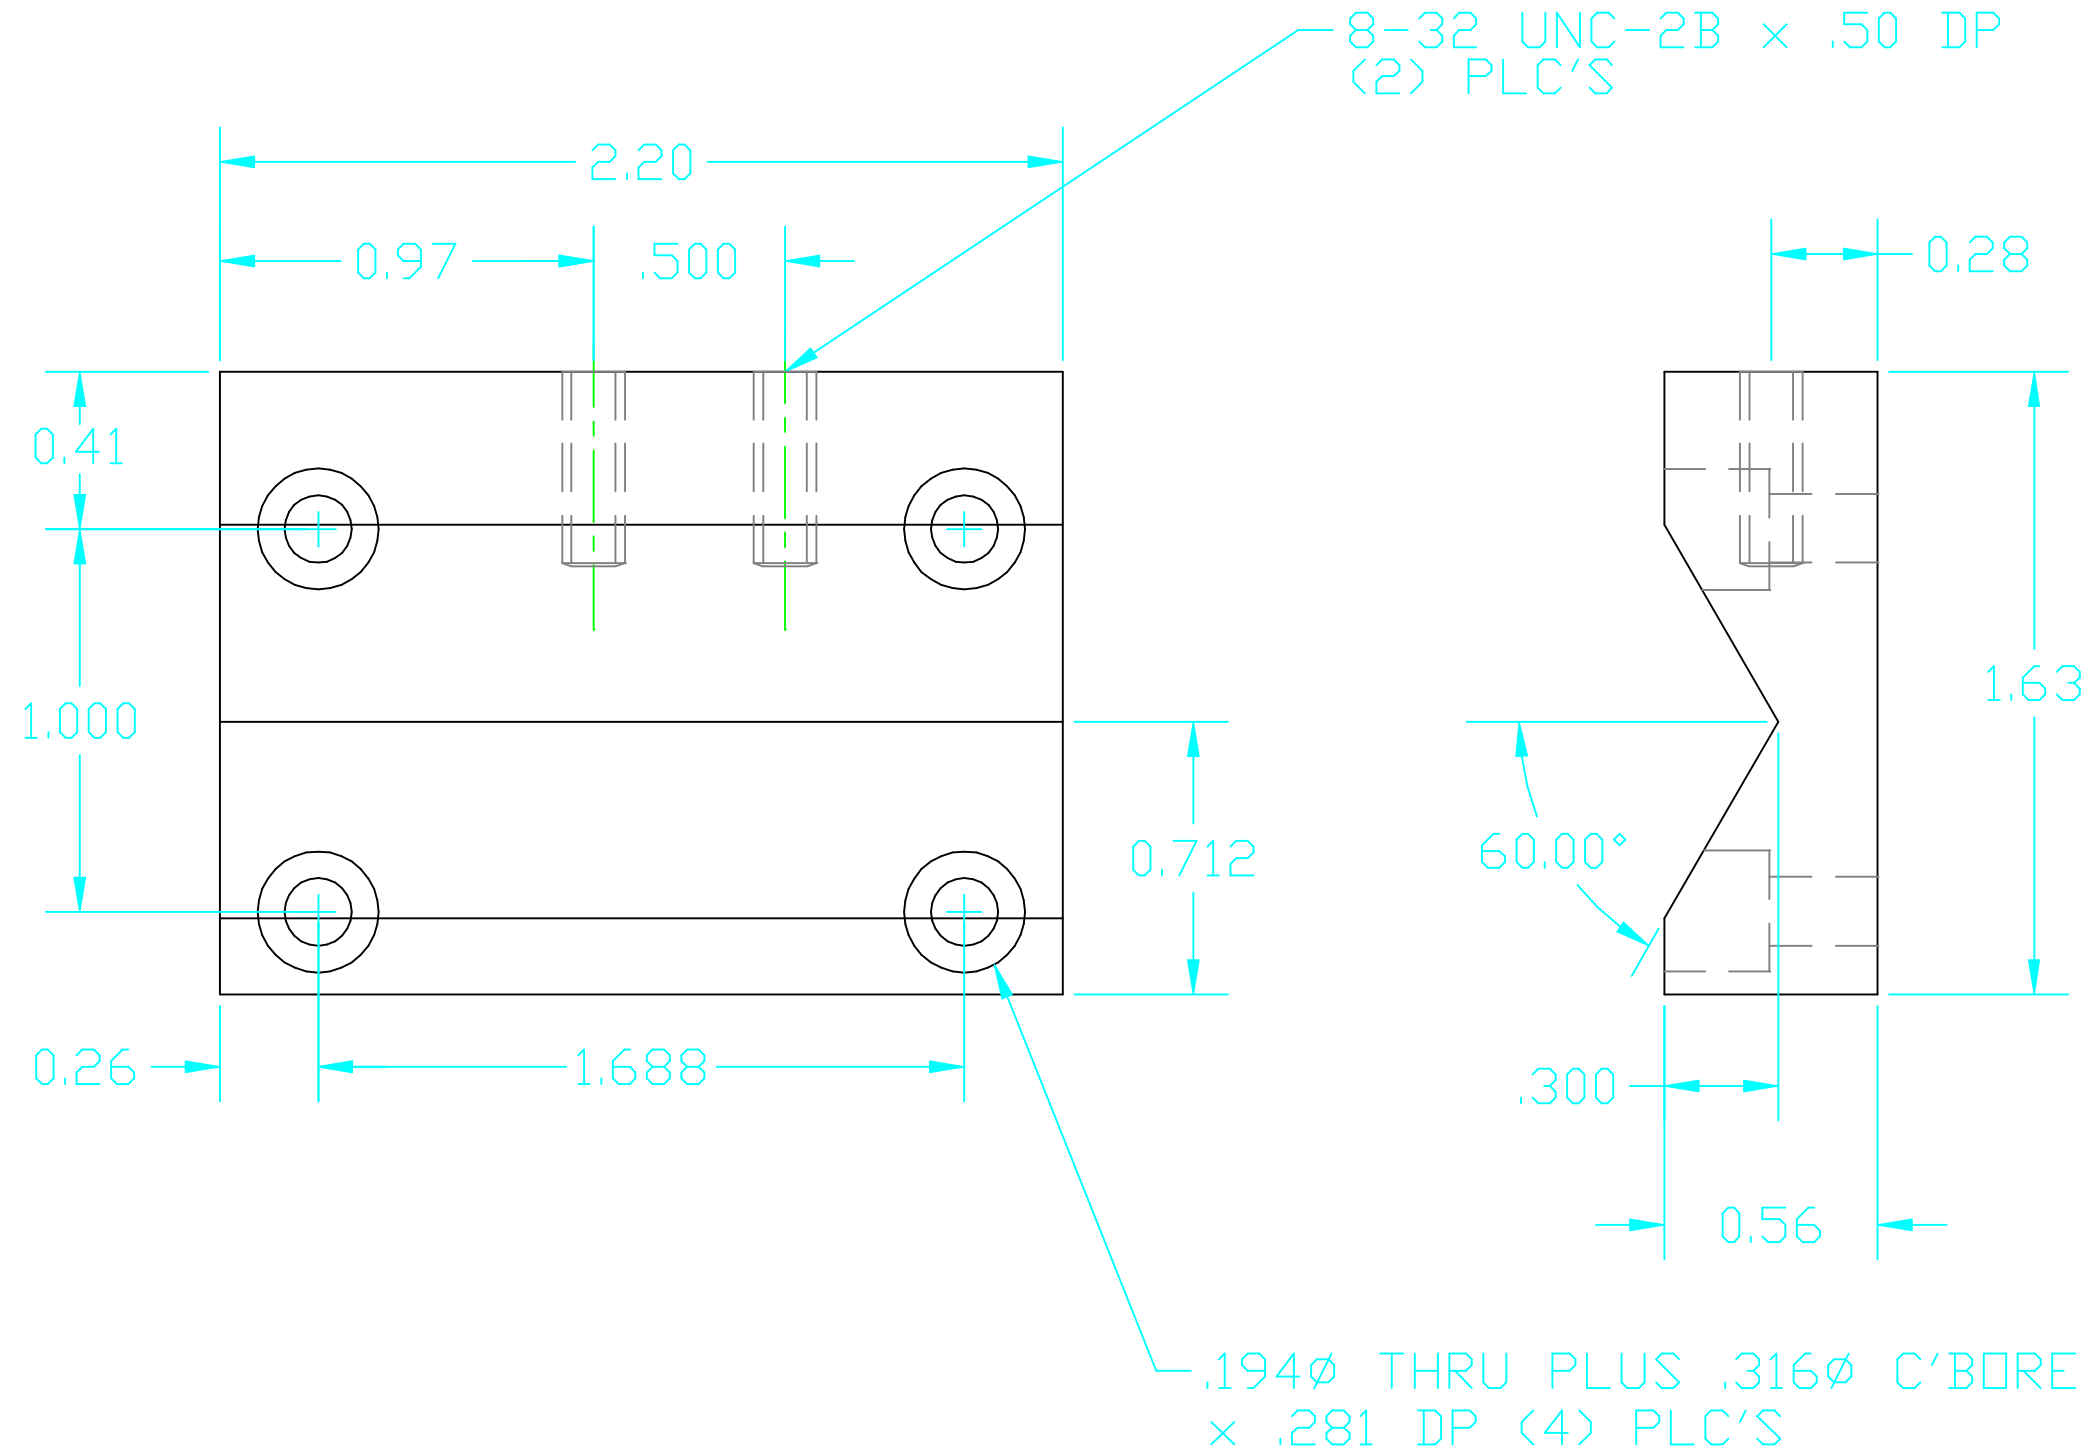

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES:
FRACTIONAL ± 1/16(.16)
ANGULAR ± 1°
TWO PLACE DECIMAL ± .01(.025)
THREE PLACE DECIMAL ± .005(.013)

FINISHED SURFACE RMS 63
BREAK CORNERS IN: OUT: .02
REMOVE ALL BURRS

MATERIAL: 6061-T6 ALUM.
HEAT TREAT: -
FINISH: -

USED ON: D980327-A-D
NEXT ASS'Y: -

| REV | DESCRIPTION | DCC | SYS | DET | CDS | VE | CC | BT | CHECK | DRWN | DATE |
|-----|-----------------|-----|-----|-----|-----|----|----|----|-------|---------|---------|
| A | INITIAL RELEASE | | | | | | | | | MASDN | 3/00 |
| 00 | PRE-RELEASE | | | | | | | | | K.MASDN | 8/31/98 |

MIT CALIFORNIA INSTITUTE OF TECHNOLOGY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

V-BLOCK MOUNT
ELECTRO-OPTIC SHUTTER
ISC TABLE ASSEMBLY

CAD FILE: D980336-A-D.dwg
SCALE: 2x

SIZE: B
SHEET: 1 OF 1

| DWG. NO. | DESCRIPTION |
|----------|--------------------|
| | REFERENCE DRAWINGS |