


- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. STAMP OR ENGRAVE SERIAL NUMBER ON NOTED FACE OF PART PER LIGO L970196.
 2. ALL MACHINING FLUIDS SHALL BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE, AND SILICONE.

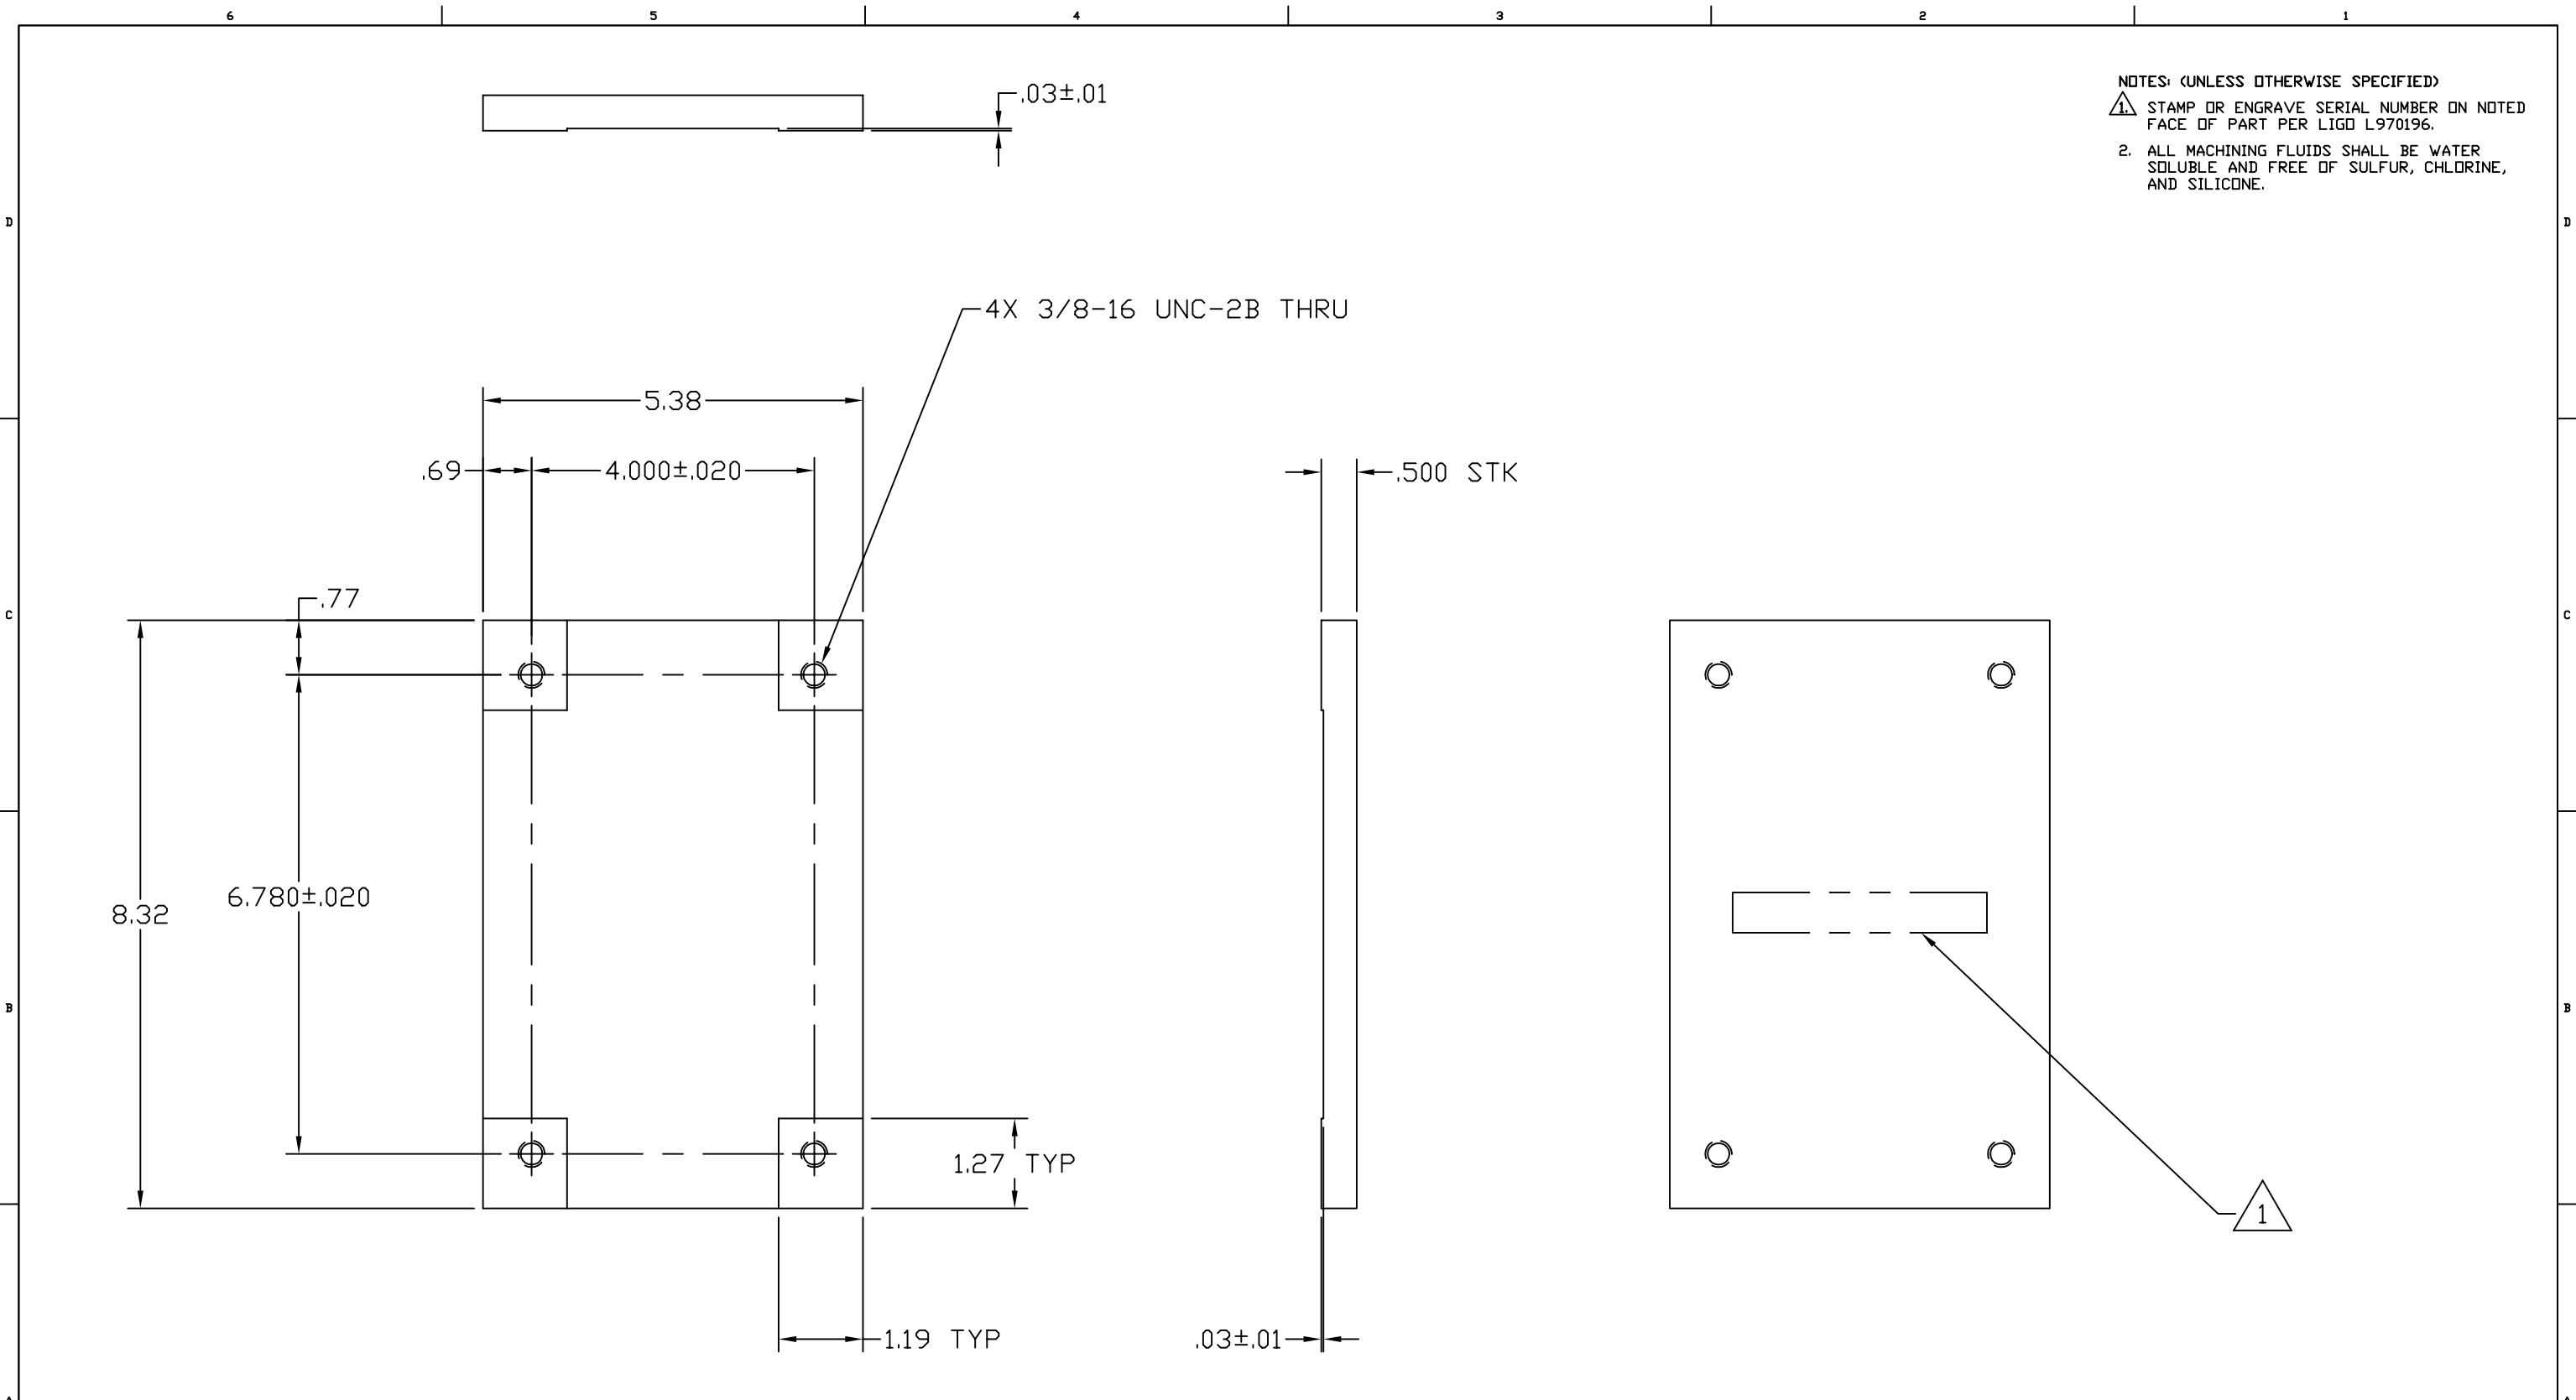

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES							LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY				
		TOLERANCES: FRACTIONAL ± ANGULAR ± ANGULAR MACH ± BEND ± TWO PLACE DECIMAL ±.01		THREE PLACE DECIMAL ±.005 FINISHED SURFACE RMS BREAK CORNERS IN: .005-.010 REMOVE ALL BURRS						CAVITY BEAM DUMP MOUNTING BRACKET BACKPLATE 1			
		MATERIAL: 6061-T6 ALUMINUM	HEAT TREAT:	FINISH:	A	DCN E990108	Conley	3-22-99	CAD FILE	SIZE DWG. NO.			
DWG. NO.	DESCRIPTION	USED ON:	NEXT ASS'Y: D990143	ISSUE DESCRIPTION	REV	DESCRIPTION	APPR'D	CHECK	DRWN	DATE	D990151-Adwg	B	D990151-A
REFERENCE DRAWINGS								SCALE	NTS	SHEET 1 OF 1			