
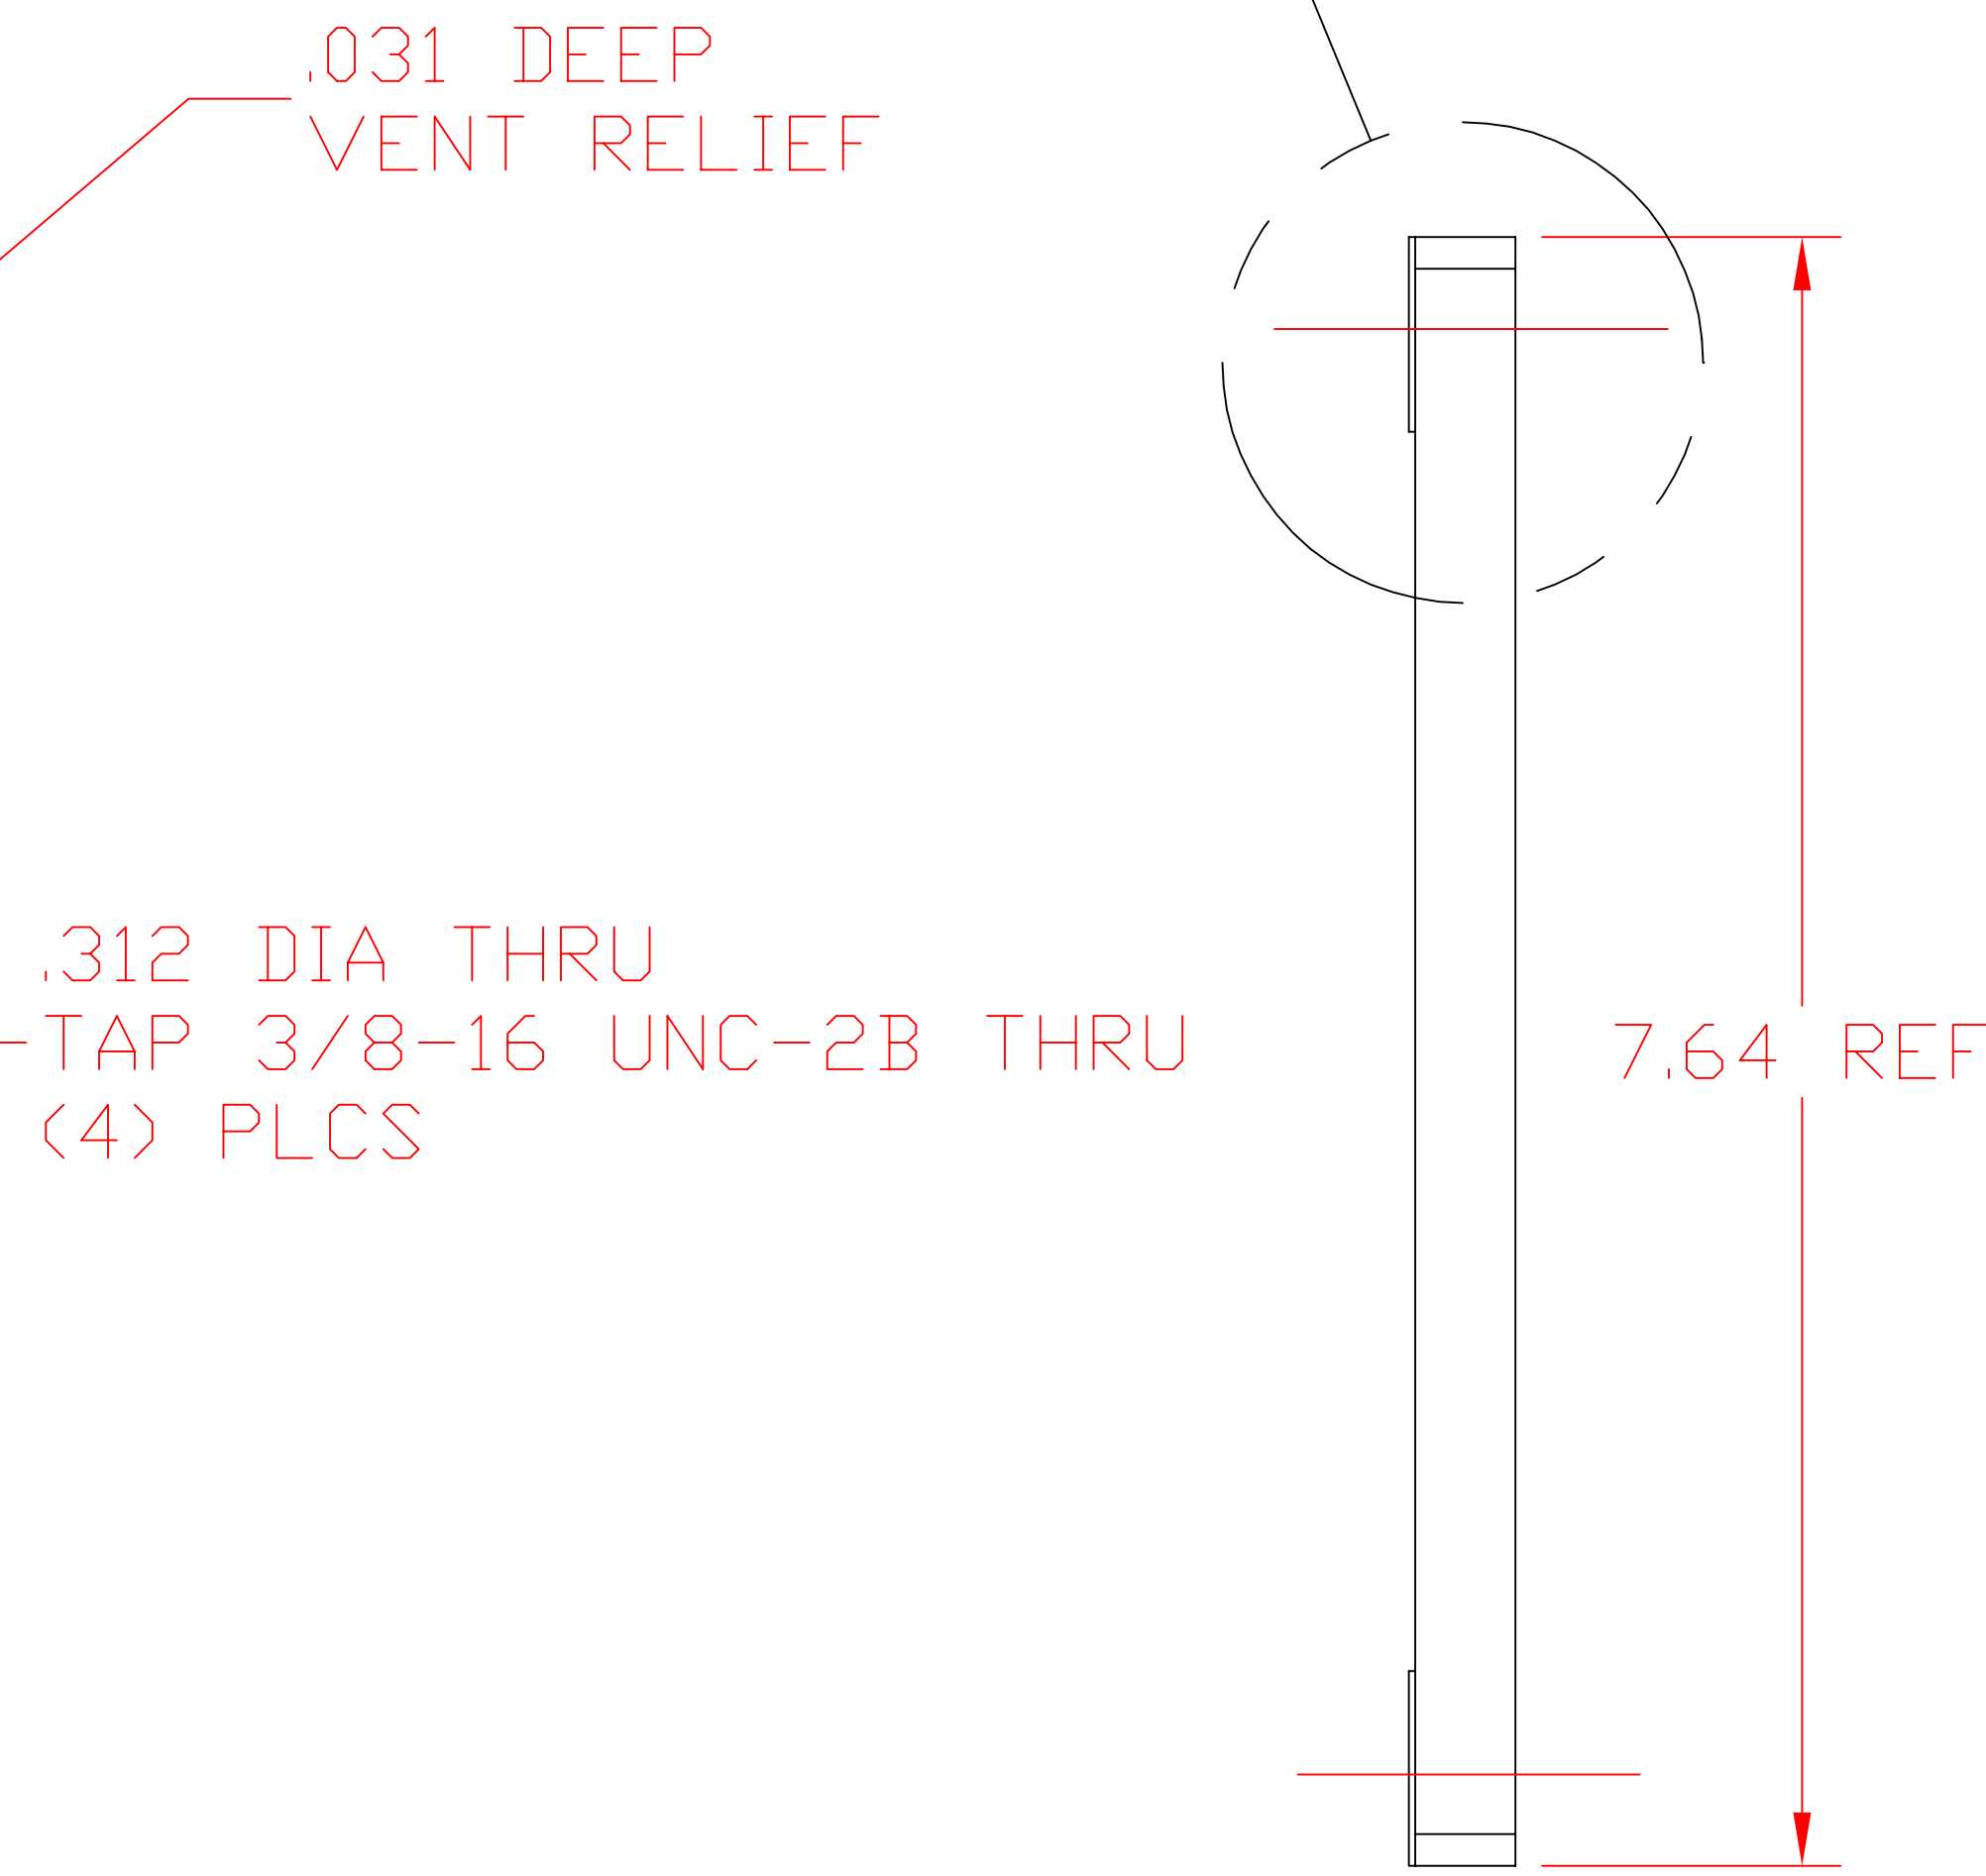
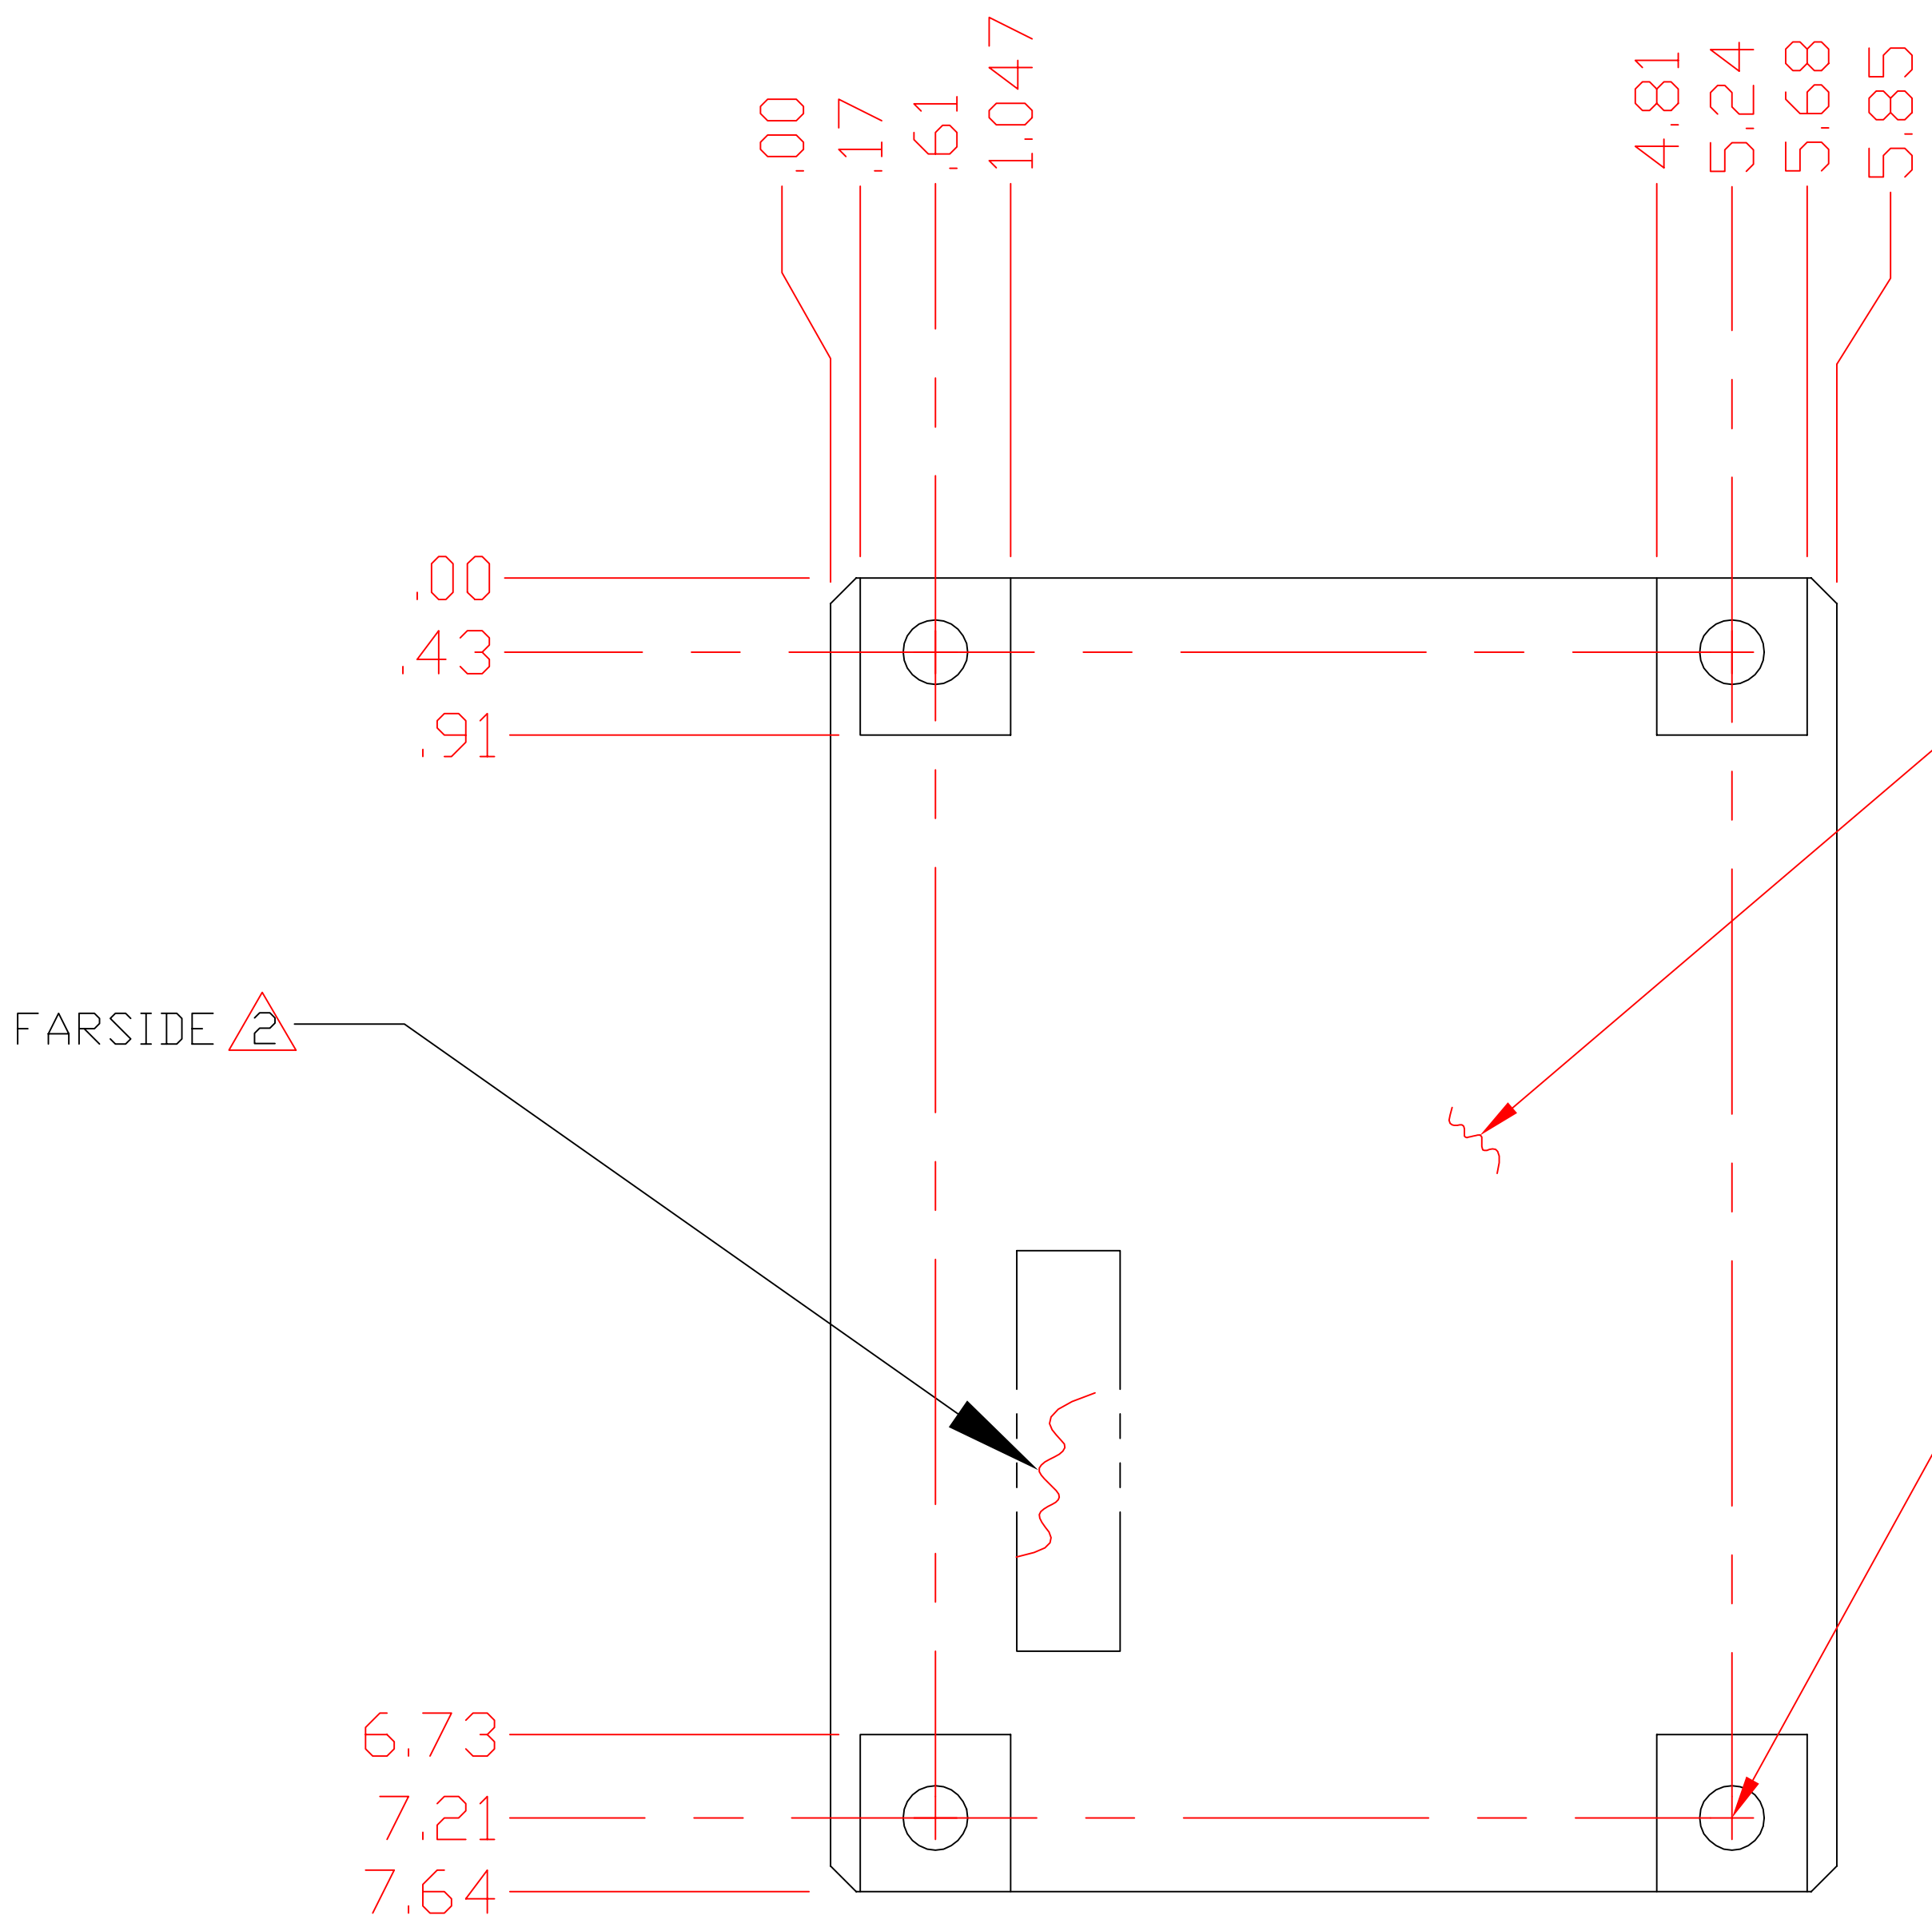
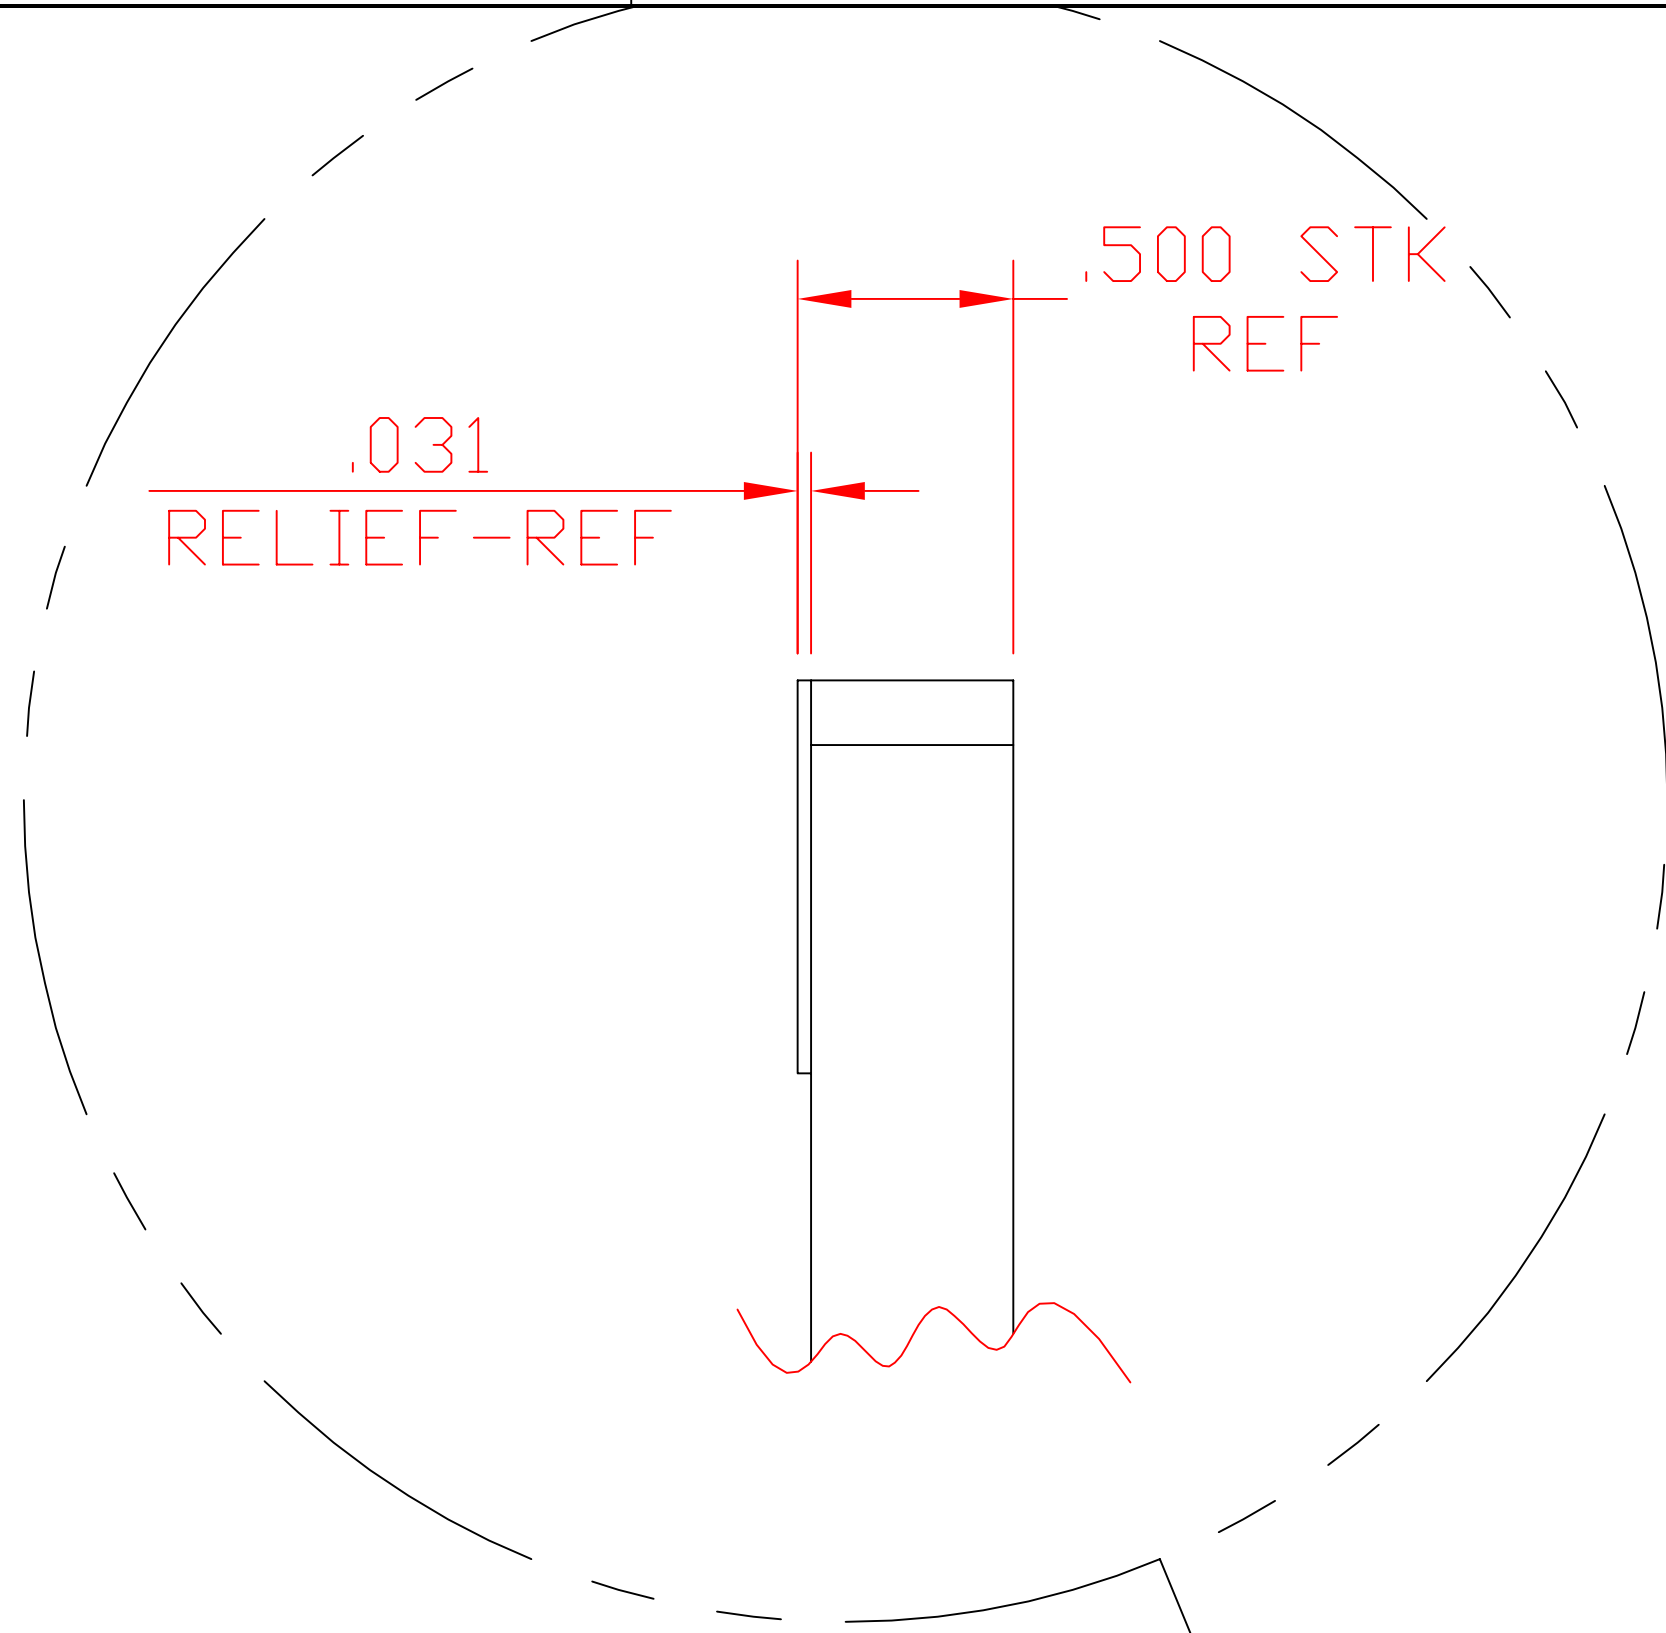


6 5 4 3 2 1

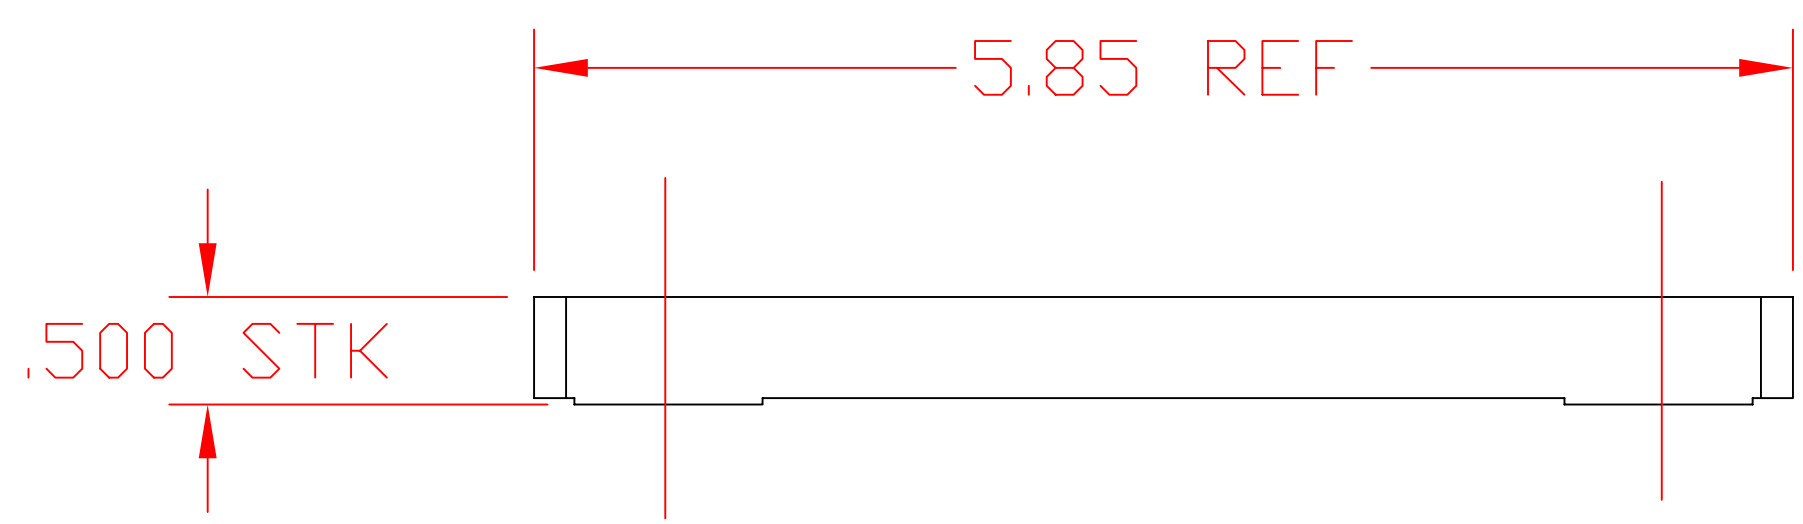

NOTES: (UNLESS OTHERWISE SPECIFIED)

- CUTTING FLUIDS TO BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE, & SILICONE.
- STEEL STAMP OR ENGRAVE THE DRAWING PART NUMBER ON NOTED FACE OF PART FOLLOWED BY "S/N", THEN A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS TO START AT 001 FOR FIRST PART AND PROCEED IN A CONSECUTIVE MANNER TO A MAXIMUM OF 999, FOR EACH SUCCEEDING PART PRODUCED. USE .013 HIGH CHARACTERS.
EXAMPLE: D990038-A S/N 001

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES:
FRACTIONAL ± 1/64
ANGULAR ± 1/2°
ANGULAR MACH ± BEND ±
TWO PLACE DECIMAL ±.02

THREE PLACE DECIMAL ±.010
FINISHED SURFACE RMS
BREAK CORNERS IN: .005-.010
REMOVE ALL BURRS

MATERIAL: 6061-T6 ALUMINUM
HEAT TREAT:
FINISH:

USED ON:
NEXT ASS'Y: D990143

B	RELEASE	E990200		Conley	5-6-99	
A	RELEASE	E990108		Conley	3-23-99	
REV	DESCRIPTION	DCN	APPR'D	CHECK	DRWN	DATE

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

CAVITY BEAM DUMP
MOUNTING BRACKET BACKPLATE 2

CAD FILE: D990152-B.dwg
SIZE: B
DWG. NO.: D990152-B
SHEET: 1 OF 1

6 5 4 3 2 1