


- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL ABRASIVE CUTTING TO BE DONE FROM NEAR SIDE.
  2. GLASS TO BE COVERED BY VINYL MASK ON BOTH SIDES PRIOR TO START OF MACHINING, AND REMOVED BEFORE SHIPMENT.
  3. MAKE FROM: #12 WELDERS FILTER GLASS (SCHOTT) 0.12" THICK.
  4. ETCH OR ENGRAVE THE DRAWING PART NUMBER ON NOTED FACE OF PART FOLLOWED BY "S/N", THEN A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS TO START AT 001 FOR FIRST PART A MAXIMUM OF 999, FOR EACH SUCCEEDING PART PRODUCED. USE 0.13 HIGH CHARACTERS. EXAMPLE: D990038-A S/N 001

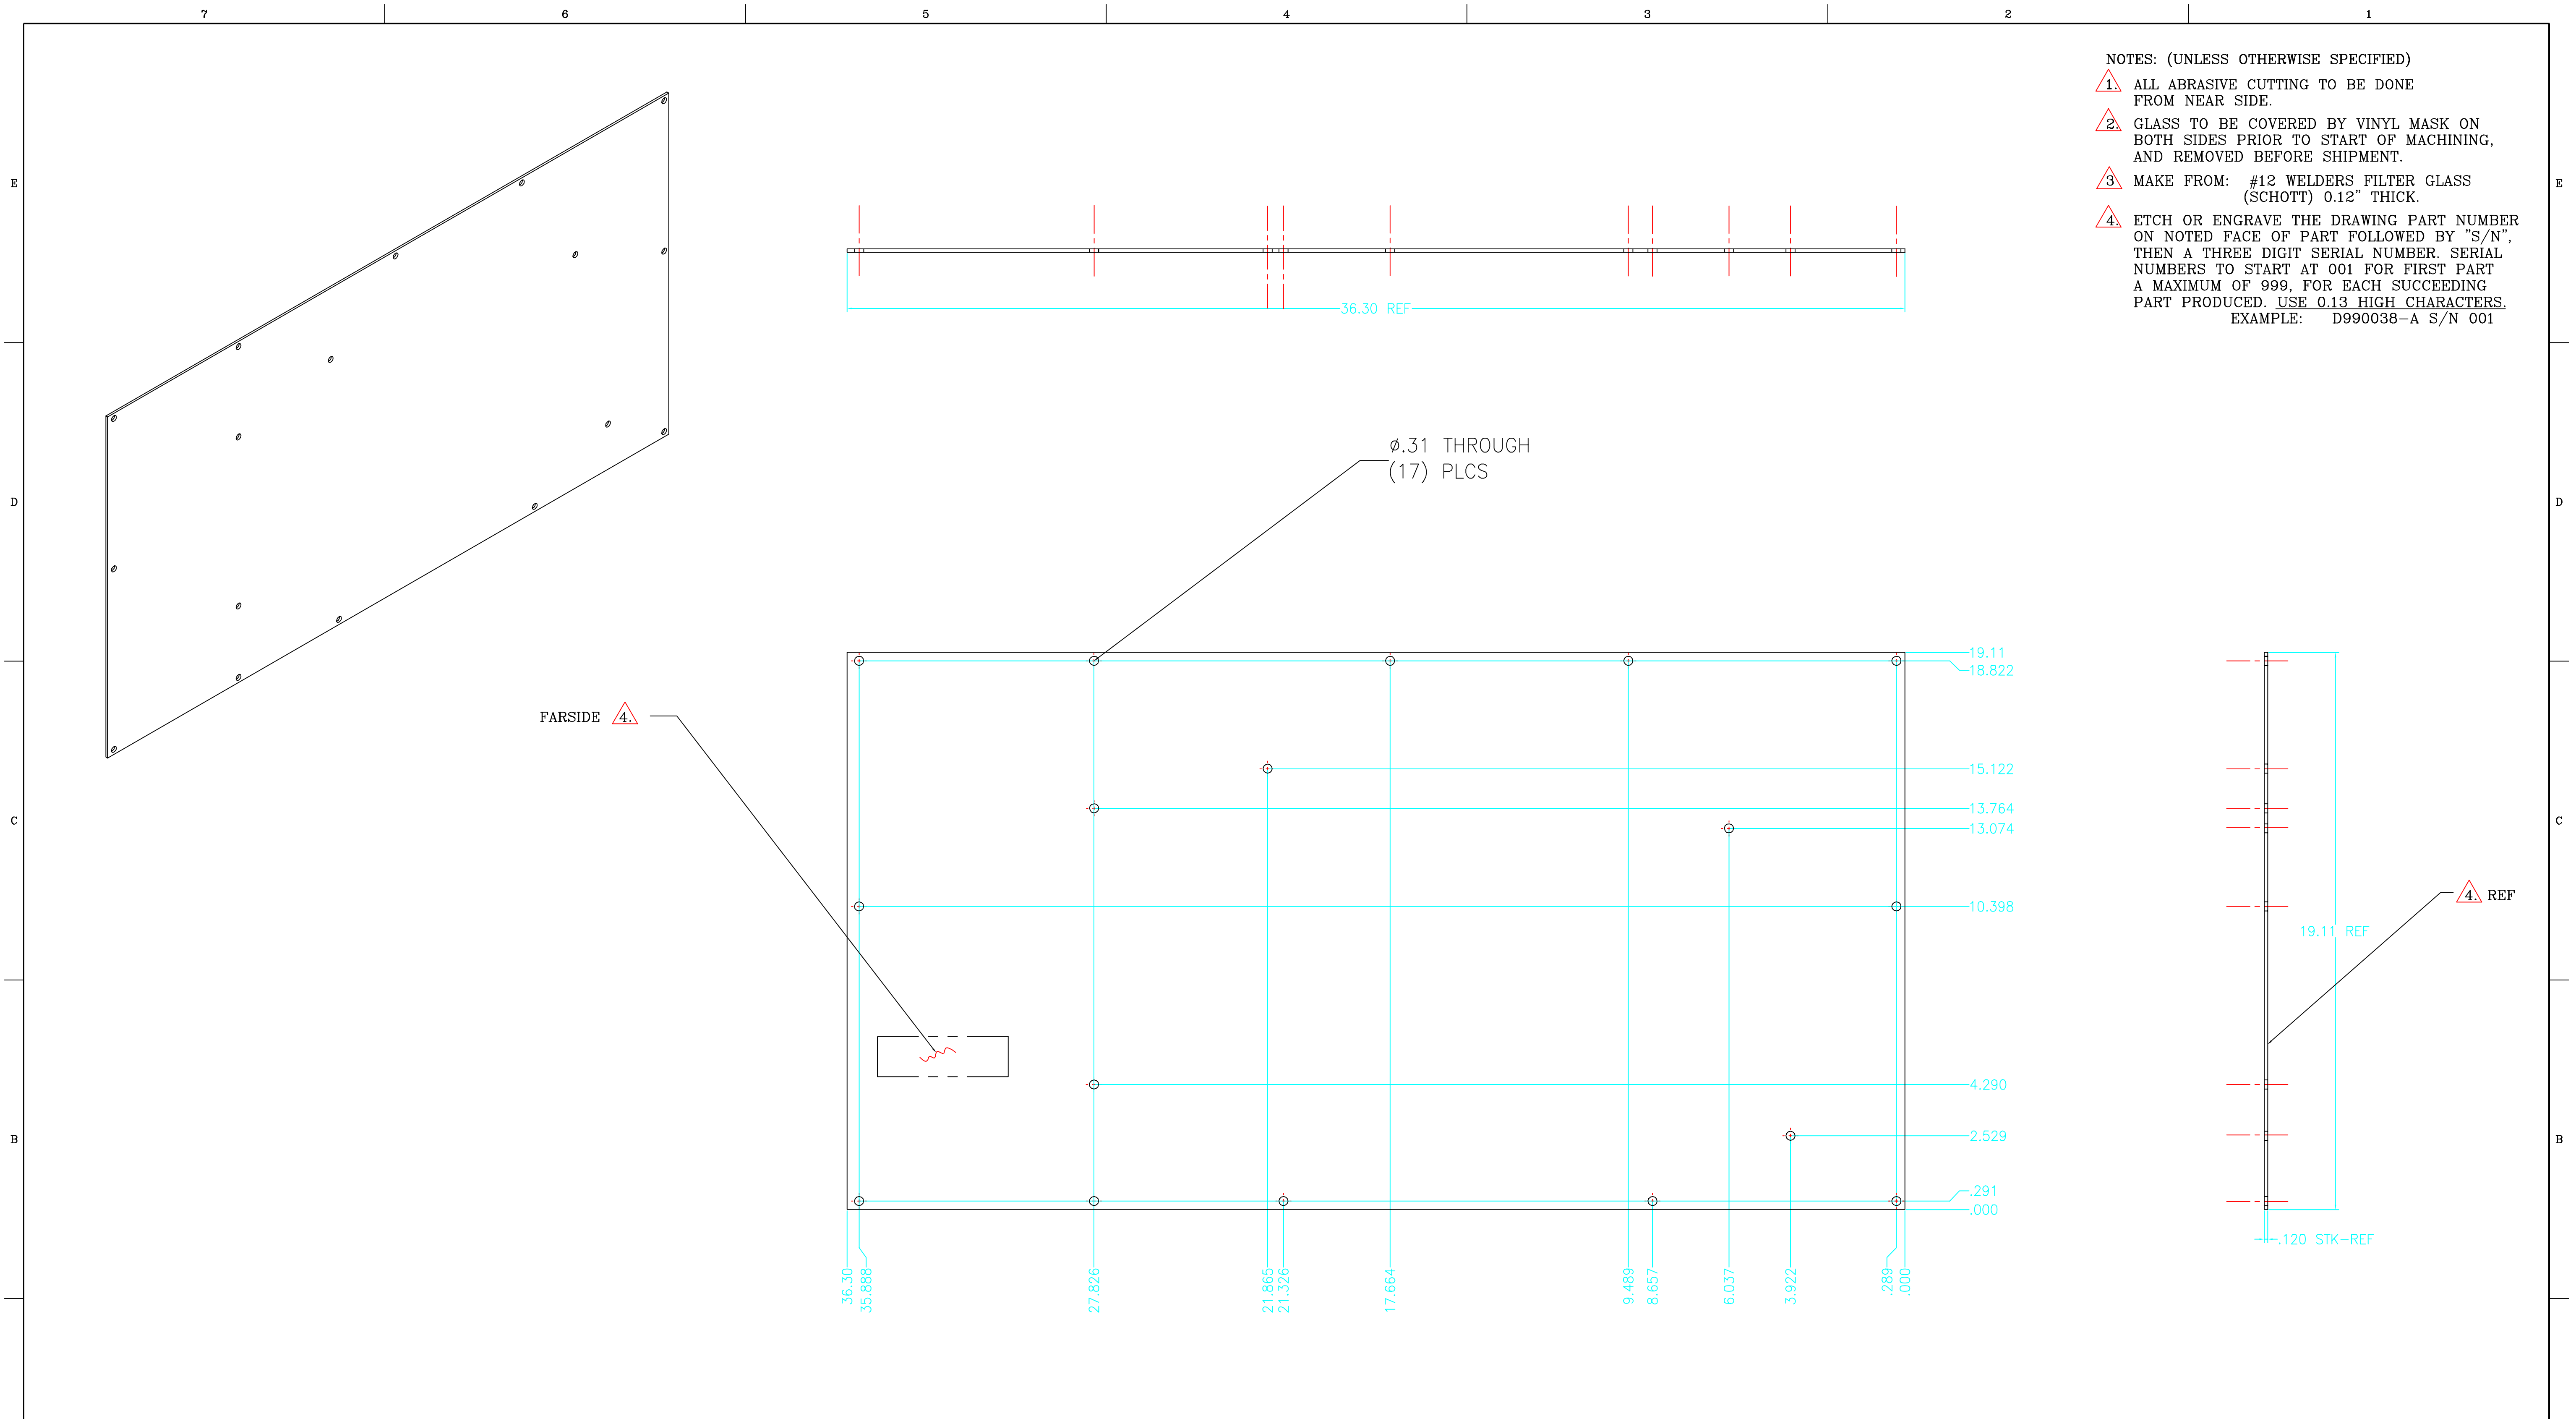

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES								LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY	
		TOLERANCES: FRACTIONAL ± 1/64 ANGULAR ± 1/2° TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005		INSIDE RADI FINISHED SURFACE RMS BREAK OUTSIDE CORNERS .002 - .010 REMOVE ALL BURRS						ARM CAVITY BAFFLE, GLASS 4E	
		MATERIAL: <span style="color: red;">△</span> 3.	HEAT TREAT:	FINISH: <span style="color: red;">△</span> 1. <span style="color: red;">△</span> 2. <span style="color: red;">△</span> 4.	A RELEASE E990389 - - - KABOT 1-11-00				CAD FILE D990388-A.dwg		SIZE DWG. NO. D D990388-A
DWG. NO.	DESCRIPTION	USED ON:	NEXT ASS'Y: D980174, D980175, D980176	REV	DESCRIPTION	DCN NUMBER	APPR'D	CHECK	DRWN	DATE	SCALE NTS SHEET 1 OF 1
REFERENCE DRAWINGS				ISSUE DESCRIPTION							