

Attometer Astrophysics

LIGO Status in 2007

Sam Waldman
Caltech

*on behalf of the LIGO Scientific Collaboration
DCC G070480-01*

*HEP2007: Manchester, UK
July 20, 2007*



Outline

- **Gravitational waves**
 - GR & GW
 - Interferometric detectors
- **LIGO fifth science run**
 - Sensitivities
 - Performance
 - Limitations
- **Future directions**
 - Enhanced LIGO
 - Advanced LIGO

Linearized GR

$$G_{\mu\nu} = 8\pi T_{\mu\nu}$$

$$g_{\mu\nu} = \eta_{\mu\nu} + h_{\mu\nu}$$

Minkowski metric = flat spacetime

$h_{\mu\nu} \ll 1$ = perturbations

plane waves propagate at c

$$h_{\mu\nu} = A_{\mu\nu} \exp(ik_{\alpha}x^{\alpha})$$

Two dynamic DOFs: polarizations

$$A_{+}, A_{\times}$$

Strain and Gauge

Locally Lorentz

Transverse Traceless



Induced acceleration

Induced strain



$$\frac{d^2 x}{dt^2} = \frac{1}{2} \left(\ddot{A}_+ x \hat{x} + \ddot{A}_\times y \hat{y} \right)$$

$$h = \frac{\delta l}{l}$$

A_+ :

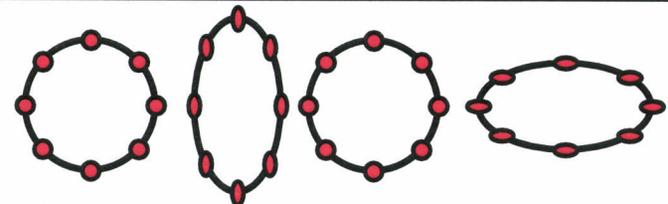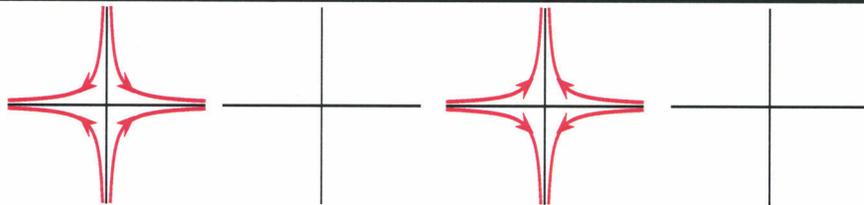


A_\times :

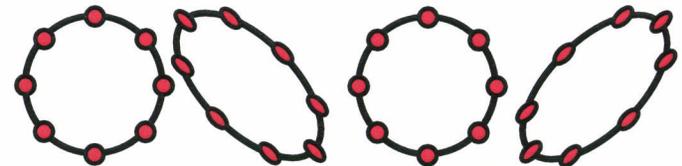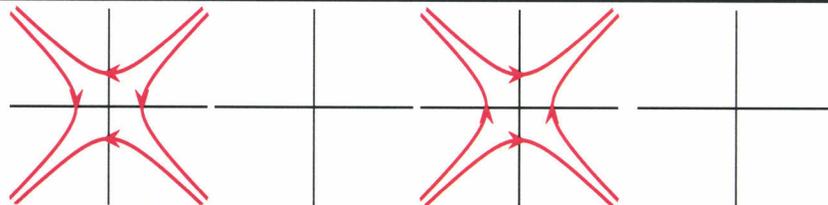

Generating GWs

- No monopoles: mass conservation
- No dipoles: momentum conservation
- Quadrupole moment: mass asymmetry

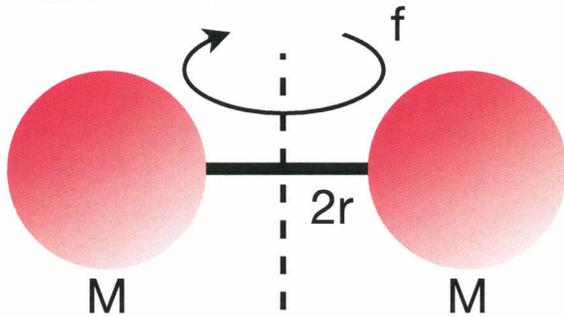


$$I_{xx} \approx 2Mr^2 \cos^2 2\pi ft$$

$$h_{\mu\nu} = \frac{2G}{Rc^4} \ddot{I}_{\mu\nu}$$

$$h_{xx} = \frac{32\pi^2 G}{Rc^4} Mr^2 f^2 \cos 4\pi ft$$

$$h = 2.6 \times 10^{-42} \frac{1}{[kg][m][Hz^2]}$$

Indirect GWs



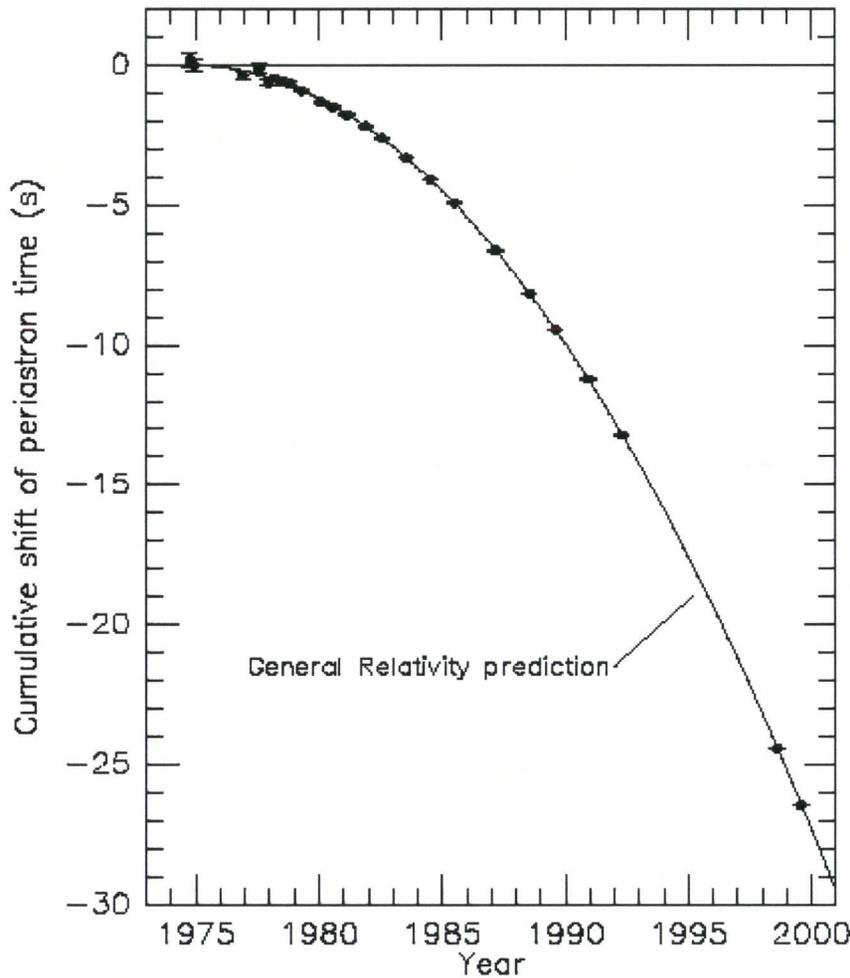


From J. H. Taylor and J. M. Weisberg, unpublished (2000)

- Hulse & Taylor
- Binary NS system
 - $r = 1.6 \times 10^9 \text{ m}$
 - $m_1 \sim m_2 \sim 1.4 M_{\odot}$
 - 8 hr orbit
 - 7.5 kpc
- GR predicts 3mm/orbit
- $h = 7.2 \times 10^{-23}$

Detecting GWs

- Two technologies:
 - Resonant bar detectors
 - Laser interferometers

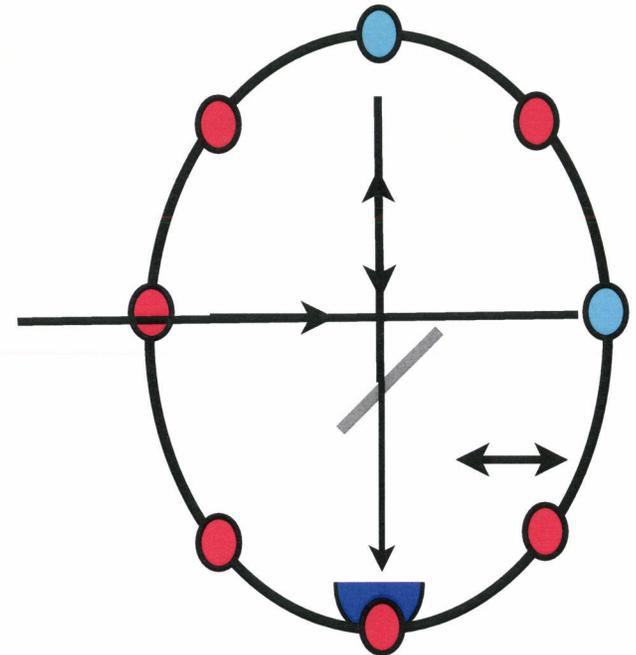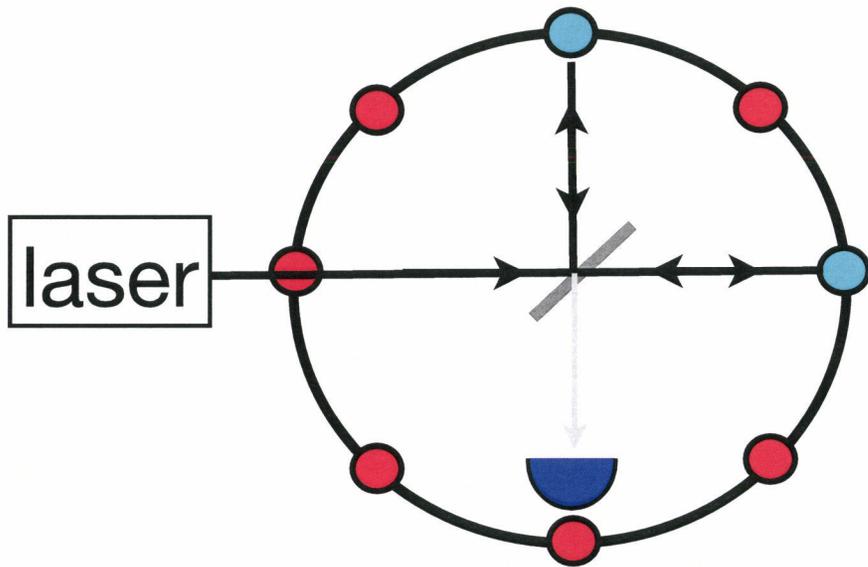

Michelson interferometer:

Null measurement

Matched antenna pattern

Cancels technical noise

$$P \propto \sin^2 \frac{\Delta x}{\lambda}$$

IFO statistics

- ~10 W, 1.064 μm Nd:YAG lasers
- ~1 km Michelson interferometers
- ~20 kW stored power
- 10 - 1,000 Hz bandwidth
- $\Delta x \sim 10^{-19}$ m/rHz length sensitivity
- $h \sim 10^{-23}$ /rHz strain sensitivity

Hurry up and wait

- Detectors are sensitive to GW *field amplitude*
- 1.4/1.4 M_{\odot} Binary Neutron Star inspiral is a standard candle
- Horizon Range:


$$R_0 \propto \left[\frac{M_{chirp}}{SNR} \int_{f_{min}}^{f_{max}} df H(f)^{-2} f^{-7/3} \right]^{1/2}$$

- Exposure:

$$N_{det} \propto T R_0^3$$



Interferometer Network

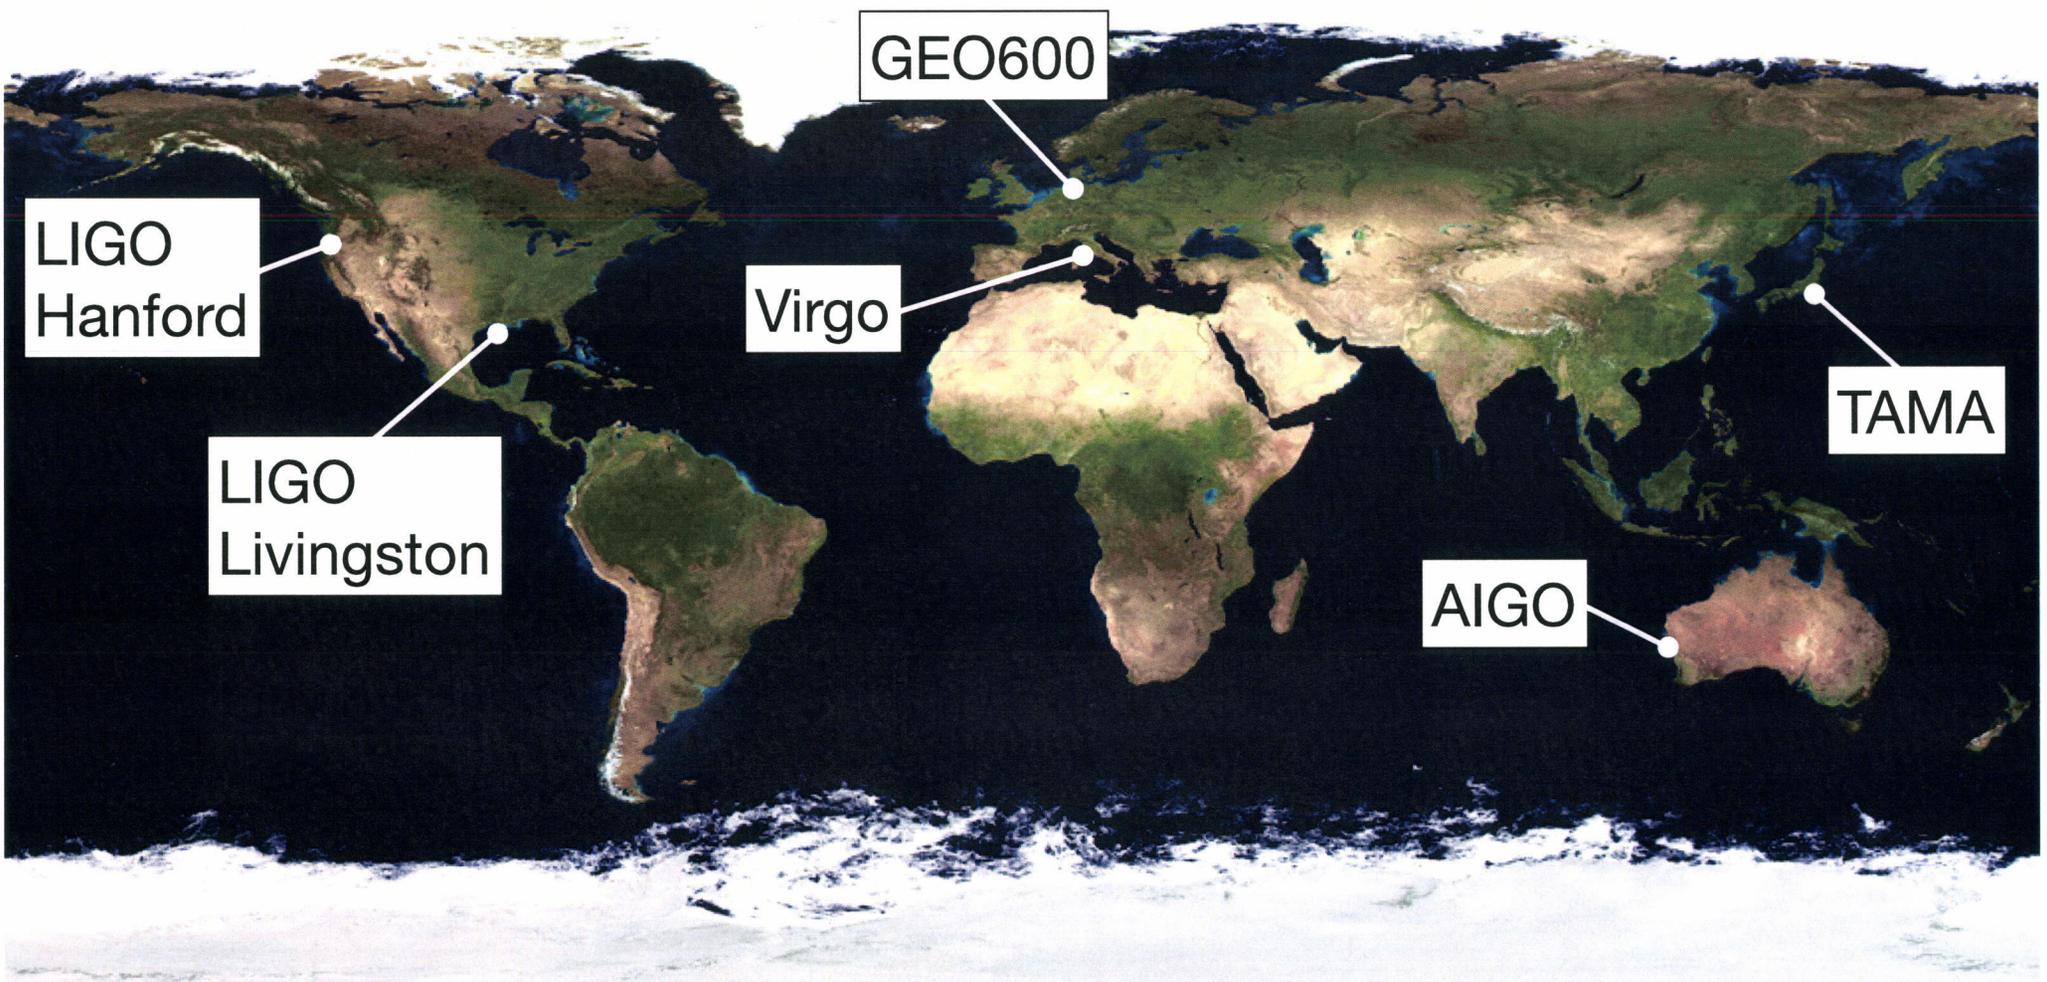

LIGO
Hanford

LIGO
Livingston

GEO600

Virgo

AIGO

TAMA





Outline

- Gravitational waves
 - GR & GW
 - Interferometric detectors
- **LIGO fifth science run**
 - Sensitivities
 - Performance
 - Limitations
- Future directions
 - Enhanced LIGO
 - Advanced LIGO



LIGO

LIGO detectors





LIGO Hanford:
4 km H1, 2 km H2



LIGO Livingston:
4 km L1

LIGO IFOs

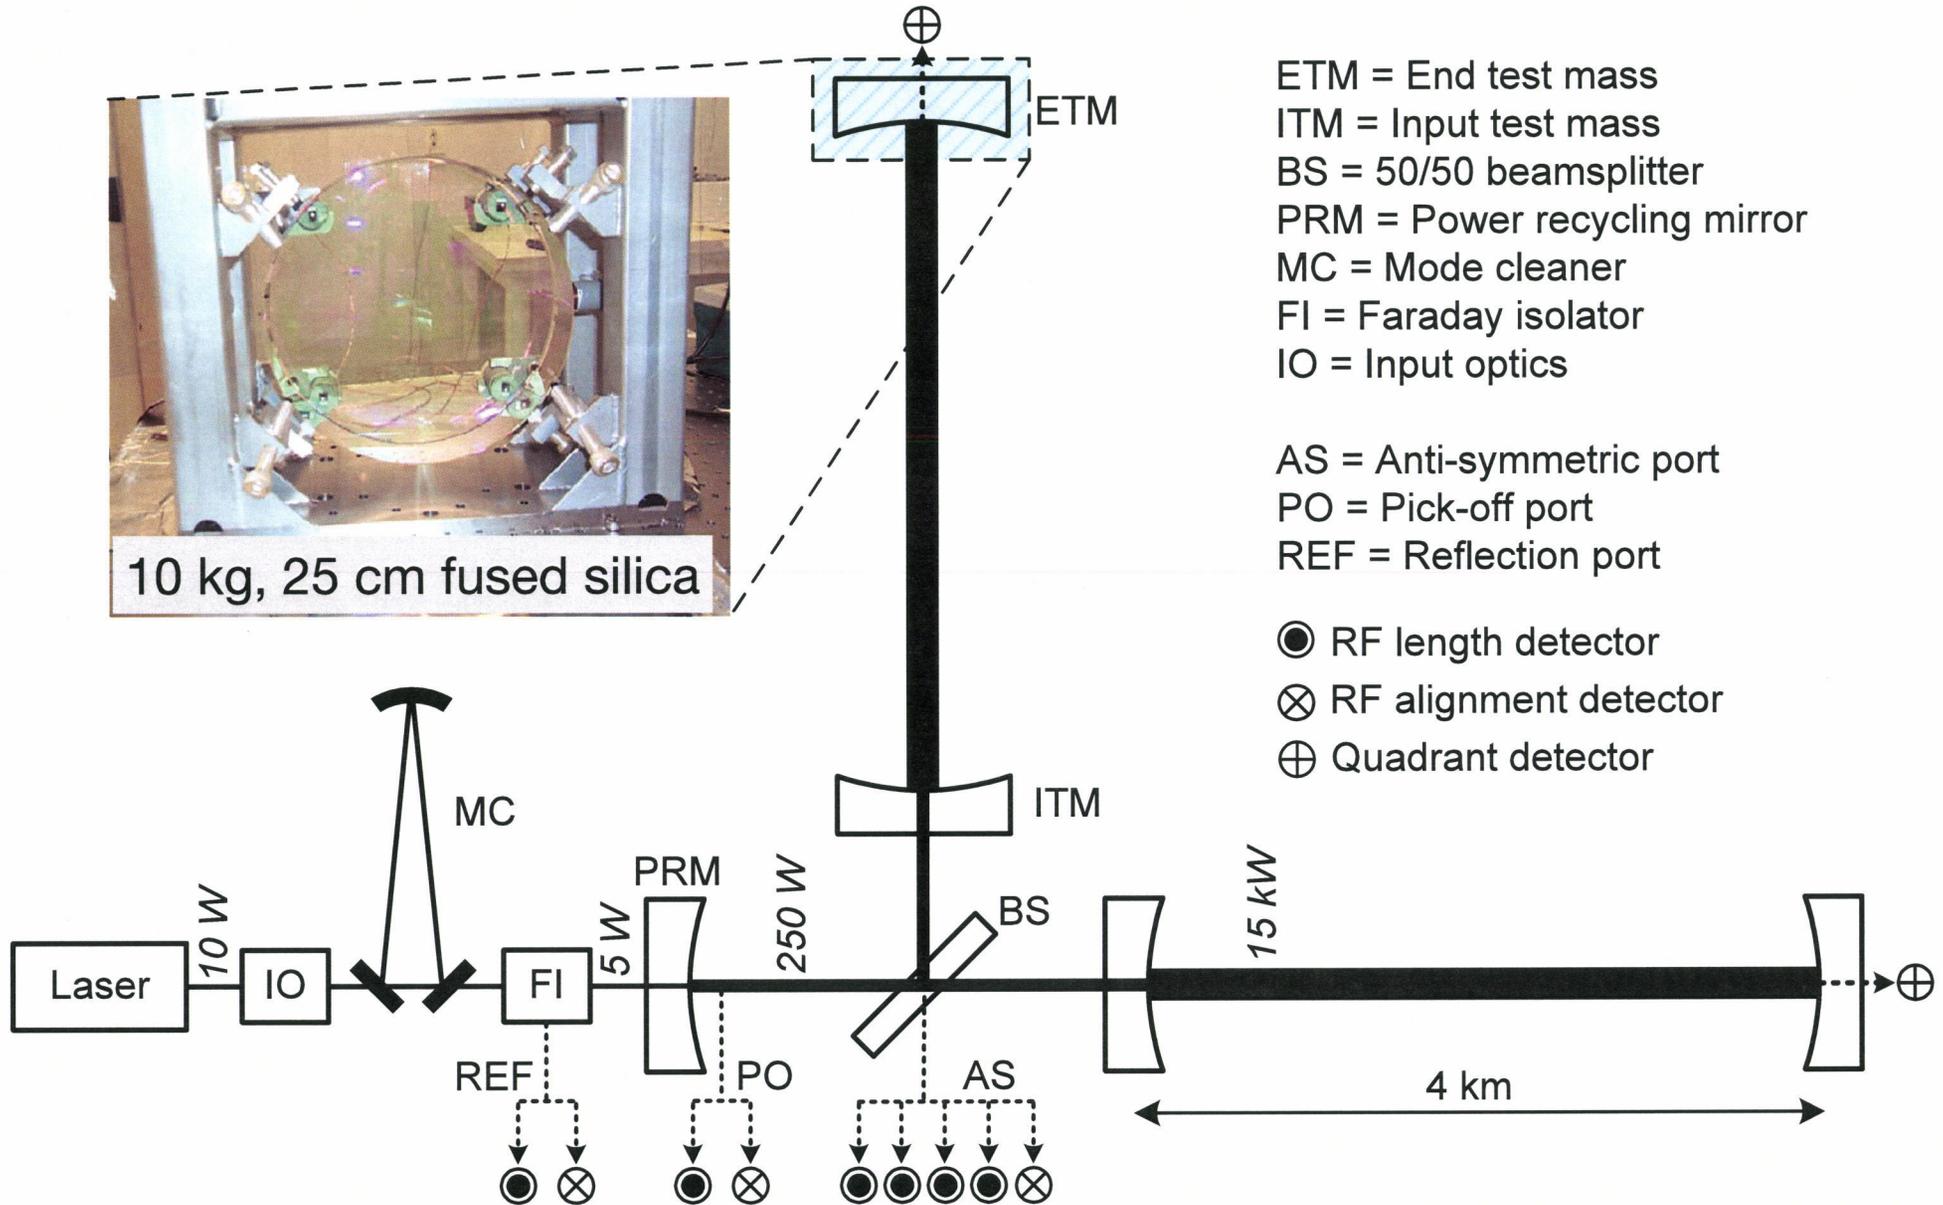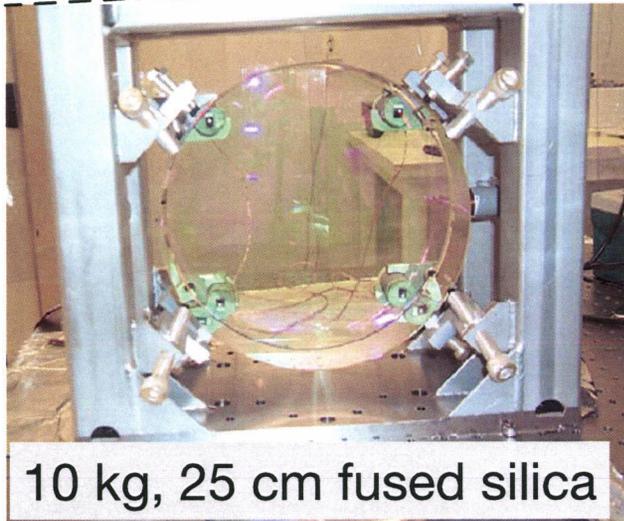


ETM = End test mass
 ITM = Input test mass
 BS = 50/50 beamsplitter
 PRM = Power recycling mirror
 MC = Mode cleaner
 FI = Faraday isolator
 IO = Input optics

AS = Anti-symmetric port
 PO = Pick-off port
 REF = Reflection port



● RF length detector
 ⊗ RF alignment detector
 ⊕ Quadrant detector



Strain sensitivity

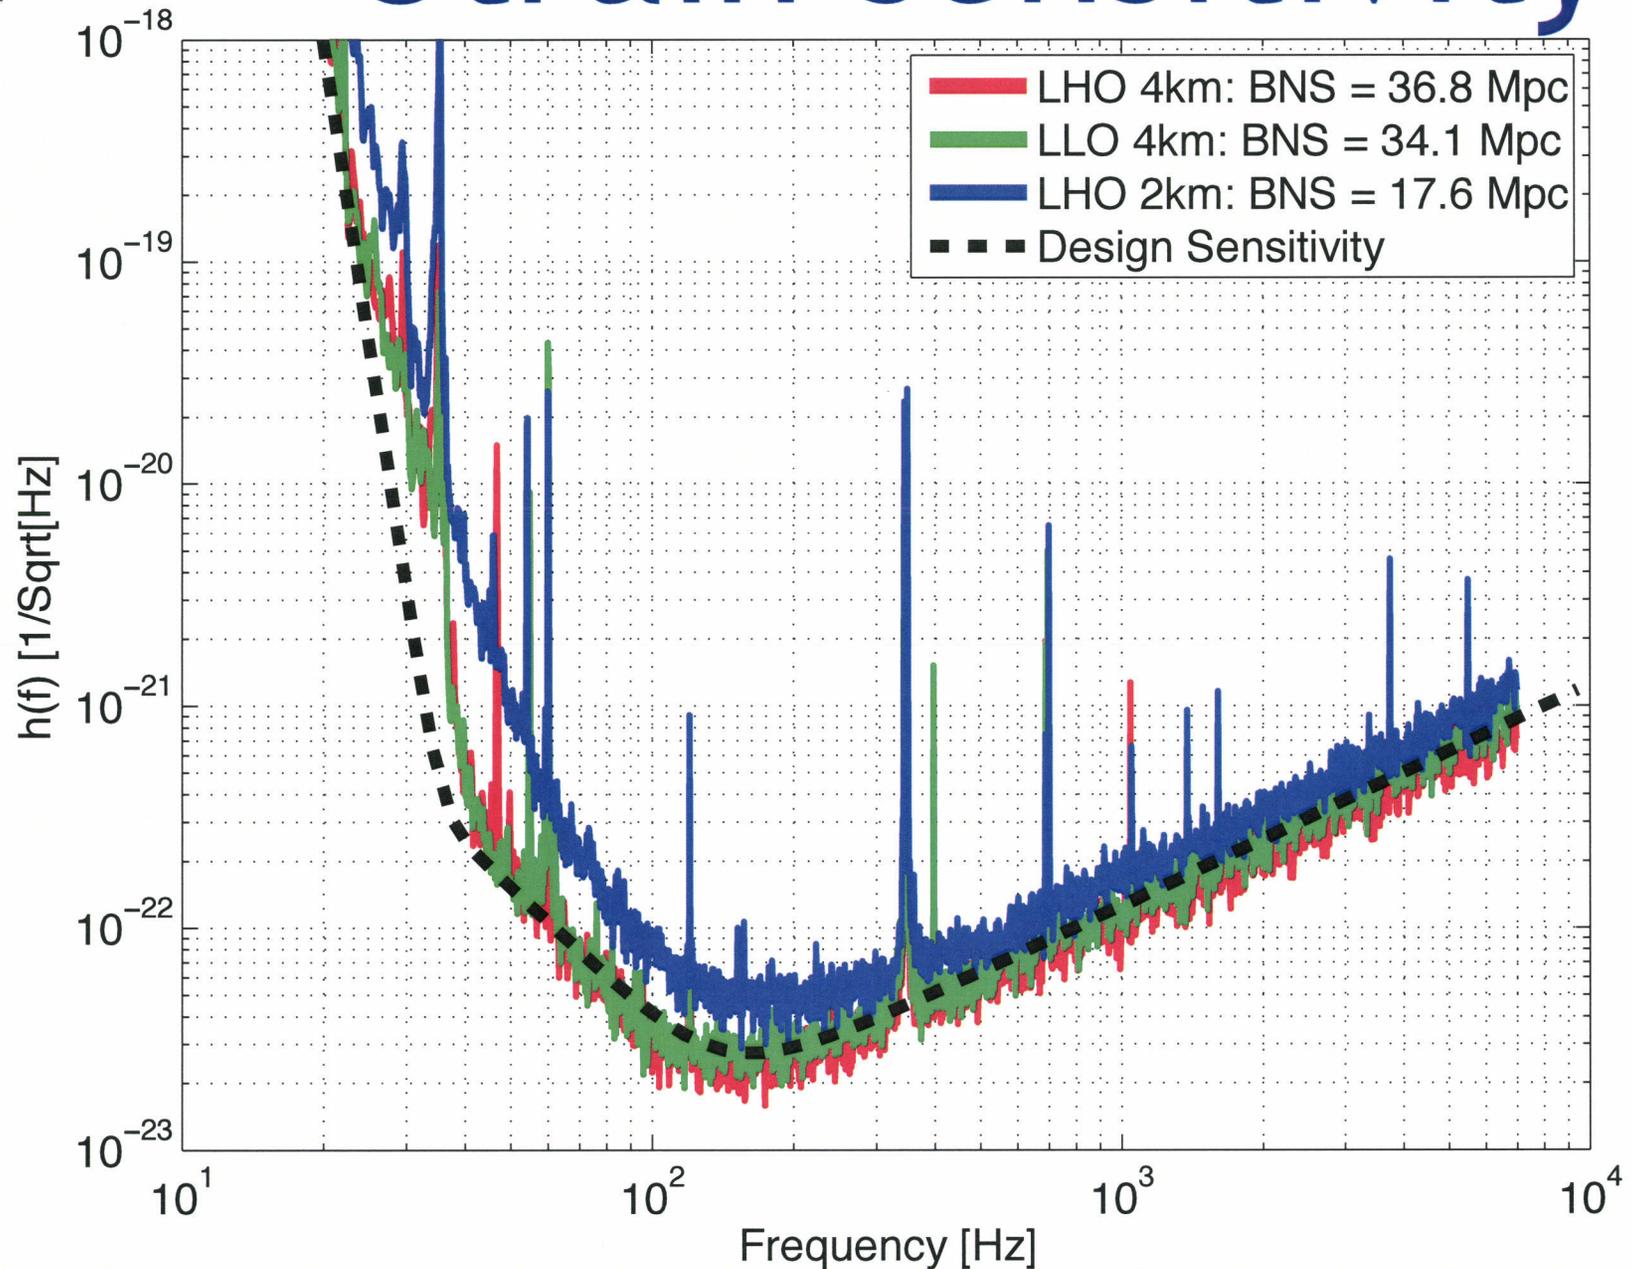

Fifth Science Run

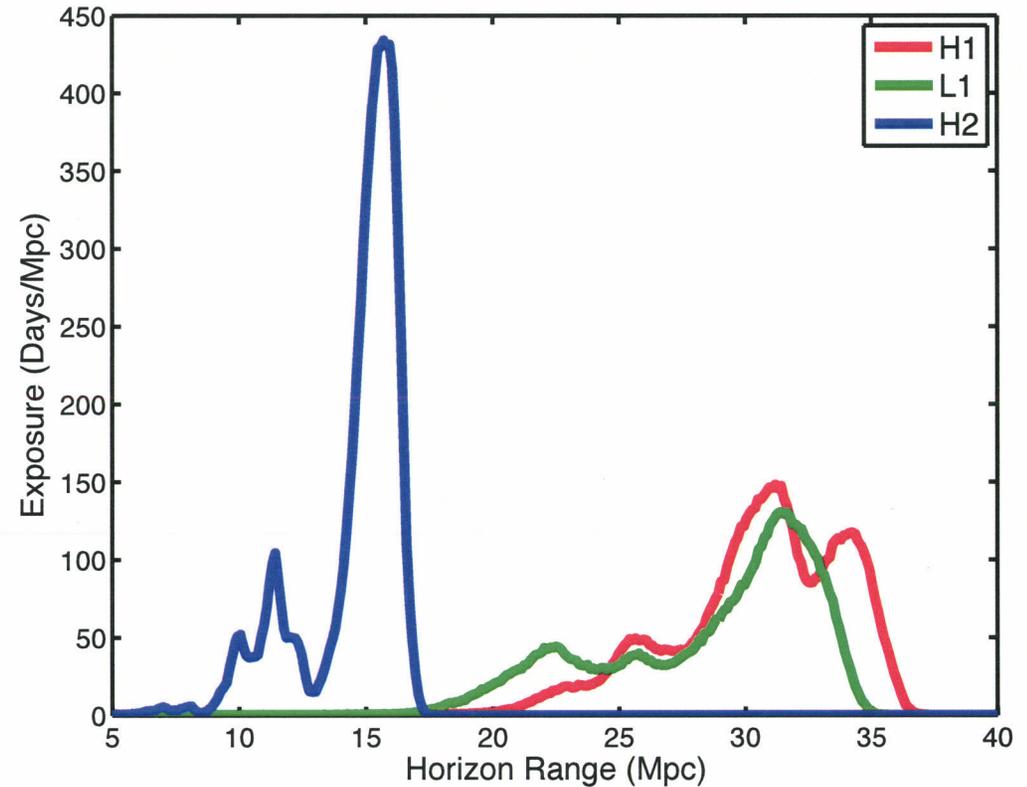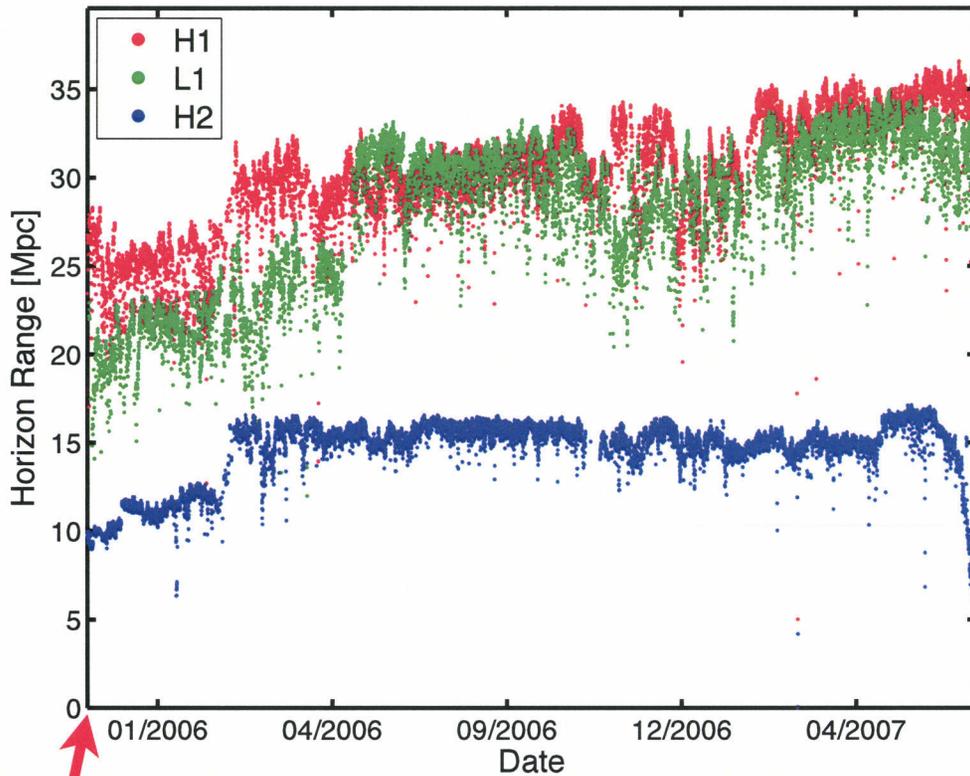


Nov. 14 2005

- 356 days dual site, 308 days triple coincidence*
- 64% to 77% science mode duty factor
- S5 scheduled end Fall 2007

* since June 26

Noise Budget

L1 Noise Contributions – Range: 33.5 (36.3) Mpc

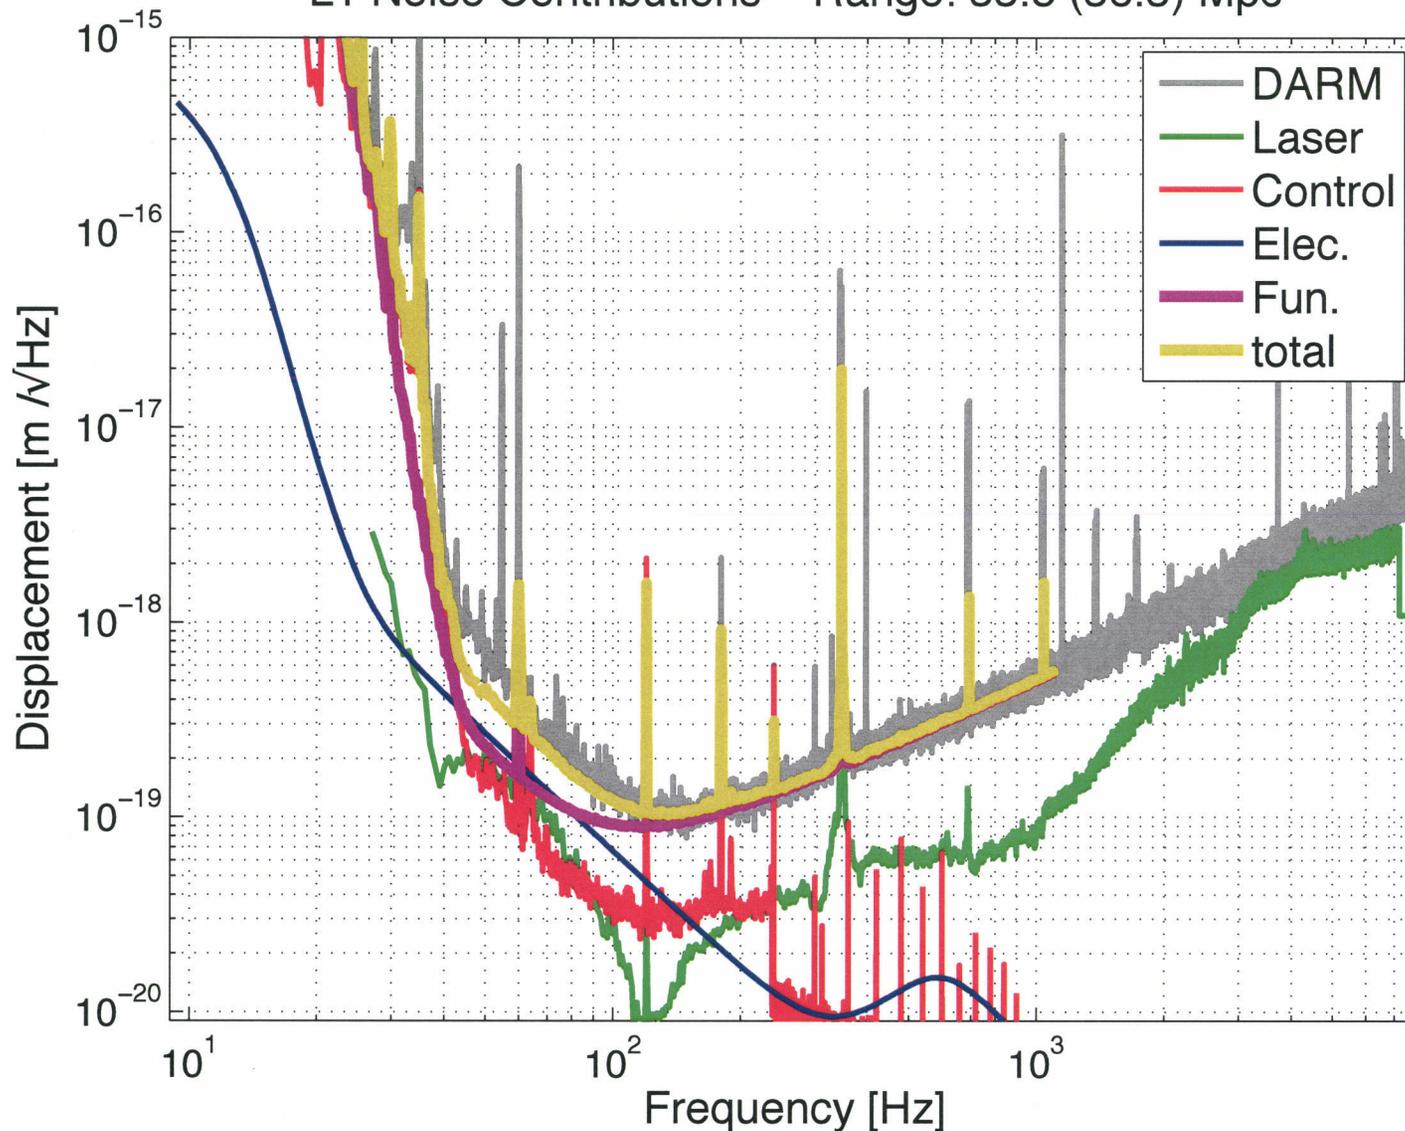

- **LASER** intensity, frequency & oscillator
- **CONTROL** MICH, PRC, WFS, OSEM, etc.
- **ELECTronic** ETM, ITM & BS bias & coil driver
- **FUNdamental**: shot, seismic, & thermal



GW detections


LIGO collaborates with GEO and Virgo on joint searches for GWs

- Coalescence of binary compact objects
 - *See P.Sutton's talk, next*
- Search for GW bursts (eg. supernovae)
 - *See P.Sutton's talk, next*
- GWs from (un)known pulsars
 - *See P.Sutton's talk, next*
- Stochastic background of GWs
 - *See P.Sutton's talk, next*

- Gravitational waves
 - GR & GW
 - Interferometric detectors
- LIGO fifth science run
 - Sensitivities
 - Performance
 - Limitations
- **Future directions**
 - Enhanced LIGO
 - Advanced LIGO


2007 thru ...

- Advanced LIGO planned start in 2008
- First IFO decommissioned in 2010
- Use Enhanced LIGO to
 - Increase exposure 10x
 - Minimize advLIGO risk

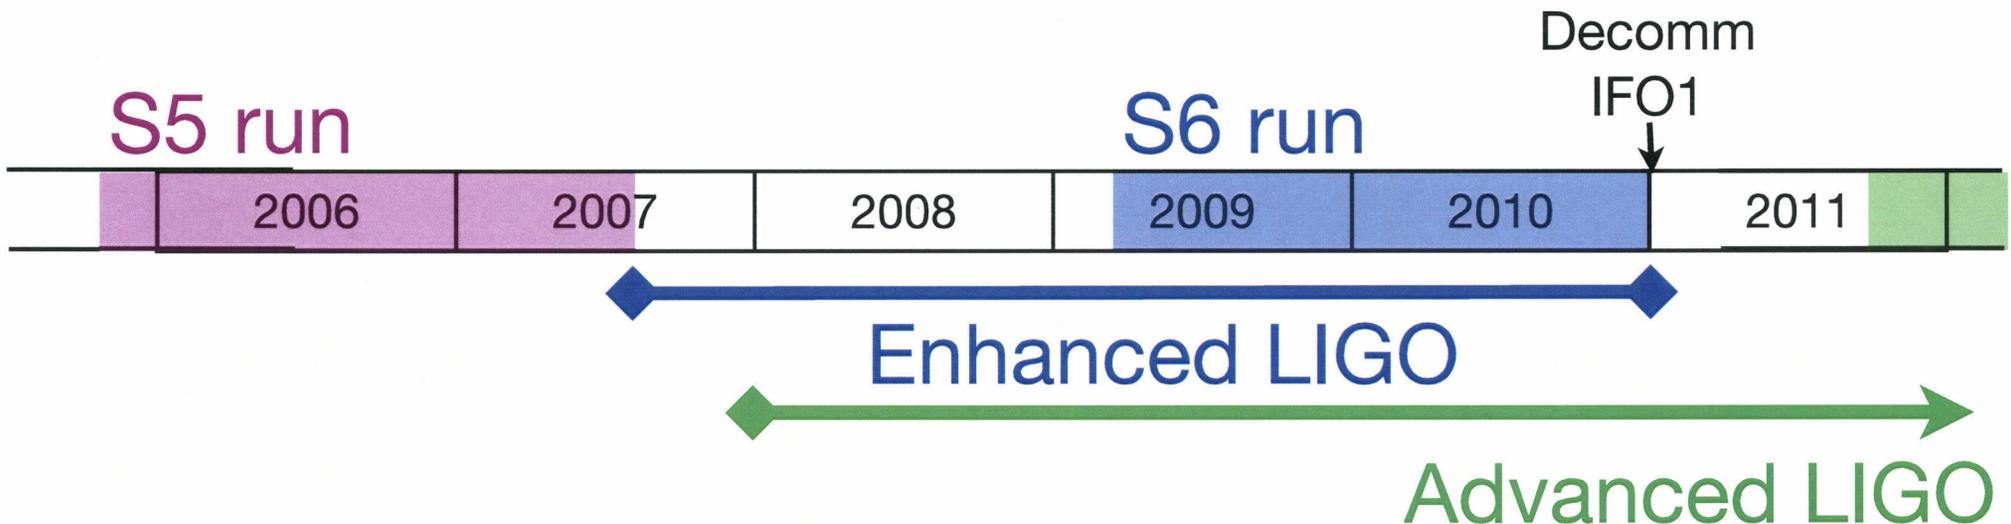

Enhanced LIGO

L1 Noise Contributions – Range: 33.5 (70.7) Mpc

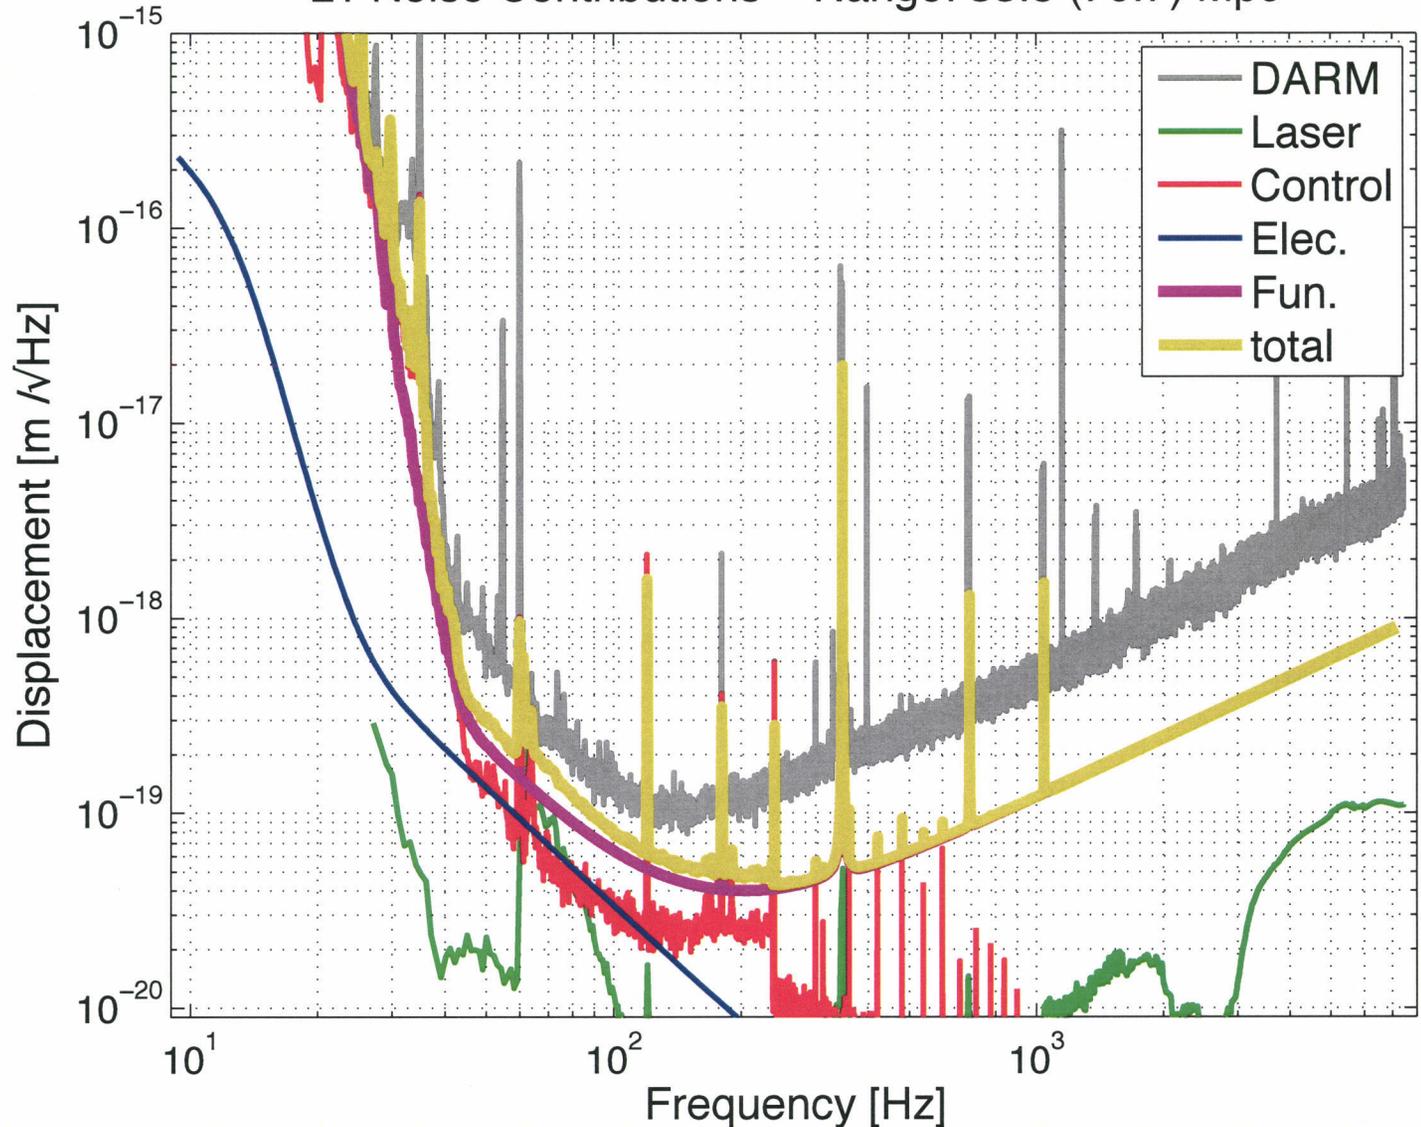


P_{Laser} to 35 W
(~2x, >100Hz)

RF to DC
(~2x, 100Hz)

Many “fixes”

Advanced LIGO

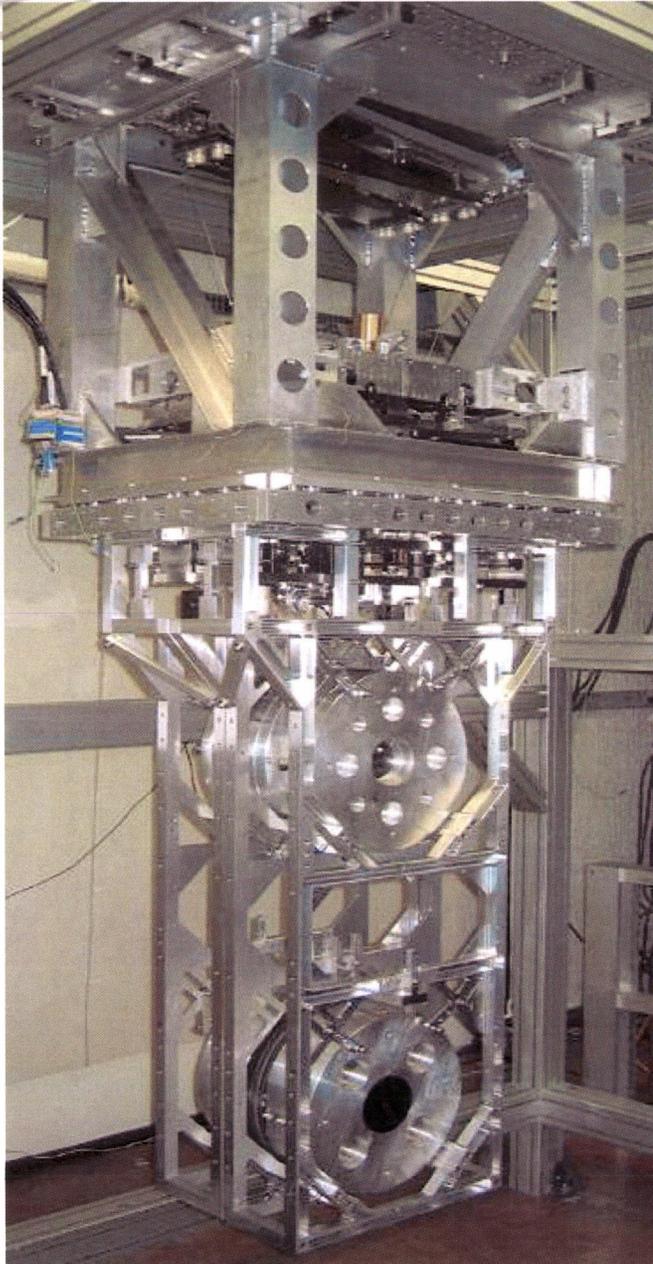

- Quadrupole pendulum, monolithic fused silica suspension
- Active seismic isolation
- Signal recycling
- P_{Laser} to 125 W, P_{arm} to 750 kW
- Extremely low loss coatings

Conclusion

S5 run ends
this fall

eLIGO will
increase
sensitivity 2x
for S6

advLIGO with
20x sensitivity
in 2010

