
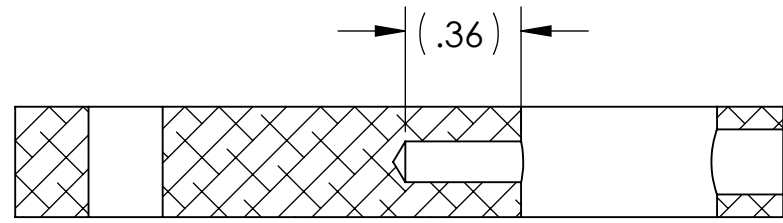





NOTES CONTINUED:

- 5. SCRIBE, ENGRAVE (A VIBRATORY TOOL MAY BE USED), LASER MARK OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX
- 6. APPROXIMATE WEIGHT = 0.05 LB.
- 7. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH. USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED. REFER TO LIGO-E0900364
- 8. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.
- 9. ALL MATERIAL IS TO BE VIRGIN MATERIAL (i.e. NO WELD REPAIRS, PLUGS OR RECYCLED MATERIAL). NO REPAIRS SHALL BE MADE UNLESS APPROVED IN ADVANCE, AND IN WRITING, BY LIGO LABORATORY. REFER TO LIGO-E0900364.

REV.	DATE	DCN #	DRAWING TREE #
v1	24-MAY-2012	E1101043-v2	E1101044-v2
-	-	-	-
-	-	-	-

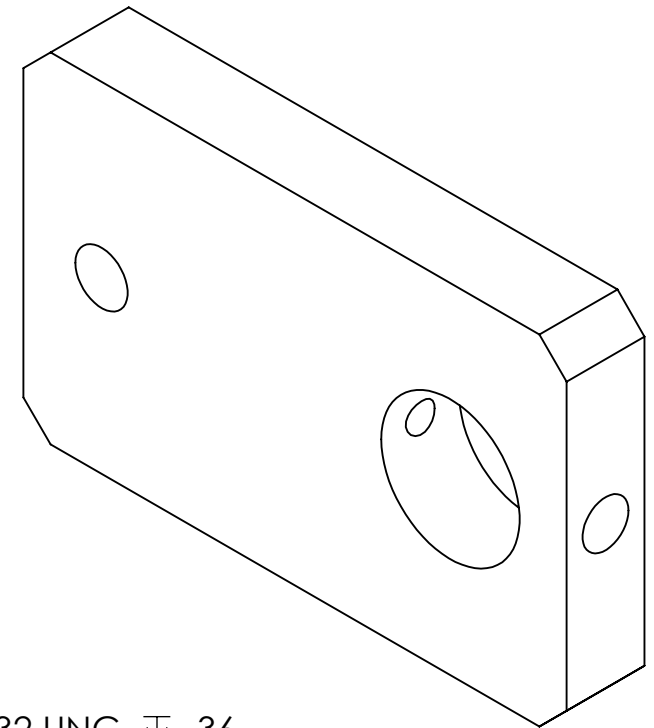

SECTION A-A

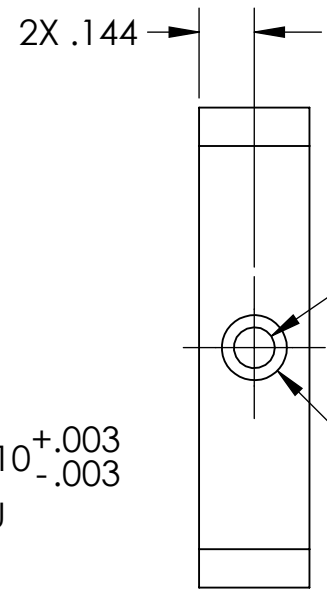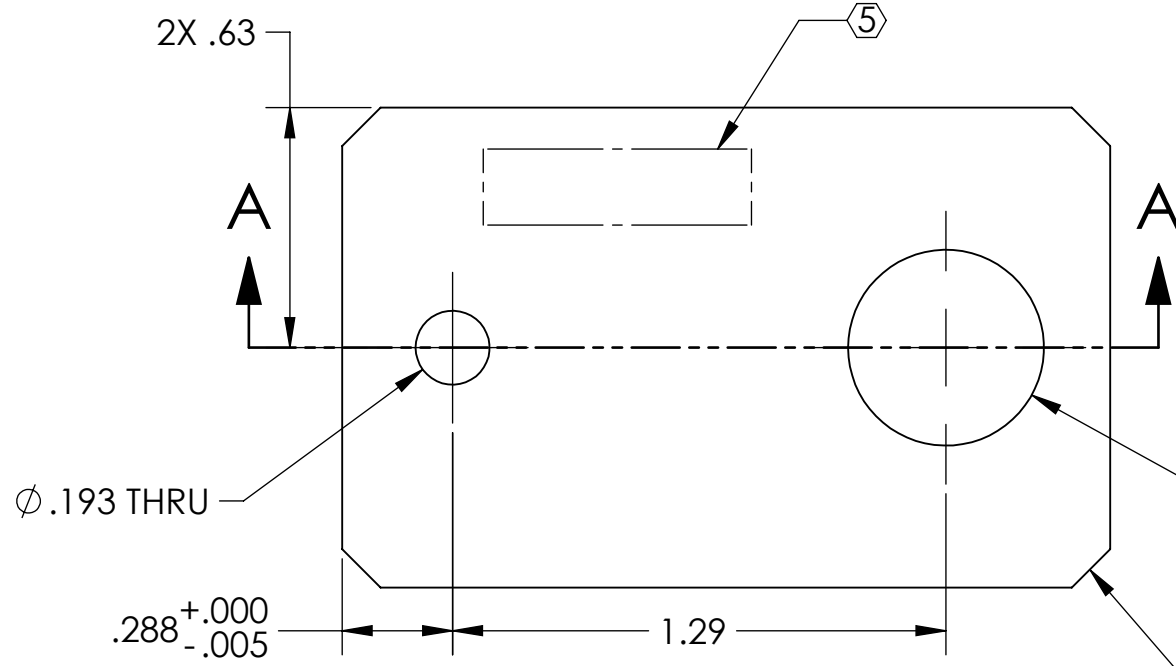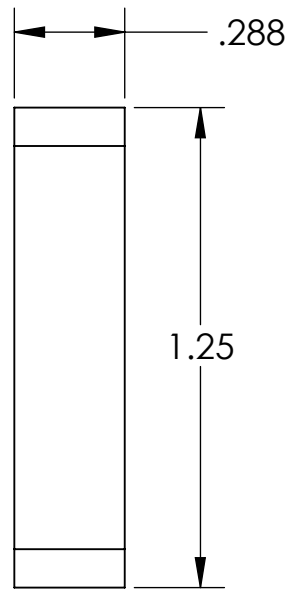

6-32 UNC ∇ .36 FROM TANGENT OF BORE FEATURE

ϕ .170 CLEARANCE FOR #6-32 THRU TO BORE FEATURE

ϕ .510^{+0.003}_{-.003} THRU

ϕ .193 THRU

.288^{+0.000}_{-.005}

1.29

2.00

4X .10 X 45° CHAMFER

D1200754_HANDLE GUSSET, αLIGO TCS STEERING MIRROR 1, H1-L1, PART PDM REV: X-004, DRAWING PDM REV: X-005

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN INCHES	
TOLERANCES: .XX ± .01 .XXX ± .005 ANGULAR ± °	
MATERIAL	6061 Alloy
FINISH	63 μinch

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY	
SYSTEM	ADVANCED LIGO
SUB-SYSTEM	AOS
NEXT ASSY	D1102029

PART NAME HANDLE GUSSET, αLIGO TCS SM1, H1-L1			
DESIGNER	M. JACOBSON 19-MAY-2012	SIZE	DWG. NO.
DRAFTER	M. JACOBSON 19-MAY-2012	B	D1200754
CHECKER	A. COLE 21-MAY-2012	SCALE	2:1
APPROVAL	T. VO 24-MAY-2012	PROJECTION:	ASME FIRST ANGLE
REV.	v1	SHEET 1 OF 1	