



Pin Connection:

Bottom View

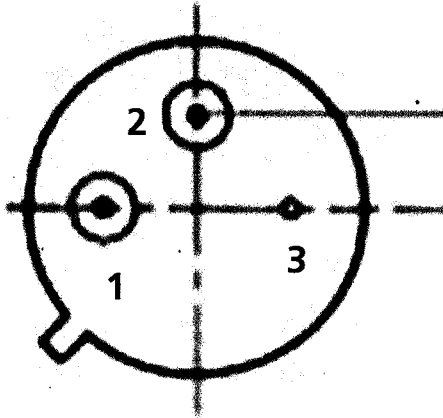

TOP View



Pin connection
(Bottom View):
PIN 1: ANODE
PIN 2: CATHODE
PIN 3: CASE GROUND

D10-BA0031028 / MIT

6 Stück	31028/MIT/01: InGaAs Photodiode 1064nm-10°p-Pol, 3mm, SOT9
10 Stück	31028/MIT/02: InGaAs Photodiode 1064nm-10°p-Pol, 500µm, SOT9
8 Stück	31028/MIT/03: InGaAs Photodiode 1064nm-10°p-Pol, 500µm, SOT9

Diodennummer	I in pA @ -5V	I in mA @ 1V	Durchmesser	Box Nr. Pos. Nr.
D1-15	1393	6,327	3000µm	31028/MIT/01_1
D1-20	1422	21,574	3000µm	31028/MIT/01_2
R1-03	1287	11,66	3000µm	31028/MIT/01_3
R2-03	1456	29,182	3000µm	31028/MIT/01_4
R2-04	1418	30,326	3000µm	31028/MIT/01_5
R2-06	1392	18,809	3000µm	31028/MIT/01_6
A2-21	114	0,48	500µm	31028/MIT/02_1
A2-22	121	0,506	500µm	31028/MIT/02_2
A2-23	114	2,766	500µm	31028/MIT/02_3
A2-24	118	1,222	500µm	31028/MIT/02_4
A2-25	118	2,084	500µm	31028/MIT/02_5
A2-26	128	0,625	500µm	31028/MIT/02_6
A2-28	107	1,047	500µm	31028/MIT/02_7
A2-29	111	0,673	500µm	31028/MIT/02_8
A2-30	108	0,63	500µm	31028/MIT/02_9
A2-31	111	0,946	500µm	31028/MIT/02_10
A2-32	104	1,07	500µm	31028/MIT/03_1
A2-33	101	1,263	500µm	31028/MIT/03_2
A2-34	96	1,047	500µm	31028/MIT/03_3
A2-35	99	0,827	500µm	31028/MIT/03_4
A2-37	94	1,163	500µm	31028/MIT/03_5
D2-01	99	0,161	500µm	31028/MIT/03_6
D2-02	98	0,424	500µm	31028/MIT/03_7
D2-04	93	0,835	500µm	31028/MIT/03_8