


BS 02 and 03 (designed for H1,L1).

HR coating transmittance at 0 deg AOI.

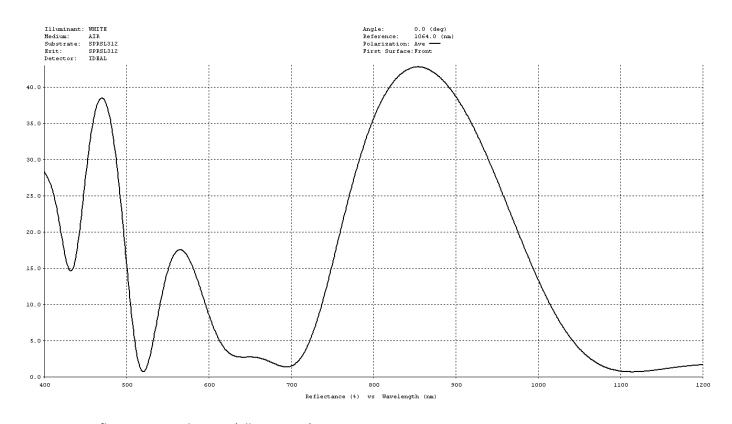

AR coating reflectance at 0 deg AOI (all BS optics)