



---

# Optimally Combining the Hanford Interferometer Strain Channels - II

Albert Lazzarini  
*LIGO Laboratory Caltech*

*S. Bose, P. Fritschel, M. McHugh, T. Regimbau,  
K. Reilly, J.D. Romano J.T. Whelan, S. Whitcomb,. B. Whiting*

*LSC Meeting  
LIGO Livingston Observatory  
18 March 2004*



# Motivation

(Review of Nov/Dec 2003 talks)

- The S1 stochastic analysis exposed environmental correlations between H1 (4 km) and H2 (2 km) interferometers
  - » Precluded use of H1-H2 for setting an upper limit on the stochastic background
  - » Made combining the H1-L1 and H2-L1 results potentially tricky due to the known H1-H2 correlations
    - H1-L1 and H2-L1 measurements made when the other interferometer was not operating may be added assuming no correlations between the measurements
      - see original Allen&Romano paper -- *PRD 59 (1999) 102001*
      - 2X measurements made during periods of 3X coincident operation *in general* cannot be combined in this way -- subject of this talk (**~73% of H1L1 for S2**)
      - see <http://www.ligo.caltech.edu/docs/T/T030250-13.pdf>
      - also submitted LSC editorial review for PRD publication
  - » This talk is an extension to Nov. LSC (G030553-01), GWDAA(G030636-01) presentations

LIGO-G040056-00-Z

LSC Meeting 2004.03.15-18

LIGO Scientific Collaboration

2



# LIGO Optimally using the H1-H2-L1 data for stochastic background measurements

- Idea:
  - » Take advantage of the geometrical alignment and co-location of the two Hanford interferometers
    - GW signature in two data streams *guaranteed* to be identically imprinted to high accuracy
    - Coherent, time-domain mixing of the two strain channels possible
      - (i) Form an *h* pseudo-channel that is an efficient estimator of GW strain (previous talks)
      - (ii) Also form a *null* channel that cancels GW signature (this talk)
        - Can be used to provide “off-source” background measurement
  - » Hanford *pseudodetector h* channel takes into account local instrumental and environmental correlations
  - » Then use the *pseudodetector* channels in the transcontinental cross-correlation measurement
  - » Naturally combines three interferometer datastreams to produce a *single* H-L estimate
- Assumes:
  - » No sources of broadband correlations between LIGO sites
    - Supported by S1, S2 long-term coherence measurements<sup>\*</sup>
      - \* Except for very narrow lines related to GPS timing and DAQS
  - Local H1-H2 coherence is dominated by environment, instrumental noise
    - Supported by character, magnitude of the H1H2 coherence measurements during S1, S2
    - Turns out that so long as H1 and H2 calibrations are *accurate* linearly melding H1 + H2 does not affect GW component

LIGO-G040056-00-Z



## Optimal estimate of strain in the presence of instrumental correlations at Hanford

- Form linear combination of two interferometer signals:

$$\tilde{s}_H(f) = \tilde{\alpha}(f)\tilde{s}_{H_1}(f) + (1 - \tilde{\alpha}(f))\tilde{s}_{H_2}(f)$$

- $s_H$  is an *unbiased* estimate of  $h$ :

$$\langle \tilde{h}^*(f) \tilde{s}_H(f') \rangle = P_\Omega(f)\delta(f - f')$$

- Require  $s_H$  to have *minimum variance*:

$$\langle \tilde{s}_H^*(f) \tilde{s}_H(f') \rangle = P_H(f)\delta(f - f')$$

$$\frac{\partial P_H(f)}{\partial \tilde{\alpha}(f)} = 0$$

- Solution**


$$\tilde{\alpha}(f) = \frac{P_{H_2}(f) - \rho_{H_1 H_2}(f)\sqrt{P_{H_1}(f)P_{H_2}(f)}}{P_{H_1}(f) + P_{H_2}(f) - (\rho_{H_1 H_2}(f) + \rho_{H_1 H_2}^*(f))\sqrt{P_{H_1}(f)P_{H_2}(f)}}$$

$$P_H(f) = \frac{P_{H_1}(f)P_{H_2}(f)(1 - \Gamma(f))}{P_{H_1}(f) + P_{H_2}(f) - (\rho_{H_1 H_2}(f) + \rho_{H_1 H_2}^*(f))\sqrt{P_{H_1}(f)P_{H_2}(f)}}$$

LIGO-G040056-00-Z



# Results from S2 representative spectra

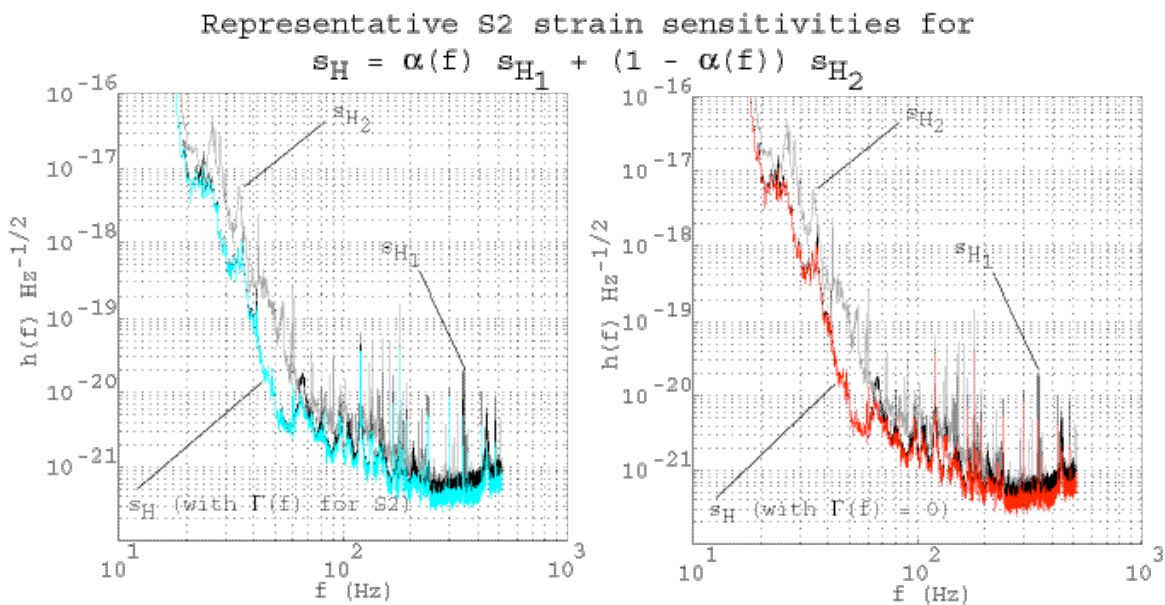

- Already for S2, the H1-H2 coherence is sufficiently low that the effect of  $\Gamma \rightarrow 0$  is very small
- The power of the technique is that it optimally combines two time series into a single series for Hanford
- Can show that if there are no correlations present, can also combine independent measurements according to their variances:

$$Y_{L_1 H} \rightarrow \frac{\sigma_{Y_{L_1 H_1}}^{-2} Y_{L_1 H_1} + \sigma_{Y_{L_1 H_2}}^{-2} Y_{L_1 H_2}}{\frac{1}{\sigma_{L_1 H_1}^2} + \frac{1}{\sigma_{L_1 H_2}^2}}$$

for  $\Gamma \rightarrow 0$



**NEW**

# Null GW channel derived from the two of Hanford strain channels

- Use  $s_H$  to cancel  $h$  in individual channels,  $s_{H1,2}$

$$\tilde{z}_{H_1}(f) = \tilde{s}_{H_1}(f) - \tilde{s}_H(f)$$

$$\tilde{z}_{H_2}(f) = \tilde{s}_{H_1}(f) - \tilde{s}_H(f)$$

$$\tilde{z}_{H_1}(f) = (1 - \tilde{\alpha}(f))[\tilde{n}_1(f) - \tilde{n}_2(f)]$$

$$\tilde{z}_{H_2}(f) = \tilde{\alpha}(f)[\tilde{n}_1(f) - \tilde{n}_2(f)]$$

$$\begin{aligned} \tilde{C}_z(f)\delta(f - f') &= \begin{bmatrix} \langle \tilde{z}_{H_1}^*(f)\tilde{z}_{H_1}(f') \rangle & \langle \tilde{z}_{H_1}^*(f)\tilde{z}_{H_2}(f') \rangle \\ \langle \tilde{z}_{H_2}^*(f)\tilde{z}_{H_1}(f') \rangle & \langle \tilde{z}_{H_2}^*(f)\tilde{z}_{H_2}(f') \rangle \end{bmatrix} \\ &= \langle (\tilde{n}_1^*(f) - \tilde{n}_2^*(f))(\tilde{n}_1(f') - \tilde{n}_2(f')) \rangle \begin{bmatrix} (1 - \tilde{\alpha}(f))(1 - \tilde{\alpha}^*(f)) & -\tilde{\alpha}(f)(1 - \tilde{\alpha}^*(f)) \\ -\tilde{\alpha}^*(f)(1 - \tilde{\alpha}(f)) & \tilde{\alpha}(f)\tilde{\alpha}^*(f) \end{bmatrix} \\ &= \begin{bmatrix} (1 - \tilde{\alpha}(f))(1 - \tilde{\alpha}^*(f)) & -\tilde{\alpha}(f)(1 - \tilde{\alpha}^*(f)) \\ -\tilde{\alpha}^*(f)(1 - \tilde{\alpha}(f)) & \tilde{\alpha}(f)\tilde{\alpha}^*(f) \end{bmatrix} \times \leftarrow \text{NO } P_\Omega \text{ dependence !} \\ &\quad \left( P_{H_1}(f) + P_{H_2}(f) - (P_{H_1H_2}(f) + P_{H_2H_1}(f)) \right) \delta(f - f') \end{aligned}$$



# LIGO Null GW channel derived from the two of Hanford strain channels (2)

- Diagonalization of  $C_z$  does not involve  $h$ 
  - »  $C_z$  derived from single vector,  $\{s_{H1}, s_{H2}\}$  -> one non zero eigenvalue (corresponds to power in signal  $z_H$ ):

$$P_{z_H}(f) = \left( P_{H_1}(f) + P_{H_2}(f) - (\rho_{H_1 H_2}(f) + \rho_{H_1 H_2}^*(f)) \sqrt{P_{H_1}(f) P_{H_2}(f)} \right) \times \left( 1 - \tilde{\alpha}^*(f) - \tilde{\alpha}(f) + 2\tilde{\alpha}^*(f)\tilde{\alpha}(f) \right)$$

- » Corresponding eigenvector:

$$\begin{aligned} \tilde{z}_H(f) &= -(\tilde{n}_{H_1}(f) - \tilde{n}_{H_2}(f)) \sqrt{1 - \tilde{\alpha}(f) - \tilde{\alpha}^*(f) + 2|\tilde{\alpha}(f)|^2} \\ &= -(\tilde{s}_{H_1}(f) - \tilde{s}_{H_2}(f)) \sqrt{1 - \tilde{\alpha}(f) - \tilde{\alpha}^*(f) + 2|\tilde{\alpha}(f)|^2}. \end{aligned}$$

- »  $z_H \propto [s_{H1} - s_{H2}] \times g(\alpha(f))$ 
  - filter function  $g$  reduces  $\text{Var}(z_H)$  below  $\text{Var}(s_{H1} - s_{H2})$



# Null GW channel derived from the two of Hanford strain channels (3)

- For  $\Gamma \rightarrow 0$ ,

$$\tilde{z}_H(f) = (s_{H_2}(f) - s_{H_1}(f)) \frac{\sqrt{P_{H_1}^2(f) + P_{H_2}^2(f)}}{P_{H_1}(f) + P_{H_2}(f)}$$

$$P_{z_H}(f) = \frac{P_{H_1}^2(f) + P_{H_2}^2(f)}{P_{H_1}(f) + P_{H_2}(f)} \leq P_{H_1}(f) + P_{H_2}(f)$$
$$\leq \max[P_{H_1}(f), P_{H_2}(f)]$$

*NOTE --  $P_{z_H}(f)$  is always less noisy than the noisier instrument*








# Results from S2 representative spectra

Representative S2 strain sensitivities for

$$z_H = (1 - \alpha(f) - \alpha^*(f) + 2|\alpha(f)|^2)^{1/2} (s_{H_2} - s_{H_1})$$

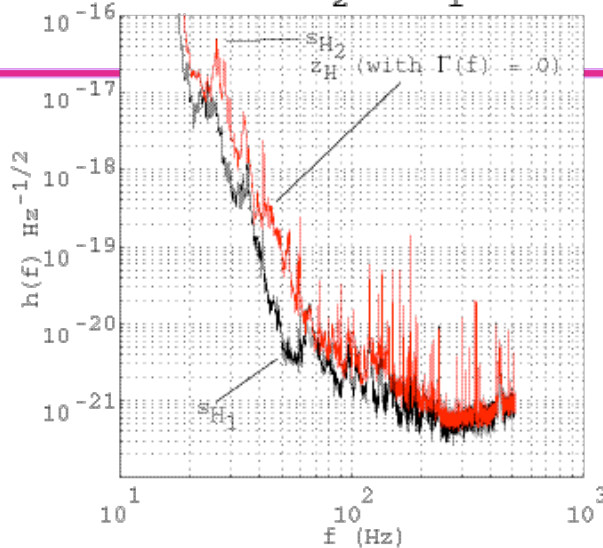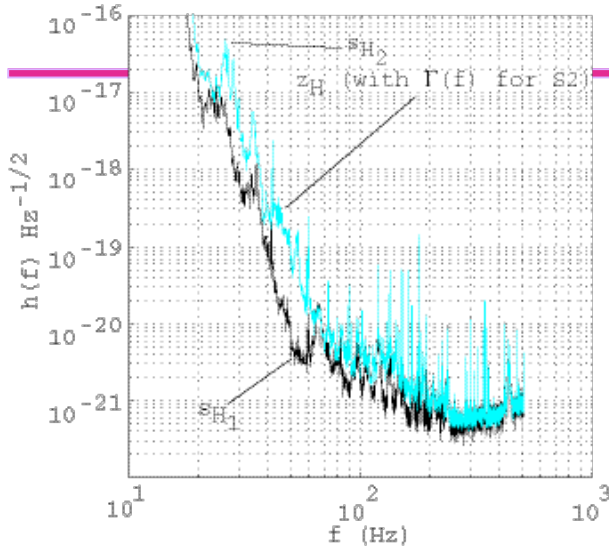


Run-averaged coherence between H1 and H2 for the S2 science run

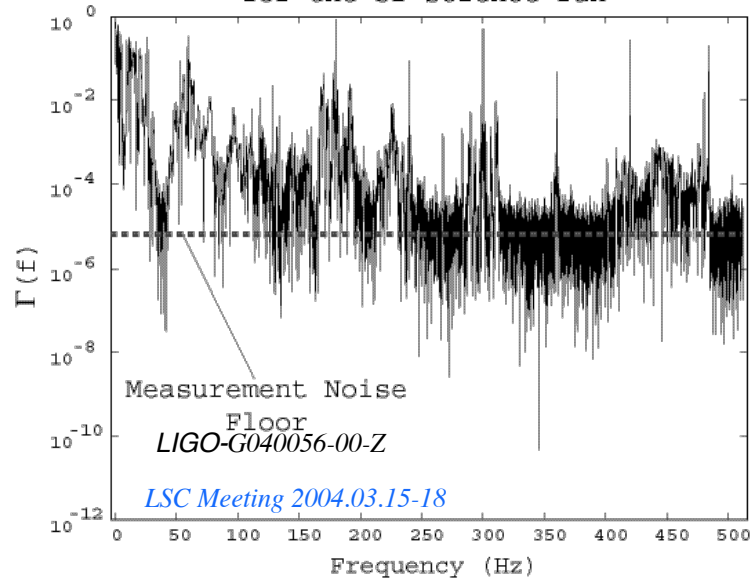

for  $\Gamma \rightarrow 0$

$$\frac{Y_{L_1 z}}{\sigma_{L_1 z}} \rightarrow \frac{Y_{L_1 H_2} - Y_{L_1 H_1}}{\sqrt{\sigma_{Y_{L_1 H_1}}^2 + \sigma_{Y_{L_1 H_2}}^2}}$$

Geometric relationship among signals

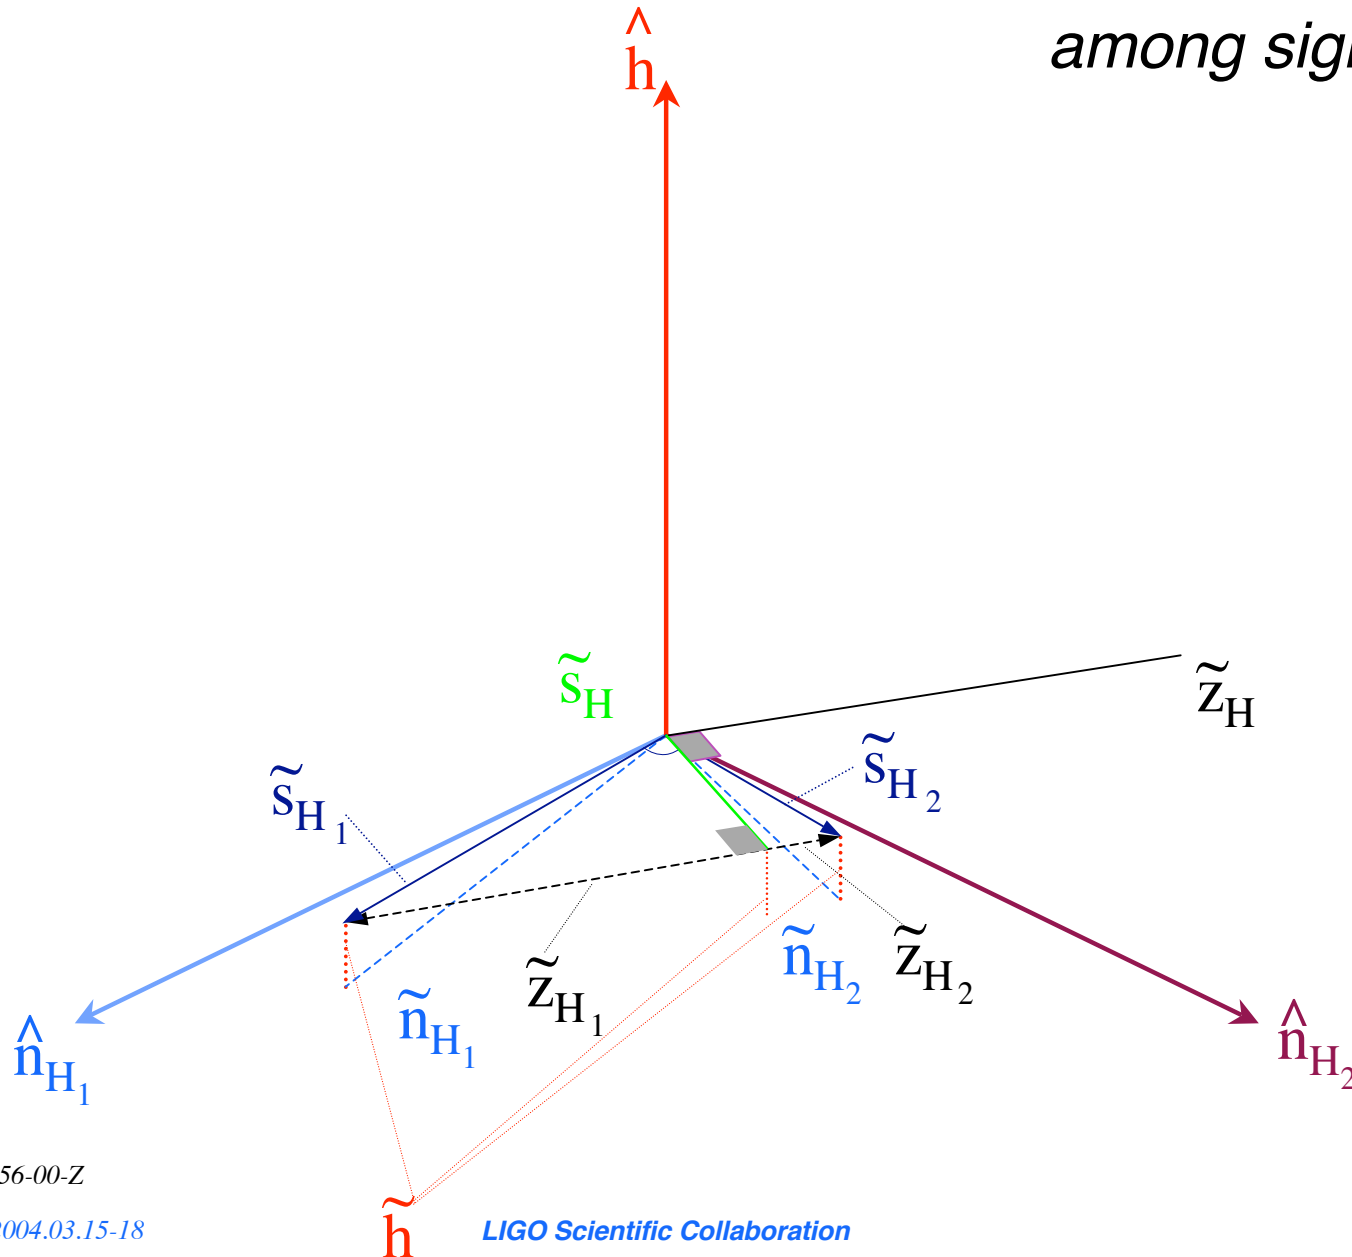



# Summary (1)

---

- It is possible to use the co-located/co-aligned H1/H2 interferometers in a fundamentally different manner than was done for S1
  - » We are a little smarter ...
- An optimal estimate of  $h$  can be obtained that is robust against local instrumental correlations
  - » Allows a consistent manner of combining H1, H2, L1 datastreams to obtain a single best upper limit on  $\Omega$
  - » Reduces to standard expression for uncorrelated measurements



## Summary (2)

- There exists a **dual** to  $s_H$ -- null channel --  $z_H$  **designed** not to contain GW signature
  - » Can be used for “off-source” null measurement as a calibration for “on-source” measurement
    - Analogous to rotated ALLEGRO+LLO technique
  - » **Use of null channel can be generalized to other classes of searches**
    - e.g., run inspiral search over  $z_H$  -> if anything is seen, it can be used to veto same search over  $s_H$
- Technique requires reasonably precise **relative** knowledge of H1, H2 calibrations
  - » Relative calibration errors between  $s_{H1}$ ,  $s_{H2}$  will tend to average out in  $s_H$
  - » Will tend to add in  $z_H$ 
    - Leads to **leakage** of  $h$  into  $z_H$
    - Relative calibration error +/-  $\epsilon(f)$  leakage into  $z_H$ :  
 $\delta h(f) \sim 2 \epsilon(f) h(f)$  in **amplitude** and  $\delta P_{\Omega}(f) \sim 4 |\epsilon(f)|^2 P_{\Omega}(f)$  in **power**
  - » Event at threshold at  $\rho_*$  in  $s_H$  ->  $2|\epsilon| \rho_*$  in  $z_H$ 
    - For reasonable  $\epsilon$  and  $\rho_*$ , signal in  $z_H$  will be at or below threshold.

# Summary (3)

## Application to S1 results

Summary of combined H1L1 and H2L1 S1 results

Quantity	Value	Quantity	Value
$\Omega_{L_1H_1}$	31.6	$\sigma_{L_1H_1}$	17.8
$\Omega_{L_1H_2}$	0.16	$\sigma_{L_1H_2}$	18.2
$\Omega_{LH} = \left( \frac{\sigma_{Y_{L_1H_1}}^{-2} \Omega_{L_1H_1} + \sigma_{Y_{L_1H_2}}^{-2} \Omega_{L_1H_2}}{\frac{1}{\sigma_{L_1H_1}^2} + \frac{1}{\sigma_{L_1H_2}^2}} \right)$	16.1	$\sigma_{LH} = \frac{1}{\sqrt{\frac{1}{\sigma_{L_1H_1}^2} + \frac{1}{\sigma_{L_1H_2}^2}}}$	12.7
Symmetric Bound	$-4.9 \leq \Omega_{LH} \leq 37.2$		90% CL
Upper Limit	$\Omega_{LH} < 32.4$		90% CL
Difference, $\Delta\Omega = (\Omega_{L_1H_2} - \Omega_{L_1H_1})$	-31.4	$\sigma_{\Delta} = \sqrt{\sigma_{L_1H_1}^2 + \sigma_{L_1H_2}^2}$	25.5
$\xi_{\Omega} = \frac{\Delta\Omega}{\sigma_{\Delta}}$	-1.23	Prob $\xi \leq  \xi_{\Omega} $	0.78

