
NOTES CONTINUED: REV. 10. ALL HELT-COIL INSERTS TO BE INSTALLED BY LIGO PERSON
AFTER DELIVERY OF FINISHED PARTS. USE NITRONIC 60 TH (5) SCRIBE, ENGRAVE, OR MECHANICALLY STAMP Scribe, Engrave, Or Niechanically Stand (NO Inks or Dyes) Drawing Part Number and Revision on Noted Surface Followed on The Next Line by a three digit Serial Number. Serial 11. ALL MATERIAL IS TO BE VIRGIN MATERIAL (i.e. NO WELD REPAIRS, PLUGS OR RECYCLED MATERIAL), NO REPAIRS SHALL BE MADE UNLESS APPROVED IN ADVANCE, AND IN WRITING, BY LIGO LABORATORY. REFER TO LIGO-E0900364. NEAL LINE BY A THREE DISTI SERVAL NUMBER'S SENAL NUMBER'S START AT OIL FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07 HIGH CHARACTER'S. EXAMPLE: DXXXXXXX-VY, S/N 001.


VIBRATORY TOOL MAY BE USED. 12. SURFACE FINISH TO BE AS-PROCESSED FROM MILL/SUPPLIER, FREE FROM SCRATCHES OR GOUGES. 13. PART WILL BE PORCELAIN COATED PER LIGO SPECIFICATION E1000083
AFTER FABRICATION. THE INDICATED LIGHES WILL BE MASKED PRIOR TO
PORCELAIN COALING FOR APPROXIMATELY 2.5-3X HOLE DIAMETER
GENTERED ON BOTH SIDES OF THE HOLE. APPROXIMATE WEIGHT = X.XXX LB. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH, USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED. REFER TO LIGO-E0900364 . ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364. PLAIN PEEK 15. BEND RADIUS: UNLESS OTHERWISE NOTED, THE BEND RADIUS SHOULD BE THE MINIMUM REQUIRED TO FORM WITHOUT CRACKING OR REQUIRING ADDITIONAL WORK WHEN FORMING. IN PARTICULAR IF SHEET METAL IS TO BE PORCELAIN COATED, THE BEND RADIUS SHALL BE A MINIMUM OF .12* OUTSIDE RADIUS OF BEND UNLESS OTHERWISE NOTED. ALL HELI-COIL HOLES TO BE PREPARED ACCORDING TO EMHART HELI-COIL PRODUCT CATALOG, HG2000, REV. 4 CONNECTOR CONNECTOR NOTES 9, 10, 13 and 14 DO NOT APPLY TO THIS PART J1 and J2 1.600in[40.64mm] NO MOUNTING FLANGE (EARS) VENT HOLE Ø 0.125 FILLISTER HEAD STAINLESS STEEL MACHINE SCREW x4 LOCATIONS PIN 25 -PLAIN PIN 1 #4-40 x 0.305" HEX SOCKET HEAD (1/16") STAINLESS STEEL VENTED JACKSCREW x 2 LOCATIONS \emptyset 0.315in[8mm] \emptyset 0.275in[6.99mm] 0.109in[2.77mm] \emptyset 0.225in $[5.72 {\rm mm}]$ 0.497in[12.62mm] 0.112in[2.84mm 1.675in 42.56mm 0.050in 1.27mm PEEK OVERBRAID COPPER BRAID 1.852in 47.04mm 0.325in 8.26mm 1 CONDUCTOR (SHIELD) 2.165in 54.99mm 1.673in 42.49mm -25 CONDUCTOR 28 AWG 12 TWISTED PAIR + 1 WIRE

ITEM NO.	PART NUMBER	PART NUMBER DESCRIPTION		LENGTH *
1	TICOR #	DB25 FEMALE CONNECTOR (J1 & J2) FOR UHV (PEEK)		
2	(TS0148-25C020BS1-225) OR EQUIVALENT	DB25 CONNECTOR BACKSHELL (NO EARS) FOR UHV (STAINLESS)	2	
3	C1	25 COND. (12 TW PAIR + 1 WIRE + SHIELD) CABLE WITH ④ COPPER BRAID (SHIELD) AND ⑤ PEEK OVERBRAID	1	
4	CONTINENTAL PART #24x3x40BC	COPPER BRAID - CONTINENTAL CORDAGE PART #24x3x40BC	1	110 in.
(5)	#6759	PEEK BRAID - PART #6759 MANUFACTURED WITH ZEUS 0.016" BLACK PEEK DRAWN MONOFILAMENT	1	
6	GLENAIR # 600-052 or BAND-IT # A10086	GLENAIR #600-052 STANDARD BRAID CLAMP or BAND-IT PART # A10086 (0.240" WIDE) ("BAG OF 100" #A10089)	2	

* NOTE: USE WHATEVER LENGTH IS NECESSARY FOR THE INTERNAL WIRING OF THE CONNECTORS AND STRIP LENGTH TO ACHIEVE THE CORRECT OVERALL LENGTHS.





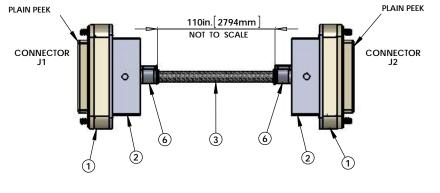

V25A-110 CABLE ASSEMBLY CIRCUIT SUMMARY V-DB25 F/S1-110-DB25 F/S1								
CABLE NAME	COND WIRE ID	TWISTED PAIR	LENGTH	FROM	то			
V25A-110	25 COND. CABLE	(12 TOTAL)	110 in.	CONN. J1	CONN. J			
	W1	SHIELD	110 in	PIN 1, SHELL	PIN 1, SHELL			
	W2	TP-1	110 in	PIN 2	PIN 2			
	W14		110 in	PIN 14	PIN 14			
	W3	TP-2	110 in	PIN 3	PIN 3			
	W15		110 in	PIN 15	PIN 15			
	W4	TP-3	110 in	PIN 4	PIN 4			
	W16		110 in	PIN 16	PIN 16			
	W5	TP-4	100 in	PIN 5	PIN 5			
	W17	IP-4	110 in	PIN 17	PIN 17			
	W6	TP-5	110 in	PIN 6	PIN 6			
	W18		110 in	PIN 18	PIN 18			
	W7	TP-6	110 in	PIN 7	PIN 7			
	W19		110 in	PIN 19	PIN 19			
	W8	TP-7	110 in	PIN 8	PIN 8			
	W20		100 in	PIN 20	PIN 20			
	W9	TP-8	110 in	PIN 9	PIN 9			
	W21		110 in	PIN 21	PIN 21			
	W10	TP-9	110 in	PIN 10	PIN 10			
	W22		110 in	PIN 22	PIN 22			
	W11	TP-10	110 in	PIN 11	PIN 11			
	W23		110 in	PIN 23	PIN 23			
	W12	TP-11	110 in	PIN 12	PIN 12			
	W24		110 in	PIN 24	PIN 24			
	W13	TP-12	110 in	PIN 13	PIN 13			
	W25		110 in	PIN 25	PIN 25			

ADDITIONAL LENGTH AS NECESSARY FOR THE INTERNAL WIRING OF THE CONNECTORS AND STRIP

V-[V-DB25 F/S1-110-DB25 F/S1						
STA	STANDARD USE FOR THIS CABLE						
SUBSYSTEM	AIR/VAC	STANDARD USE					
SEI	IN-VAC	FROM FLANGE TO TRILLIUM PODS					

			SUBSYSTEM	AIR/VAC	STANDARD USE	
			SEI	IN-VAC	FROM FLANGE TO TRILLIUM P	PODS
			351	117 7710		
	NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)	2000		PART NAME		
ONS ARE IN	INTERPRET DRAWING PER ASME Y14.5-1994. REMOVE ALL SHARP EDGES, 005-015. FOR MACHINED PARTS. ROUND ALL EDGES APPROXIMATLEY R.02 FOR SHEET METAL PARTS.	LIGO MASSA	ORNIA INSTITUTE OF TECHNOLOGY CHUSETTS INSTITUTE OF TECHNOLOGY		CABLE SPECIFICATION	V25A-110
NCES:	3. DO NOT SCALE FROM DRAWING.	SYSTEM	SUB-SYSTEM	DESIGNER B. ABBOTT	JUN/05/2012 SIZE DWG. NO.	REV.

NOTES: (UNLESS OTHERWISE SPECIFIED)

a. J1 CONNECTOR SHELL - PEEK VICTREX 450GL30. b. BACKSHELLS - STAINLESS STEEL WITH VENT HOLE. c. CONTACTS - BERYLLIUM COPPER ALLOY C17300, 0.000050 MIN. GOLD OVER NICKEL. d. HARDWARE: STAINLESS STEEL, PASSIVATED. A. MATERIAL:

e. PEEK BRAID - PEEK VICTREX GRADE TDS-450CA30 CARBON LOADED - SUPPLIED BY LIGO.

CABLE 25 COND. 28 AWG, (STRANDED) WITH 2 LAYERS OF KAPTON TAPE. 12 TWISTED PAIRS (4 TO 5 TWISTS PER INCH) + 1 WIRE. OVERALL 40AWG COPPER BRAID 50% COVERAGE - SUPPLIED BY LIGO. OVERALL PEEK BRAID MIN. 50% COVERAGE.

C. CONNECTORS WILL BE SUPPLIED WITH HARDWARE. SCREWS SHOULD BE THE PROPER LENGTH FOR MATING.

DIMENSIONS ARE IN

OLERANCES:

ANGULAR±°

.XXX ±

SEI CHECKER APPROVAL

DESIGNER B. ABBOTT JUN/05/2012 SIZE DWG. NO. SCALE: 1:1 PROJECTION:

V6

Material < not specified>

μinch

DRAFTER E. BROWN

D1100152