
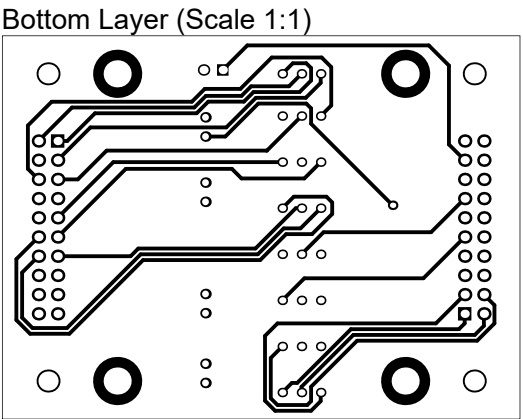
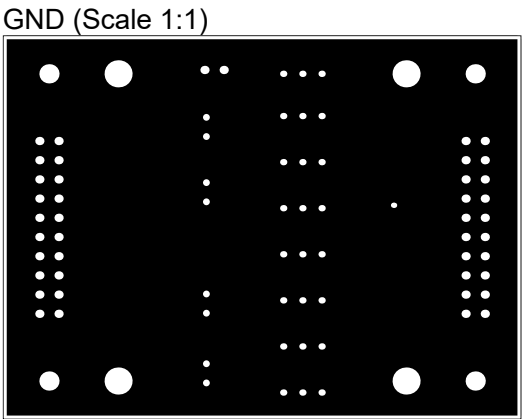
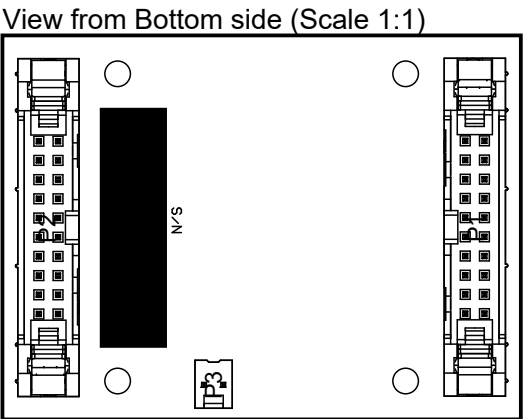
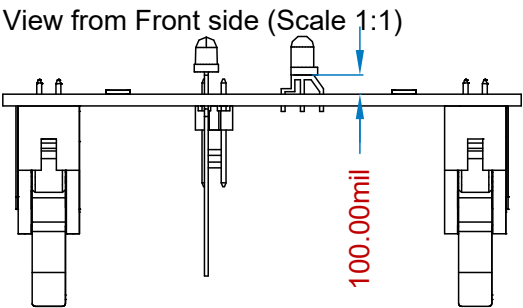
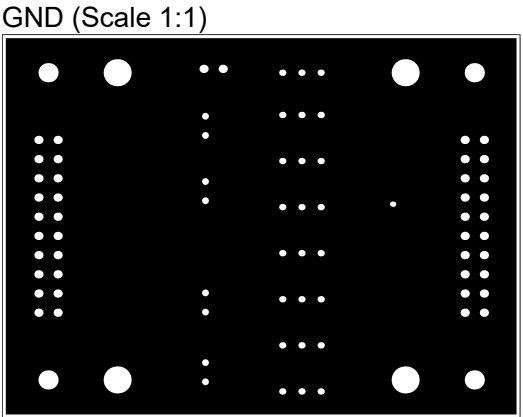
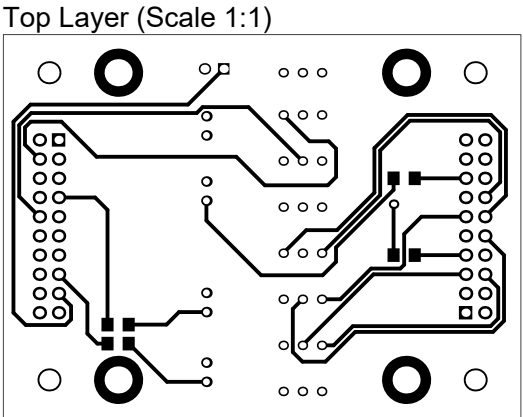
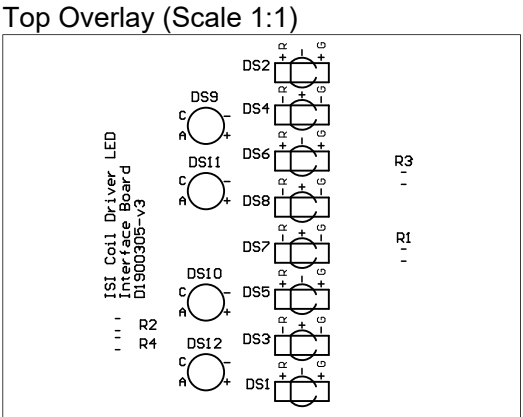


1

1

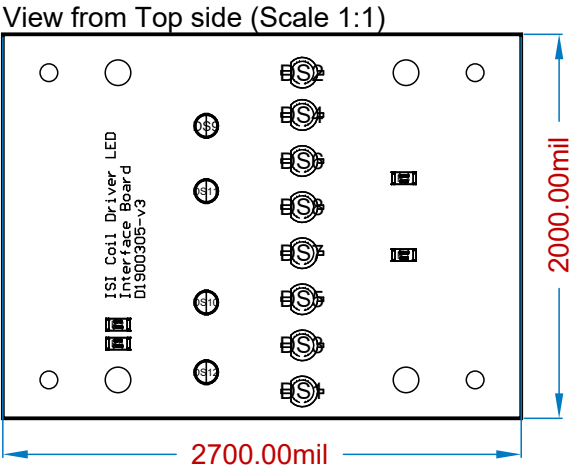

Layer Stack Legend


Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Paste			Paste Mask	GTP
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.40mil	Solder Resist	Solder Mask	GTS
Copper	Top Layer	1.40mil		Signal	GTL
Prepreg		7.50mil	FR-4	Dielectric	
Copper	GND	1.40mil		Internal Plane	GP1
Prepreg		40.60mil	Dielectric		
Copper	GND	1.40mil		Internal Plane	GP2
Prepreg		7.50mil	FR-4	Dielectric	
Copper	Bottom Layer	1.40mil		Signal	GBL
Surface Material	Bottom Solder	0.40mil	Solder Resist	Solder Mask	GBS
	Bottom Overlay			Legend	GBO
	Bottom Paste			Paste Mask	GBP

Total thickness: 62.00mil

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
◇	1	28.00mil	Plated	None
○	24	33.00mil	Plated	None
□	8	35.43mil	Plated	None
◇	42	43.00mil	Plated	None
⊗	4	100.00mil	Plated	None
⊕	4	141.00mil	Plated	None
	83 Total			

Drill Drawing View (Scale 1:1)

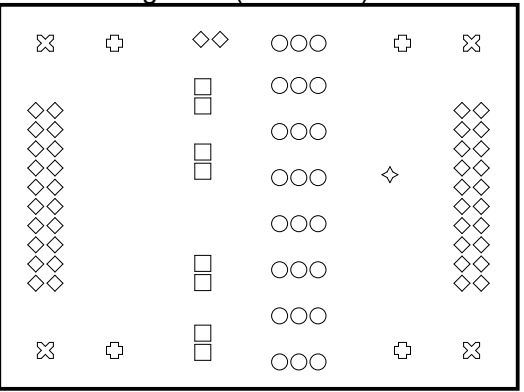

2

2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LIGO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPRIETARY AND CONFIDENTIAL

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	LIGO		
		DIMENSIONS ARE IN INCHES		DRAWN	Dean Schaeztl	1/14/2020	TITLE	
		TOLERANCES:		CHECKED				
		FRACTIONAL±		ENG APPR.				
		ANGULAR: MACH± BEND ±		MFG APPR.			ISI Coil Driver LED Interface Board	
		TWO PLACE DECIMAL ±		Q.A.				
		THREE PLACE DECIMAL ±		COMMENTS:				
		INTERPRET GEOMETRIC TOLERANCING PER:					SIZE	DWG. NO.
		MATERIAL						D1900305-v3
NEXT ASSY	USED ON	FINISH					SCALE: 1:1	WEIGHT:
APPLICATION		DO NOT SCALE DRAWING					SHEET 1 OF 1	

A

B

C

D